ATI PRO TECHNOLOGIES

India's **Leading** Pro Audio & DJ Lighting Company.



PRODUCT CATALOGUE

45+

YEARS OF EXCELLENCE

We don't follow trends - we create them.
One company **10** powerful brands with **1000+** products

PRO AUDIO & INSTALLATION

ATi pro ENGINEERED IN ITALY · YOGIPRO · AUDIOFLIX · GLABS · AtiproAcoustics · KRYSTAL TONE

PRO LIGHTING & STAGE SOLUTION

ATi pro ENGINEERED IN ITALY · PRO LIGHTS · ATi SFX · ATiPOWER

WHO WE ARE?

Atipro Technologies is a leading company in pro audio and lighting R&D. We believe "Premium Technology should be affordable," so we design top-quality products across multiple brands for the masses. Collaborating with global R&D teams, we develop cost-effective solutions tailored for the Indian market.

"ATIpro is a **REVOLUTION,** whatever ATIpro do is an **INNOVATION**"



GUJARAT EXPO



DELHI EXPO 2025



KERALA EXPO 2024



MUMBAI EXPO 2025

"**ADVANCEMENT** IS THE WAY TO **ACHIEVEMENT**"

In 1982 Atipro Technologies started with 2 speaker models in India but today it's one of the most Innovative Company in Professional Audio and Lighting Industry. The Company is responsible for bringing many trends in India which other companies follow.We have many brands under the Atipro Technologies umbrella like Atipro Audio, Atipro Light, Yogipro, Audioflix & Glabs.



Mr. Rakesh Jain
Managing Director

At **Atipro Technologies,** our leadership drives our innovation and growth. ***Mr. Rakesh Jain's*** extensive industry experience and visionary guidance have been pivotal in our success. His deep understanding of the audio and lighting industry, commitment to quality, and strategic insights have established Atipro Technologies as a trusted brand, inspiring our team to



Mr. Gaurav Jain
CEO

Mr. Gaurav Jain's expertise in business development and market strategy has driven our expansion and success. His focus on operational excellence and strong client relationships keeps Atipro Technologies competitive.

Under his leadership, we deliver top-quality products at competitive prices, meeting customer needs. His vision and guidance propel our mission to lead in the professional audio and lighting industry.

First Company To Bring Innovative Technologies & Focus on Original Design Concepts

India's Fastest Growing Company in Last 5 Years

ranker.com has placed ATIpro Technologies among top 100 brand in the segment

10,00,000+ Satisfied Customers

ATIPRO (AUDIO)	-05
TECHNOLOGY TREE	-06
PROMAX SERIES	-07
NEO SERIES	-09
FERRITE SERIES	-13
HD SERIES	-22
TITANIUM SERIES	-25
CEILING FANS/ SPEAKERS	-26
NEO/ FERRITE DRIVER UNIT	-27
PRESSURE MID	-30
NETWORK PLATE	-31
DJ BELTS/ SPEAKER WIRES	-31
INDIAN SERIES NETWORKS	-32
DIAPHRAGM/ RECONE KIT	-33
DJ AMPLIFIERS	-34
EQUALIZER/ CROSSOVERS	-53
WIRED/ WIRELESS MICS & STANDS	-55
PIN & CONNECTORS	-56
LINE ARRAY	-59
CABINETS	-61
DJ & LIVE MIXERS	-64
SPEAKER PARTS & MATERIALS	-69
ATIPRO (LIGHTING)	-70
TECHNOLOGY TREE	-71
LED PAR LIGHTS	-72
SHARPEE LIGHTS	-74
CURTAIN WALL LIGHTS	-76
MOVING WASH LIGHTS	-76
PIXEL MATRIX	-77
BLINDER	-77
SPARE PARTS	-79
LASERS	-81
SMOKE MACHINE	-84
LED FOLLOW/ CONTROLLERS	-87
YOGIPRO	-91
NEO/ FERRITE SPEAKERS	-92
FERRITE DRIVERS	-97
NETWORK PLATES	-98
AMPLIFIERS	-98
AUDIOFLIX	-100
NEO/ FERRITE SPEAKERS	-101
HF/ NETWORK PLATES	-103
DIAPHRAGM	-104
AMPLIFIERS	-105
GLABS	-106
NEO/ FERRITE SPEAKERS	-107
AMPLIFIERS	-109
ZOOMPRO	-119
SHARPEE LIGHT	-120
ATIPRO FAMILY	-123
DEALER NETWORK	-126

CONSUMER ELECTRONICS BRANDS

BUSINESS OF SERVICES

siliconindia

SILICONINDIA.COM

Ati-Pro

recognized by siliconindia *Magazine as*

siliconindia TOP 10 CONSUMER ELECTRONICS BRANDS -2022

Through this Award, we acknowledge and applaud the institute's myriad courses & programs, and their ingenuity to leverage the best practices in presenting unique methodologies to address learning outcomes

Emmanuel Christi Das
Managing Editor

ATIPRO TECHNOLOGIES IN MEDIA

ANI



Gaurav Jain, CEO, ATI Pro Technologies

Renowned pro audio & lighting technology company 'ATI Pro Technologies' eyes aggressive expansion plans for 2023

indiasilicon

Ati-Pro

Taking Audio and Lighting Products To Next Level

jective is to give the best value for money to our custome and build a long-term relationship with them," states Gaura Jain, CEO of Ati-Pro. The CEO credits the Ati-Pro's succe to its highly motivated team of employees and managemen who has worked round the clock to achieve the company goals and vision.

Ever since its inception, Ati-Pro has been perfecting i approach to create and deliver one of the most advanced au dio and lighting systems in the market. Apart from sever years of experience and knowledge in the space, the con pany also has a strong Technical Team and latest Design Development Capability. They also have a state-of-the-a

dailyhunt

Renowned pro audio & lighting technology company 'ATI Pro Technologies' eyes aggressive expansion plans for 2023

ANI PR 6 April, 2023 02:13 pm IST

Gaurav Jain, CEO, ATI Pro Technologies

Text Size: A- A+

New Delhi [India], April 6 (ANI/SRV): Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set to expand its horizons with an upcoming corporate in the heart of New Delhi. With a vision to be a one-stop solution for technologically advanced products, ATI Pro's upcoming showroom will consist of various divisions under one roof. Spread across an area of 60000 sq. ft; the corporate space will incorporate an elaborate showroom, exclusive demo rooms, an exports & imports department, a dedicated service centre, a logistics division and many more. Moreover ATI Pro audio is now ATI Pro technologies we created many brands like yogipro and audioflix in order to cater to mass customer according to their budget with medium quality.

Most Popular

Glittering GDP, high poverty: The paradox of Karnataka's unequal growth

LOKMAT TIMES

Business News | Renowned Pro Audio & Lighting Technology Company 'ATI Pro Technologies' Eyes Aggressive Expansion Plans for 2023

Get latest articles and stories on Business at LatestLY. Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set to expand its horizons with an upcoming corporate in the heart of New Delhi. With a vision to be a one-stop solution for technologically advanced products, ATI Pro's upcoming showroom will consist of various divisions under one roof. Spread across an area of 60000 sq. ft; the corporate space will incorporate an elaborate showroom, exclusive demo rooms, an exports & imports department, a dedicated service centre, a logistics division and many more. Moreover ATI Pro audio is now ATI Pro technologies we created many brands like yogipro and audioflix in order to cater to mass customer according to their budget with medium quality. Products with the ATI Pro brand will be supreme brand in terms of quality and latest technological trends.

ThePrint

Renowned pro audio & lighting technology company 'ATI Pro Technologies' eyes aggressive expansion plans for 2023

32d

New Delhi [India], April 6 (ANI/SRV): Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set to expand its horizons with an upcoming corporate in the heart of New Delhi. With a vision to be a one-stop solution for technologically advanced products, ATI Pro's upcoming showroom will consist of various divisions under one roof. Spread across an area of

LATESTLY

Renowned pro audio & lighting technology company 'ATI Pro Technologies' eyes aggressive expansion plans for 2023

By ANI | Published: April 6, 2023 01:55 PM

New Delhi [India], April 6 (/SRV): Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set ...

New Delhi [India], April 6 (/SRV): Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set to expand its horizons with an upcoming corporate in the heart of New Delhi. With a vision to be a one-stop solution for technologically advanced products, ATI Pro's upcoming showroom will consist of various divisions under one roof. Spread across an area of 60000 sq. ft; the corporate space will incorporate an elaborate showroom, exclusive demo rooms, an exports & imports department, a dedicated service centre, a logistics division and many more. Moreover ATI Pro audio is now ATI Pro technologies we created many brands like yogipro and audioflix in order to cater to mass customer according to their budget with medium quality. Products with the ATI Pro brand will be supreme brand in terms of quality and latest technological trends.

ZEENEWS

Renowned pro audio & lighting technology company 'ATI Pro Technologies' eyes aggressive expansion plans for 2023

New Delhi [India], April 6 (ANI/SRV): Incepted in 2013, leading pro audio & lighting brand 'ATI Pro' is set to expand its horizons with an upcoming corporate in the heart of New Delhi. With a vision to be a one-stop solution for technologically advanced products, ATI Pro's upcoming showroom will consist of various divisions under one roof. Spread across an area of 60000 sq. ft; the corporate space will incorporate an elaborate showroom, exclusive demo rooms, an exports & imports department, a dedicated service centre, a logistics division and many more. Moreover ATI Pro audio is now ATI Pro technologies we created many brands like yogipro and audioflix in order to cater to mass customer according to their budget with medium quality. Products with the ATI Pro brand will be supreme brand in terms of quality and latest technological trends.

ATIPRO TECHNOLOGIES IN SOCIAL MEDIA

@atiprotech

150K+ Followers

@atiprotech

41K+ Subscribers

atiprotech

123K+ Followers

We are trendsetter on social media in the DJ industry

ATi pro®

ENGINEERED IN ITALY

INDIA'S LEADING PRO AUDIO BRAND

We are working on various Technologies to give our customer enhanced experience on all our products.

"TECHNOLOGY TREE"

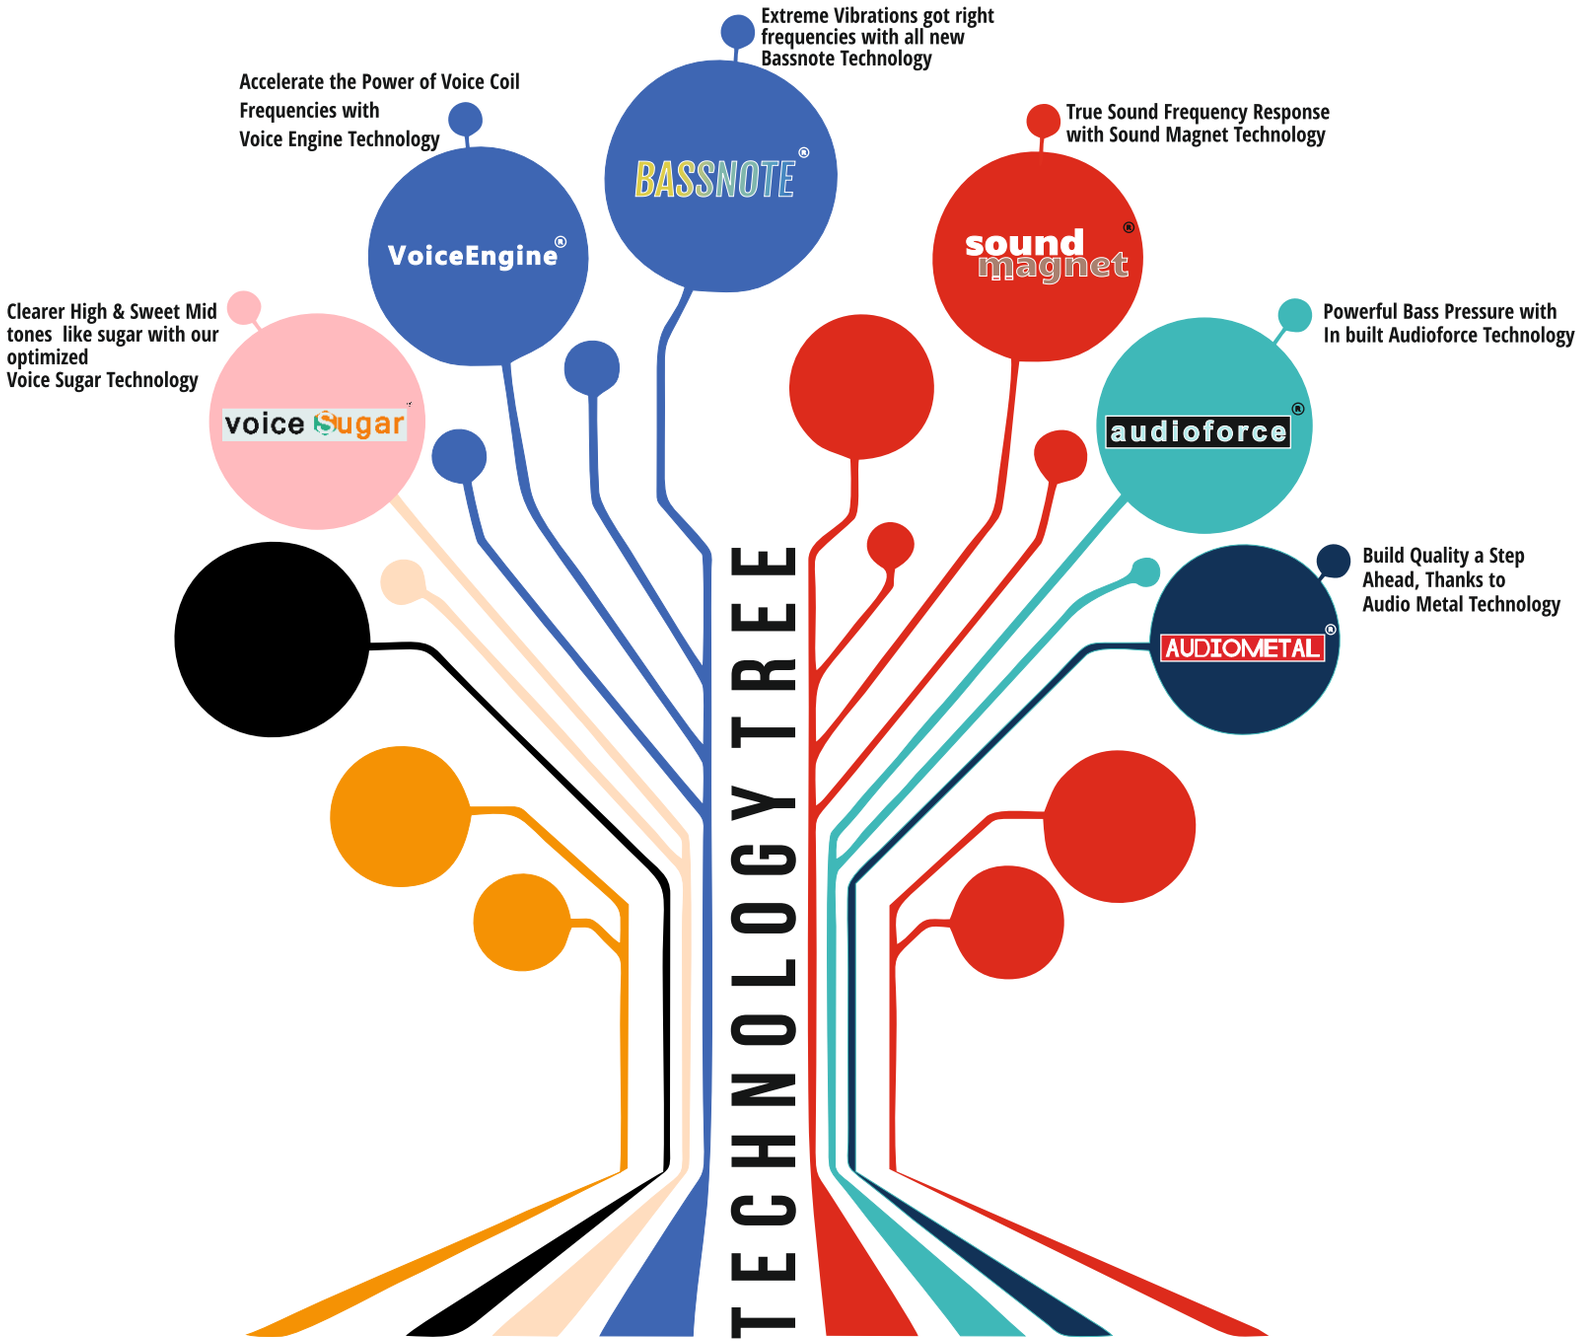

ATi pro®

ENGINEERED IN ITALY

PROMAX SERIES

PROMAX SERIES



YX13X400

13" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 400+75 Watts
Sensitivity – 96 dB
Frequency Range – 50Hz-3.0KHz
Magnet Diameter – 190x85x20
Voice Coil Diameter – 3 inch

PROMAX SERIES



YX13X500

13" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 500+50 Watts
Sensitivity – 96 dB
Frequency Range – 50Hz-3.0KHz
Magnet Diameter – 200x95x20
Voice Coil Diameter – 3.5 inch

PROMAX SERIES



YX16X301

16" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 400+40 Watts
Sensitivity – 97 dB
Frequency Range – 45Hz-3KHz
Magnet Diameter – 190x85x20
Voice Coil Diameter – 3 inch

PROMAX SERIES



YX16X351

16" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 500+50 Watts
Sensitivity – 97 dB
Frequency Range – 45Hz-3KHz
Magnet Diameter – 200x95x20
Voice Coil Diameter – 3.5 inch

PROMAX SERIES



YX16X800

16" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 800+80 Watts
Sensitivity – 97.5 dB
Frequency Range – 45Hz-3KHz
Magnet Diameter – 200x95x20
Voice Coil Diameter – 4 inch In/out

PROMAX SERIES



YX16X1200

16" Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 1200+100 Watts
Sensitivity – 97 dB
Frequency Range – 35Hz-2.5KHz
Magnet Diameter – 253x140x30
Voice Coil Diameter – 4.5 inch (4 Layer) In/out

FOLLOW US @ /ATIPROTECH

PROMAX SERIES



YX19X451HD

19” Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 1999+200 Watts
Sensitivity – 97.5 dB
Frequency Range – 35Hz-2.0kHz
Magnet Diameter – 253x140x30 Y35
Voice Coil Diameter – 4.5 inch (4 Layer)

PROMAX SERIES



YX19X1200HD

19” Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 2000 Watts
Sensitivity – 97 dB
Frequency Range – 35Hz-2.0KHz
Magnet Diameter – 220x110x20 Y35
Voice Coil Diameter – 4 inch In/out (4 Layer)

PROMAX SERIES



YX19X1850HD

19” Aluminium Basket Woofer
Professional Low Frequency Speaker

Power Rating – 2500 Watts
Sensitivity – 97.5 dB
Frequency Range – 35Hz-1.5KHz
Magnet Diameter – 280x140x30 Y35
Voice Coil Diameter – 5 inch (4 Layer) In/out

PROMAX SERIES



YX19X1855HD

19” Aluminium Basket Woofer
Professional Low Frequency Speaker

5.5” Copper Voice Coil
97.5dB 1W@1m Sensitivity
35Hz-1.5Khz Frequency Range
1999+300 W Program Power Handling
Ferrite Magnet Structure



The PRO MAX Series is a next-generation speaker lineup engineered to deliver high power output, deep bass, and crystal-clear sound.

Whether it's a DJ setup, live performance, or large-scale event, PRO MAX is built to create impact, not just sound.

FOLLOW US @ /ATIPROTECH

NEO SERIES

NEO SERIES



JB60F

Premium Design + Economy Price

Power Rating	350W
Norminal Impedence	8 Ohm
Frame	Aluminium Brushed
Voice Coil	2"TCCAR + **Dual Coil**
Size / Net Wt.	10" / 2.8 kg
Magnet Size	45x12 N40
Frequency	50 Hz - 3 KHz

10

NEO SERIES



10NDL64

High Performance

Power Rating	400W
Norminal Impedence	16 Ohm
Frame	Aluminium
Voice Coil	3" CCAW
Size / Net Wt.	10" / 3 Kg
Magnet Size	74x12 N40
Frequency	50 Hz - 3.5 KHz

10

NEO SERIES



10NDL85

NEW LAUNCH

HEAT SINK TECHNOLOGY

Power Rating	500W
Norminal Impedence	16 Ohm
Frame	Aluminium
Voice Coil	3.5"
Sensitivity	96.5dB
Frequency	60Hz - 4 Khz
Magnet Size	80x10/ N40

10

NEO SERIES



LF12N75J

HOT SELLING

Power Rating	450W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	12"/ 3.9kg
Magnet Size	70x12 N40
Frequency	50Hz - 3.5 Khz

12

NEO SERIES



YX12N76

HIGH PERFORMANCE

Power Rating	650W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" CCAW
Size / Net Wt.	12" / 3.8kg
Magnet Size	25x12x12 N40
Frequency	50Hz - 1.5 Khz

12

NEO SERIES



HP2262

PREMIUM MODEL

Power Rating	700W
Norminal Impedence	8 Ohm
Frame	Aluminium Brushed
Voice Coil	3" CCAW- **Dual Layer**
Size / Net Wt.	12" / 4kg
Magnet Size	70x12 N40
Frequency	40 Hz - 2 KHz

12

FOLLOW US @ /ATIPROTECH

ATI pro
ENGINEERED IN ITALY

NEO SERIES

voice Sugar



MB12N351

HIGH TONE QUALITY

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" In / Out
Size / Net Wt.	12" / 4.8 kg
Magnet Size	80x10 N40
Frequency	40 Hz - 3.5 KHz

12

NEO SERIES

voice Sugar



LF12N401

India's Most Powerful 12" Neo Speaker

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	12" / 7 kg
Magnet Size	90x14 N40
Frequency	45 Hz - 2 KHz

12

12HCX76

NEO SERIES

voice Sugar

NEW PRODUCT



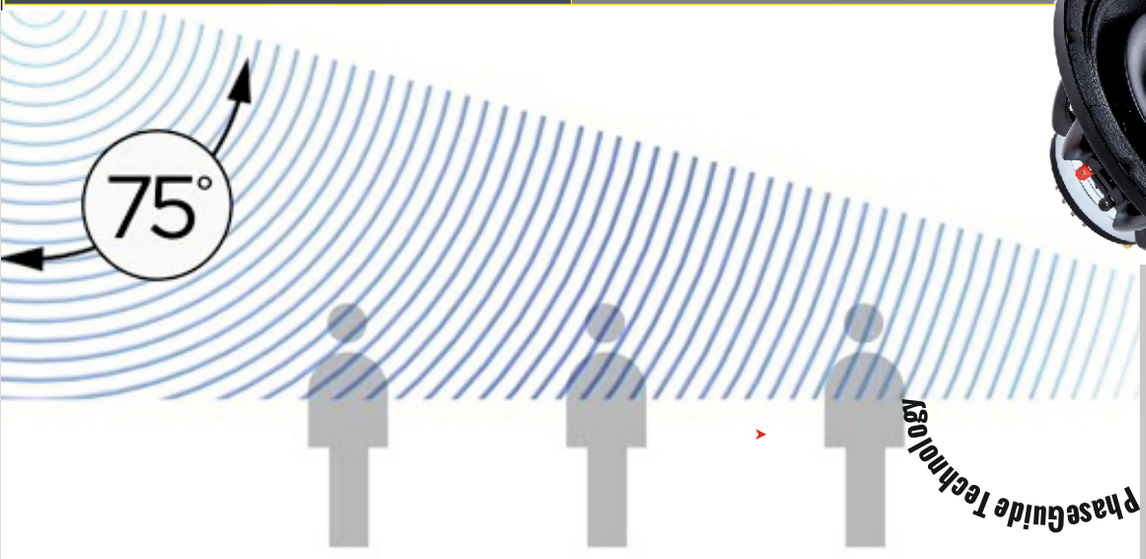

Worlds First Neo Speaker with PhaseGuide Technology

Provide Good Coverage Full Range Performance Best in Class with PhaseGuide Technology

LF UNIT
12" Woofer, Aluminium Basket
VC Size: 3" SV Inside-Out
Magnet: 120x80x8 N40 Neodymium
Sensitivity: 96db
Impedance: 8 Ohm
Power (RMS): 600W
Power (MAX): 1200W
Frequency Range: 55Hz - 4KHz

HF Unit
VC Size: 3" SV CCAR
Magnet: 120x80x8 N40 Neodymium
Sensitivity: 105db
Impedance: 8 Ohm
Power (RMS): 110W
Power (MAX): 220W
Frequency Range: 500Hz - 19KHz

FOLLOW US @ /ATIPROTECH

ATI pro ENGINEERED IN ITALY

NEO SERIES

voice Sugar



YX15N76

HIGH PERFORMANCE

HEAT SINK TECHNOLOGY

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" CCAW
Size / Net Wt.	15" / 4kg
Magnet Size	25x12x12 N40
Frequency	35 Hz - 3.5 KHz

15

NEO SERIES

voice Sugar



2265HPL

PREMIUM MODEL

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium Brushed
Voice Coil	3" CCAW - **Dual Layer**
Size / Net Wt.	15" / 4kg
Magnet Size	70x12 N40
Frequency	40 Hz - 2.0 Khz

15

NEO SERIES

voice Sugar



MB15N351

HIGH TONE QUALITY

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" In / Out
Size / Net Wt.	15" / 5 kg
Magnet Size	25x12x12 N40
Frequency	40 Hz - 3.5 KHz

15

(4 Layer Voice Coil)

NEO SERIES

voice Sugar



LF15N401

India's Most Powerful 15" Neo Speaker

Power Rating	900W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 7.5kg
Magnet Size	90x14 N40
Frequency	45Hz - 1.5Khz

15

NEO SERIES



YX18SW115 - HD

HIGH BASS

ATI PRO EXCLUSIVE DESIGN

Power Rating	1800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5" SV In/Out
Size / Net Wt.	18" / 10 kg
Magnet Size	105x50x15 N40
Frequency	35 Hz - 2.0 KHz

18

NEO SERIES



YX18ND127 - HD

India's Most Powerful 18" Neo Speaker

2024 SERIES

Power Rating	1999W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	5" SV In / Out
Size / Net Wt.	18" / 10 kg
Magnet Size	90x14 N40
Frequency	35 Hz - 2.5 KHz

18

FOLLOW US @ /ATIPROTECH

ATI pro
ENGINEERED IN ITALY

NEO SERIES



21NW152 - HD

Power Rating	2700W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	6” In/Out
Size/ Net wt.	21”/ 12.5 Kgs
Magnet	150x50x15 N40
Frequency	30 Hz - 2 Khz

21

DID YOU KNOW?

ATI PRO Speakers are engineered to deliver powerful performance, crystal-clear clarity, and unmatched durability — built for professionals who demand perfection in every beat.

FERRITE SERIES

FERRITE SERIES



1076Y

MALAYSIAN CONE

India's Most Powerful 10" Ferrite DJ Speaker

Power Rating	425W
Norminal Impedence	8 Ohm
Frame	Aluminium Yellow
Voice Coil	3" CCAW
Size / Net Wt.	10" / 6 kg
Magnet Size	190x90x20 Y35
Frequency	50 Hz - 3 KHz

10

FERRITE SERIES



HY1201

PREMIUM MODEL

Power Rating	250W
Norminal Impedence	8 Ohm
Frame	Metal
Voice Coil	2.5 SV
Size / Net Wt.	12" / 4 kg
Magnet Size	156x80x20 Y35
Frequency	50 Hz - 3.5 KHz

12

FERRITE SERIES



ATI 12 FRX

Power Rating	150W
Norminal Impedence	6.2 Ohm
Frame	Metal
Voice Coil	1.5"/ 48.5MM
Size / Net Wt.	12"/ 3.5Kgs
Magnet Size	156x75x20 Y35
Frequency	80 Hz -15 KHz

12

FERRITE SERIES



HY1202

Economy Choice For Line Array

Power Rating	400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	2.5"
Size / Net Wt.	12" / 5 kg
Magnet Size	190x90x20 Y35
Frequency	45 Hz - 3 KHz

12

FERRITE SERIES



LF12G301

India's First 400W Speaker With Heat Sink Technology

Power Rating	450W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" CCAW - In / Out
Size / Net Wt.	12" / 7 kg
Magnet Size	190x90x20 Y35
Frequency	50Hz - 2.5Khz

12

2024 SERIES

FERRITE SERIES



YX12X301 II

COPPER COOLING RING

PREMIUM MODEL

Power Rating	475W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" in / Out
Size / Net Wt.	12"/ 7.5 Kg
Magnet Size	190x20 Y35
Frequency	50 Hz - 3.0 KHz

HEAT SINK TECHNOLOGY VER 3.0

12

2024 SERIES
ATI PRO EXCLUSIVE DESIGN

FOLLOW US @ /ATIPROTECH

ATi pro ENGINEERED IN ITALY

FERRITE SERIES

sound magnet VoiceEngine



1276Y

SUPER TONE QUALITY

MALAYSIAN CONE

Power Rating	510W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV In / Out
Size / Net Wt.	12" / 8 Kg
Magnet Size	190x20 Y35
Frequency	45 Hz - 3.0 KHz

12

FERRITE SERIES

sound magnet VoiceEngine



MB12X351

COPPER COOLING RING

PREMIUM MODEL

Power Rating	500W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	3.5" SV
Size/ Net wt.	12"/ 8.7 Kgs
Magnet	200x100x25 Y35
Frequency	50 Hz - 3.0 Khz

12

FERRITE SERIES

sound magnet VoiceEngine



YX 12 X 351 TURBO

COPPER COOLING RING

PREMIUM MODEL

Power Rating	600W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	3.5" SV
Size/ Net wt.	12"/ 10 Kgs
Magnet	190x30 Y35
Frequency	50 Hz - 3.0 Khz

HEAT SINK TECHNOLOGY VER 3.0

12

FERRITE SERIES

sound magnet



LF12G401

INDIA'S MOST POWERFUL 12" FERRITE DJ SPEAKER

Power Rating	700W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	12" / 9.5kg
Magnet Size	220x110x20 Y35
Frequency	40Hz - 2.0 Khz

12

FERRITE SERIES



HY1501

Power Rating	360
Norminal Impedence	8 Ohm
Frame	Iron
Voice Coil	3" SV
Size / Net Wt.	15" / 5 kg
Magnet Size	170x80x20 Y35
Frequency	45Hz - 3.0 Khz

13

FERRITE SERIES



HY1502

Power Rating	400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 7 kg
Magnet Size	190X90X20 Y35
Frequency	45Hz - 3.0 Khz

13

FOLLOW US @ /ATIPROTECH

ATI pro
ENGINEERED IN ITALY

FERRITE SERIES

sound magnet



* 15PS76/PS400*

PS400 - ECONOMY MODEL

HOT SELLING MODEL

Power Rating	425W/ 400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 9 Kg
Magnet Size	190x90x20 Y35
Frequency	36Hz - 4Khz/ 50Hz - 3.5Khz

15

FERRITE SERIES

sound magnet VoiceEngine



BM400

Power Rating	400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 9 Kg
Magnet Size	190x25 Y35
Frequency	50 Hz - 3.5 KHz

15

FERRITE SERIES

sound magnet VoiceEngine



YX15X301 II

COPPER COOLING RING

PREMIUM MODEL

Power Rating	460W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 9.5 Kg
Magnet Size	190x85x20 Y35
Frequency	45Hz - 3.5KHz

HEAT SINK TECHNOLOGY VER 3.0

2024 SERIES
ATI PRO EXCLUSIVE DESIGN

15

FERRITE SERIES

sound magnet VoiceEngine



ZX15X301

HEAT SINK TECHNOLOGY

Power Rating	450W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 9.5 Kg
Magnet Size	190x90x20 Y35
Frequency	35Hz - 2.5KHz

ATI PRO EXCLUSIVE 2024 SERIES

15

FERRITE SERIES

sound magnet VoiceEngine



15PHL76

CLEAR SOUND + TECHNOLOGY

25% MORE LOUDNESS

Power Rating	500W (+25% Loudness)
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15"/ 9.5 Kg
Magnet Size	190x20 Y35
Frequency	36Hz - 4KHz

ATI PRO NEW LAUNCH

15

FERRITE SERIES

sound magnet VoiceEngine



ZX15X351

HEAT SINK TECHNOLOGY

Power Rating	550W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" CCAW
Size / Net Wt.	15" / 11 kg
Magnet Size	190x95X25 Y35
Frequency	35Hz - 3KHz

HEAT SINK TECHNOLOGY VER 3.0

2024 SERIES
ATI PRO EXCLUSIVE SERIES

15

FOLLOW US @ /ATIPROTECH

FERRITE SERIES

sound magnet VoiceEngine



YX15X351 II

COPPER COOLING RING

PREMIUM MODEL

2024 SERIES

Power Rating	550W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" SV
Size / Net Wt.	15" / 11 kg
Magnet Size	190x95x25 Y35
Frequency	45 Hz - 3.0 KHz

15

FERRITE SERIES



LX15600

ECONOMY MODEL

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 11.4 kg
Magnet Size	220x110x25 Y35
Frequency	35 Hz - 2.0 KHz

15

FERRITE SERIES

sound magnet VoiceEngine



YX15X635

UNIQUE FRAME DESIGN

HEAT SINK TECHNOLOGY

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 11.4 Kg
Magnet Size	220x110x25 Y35
Frequency	45 Hz - 3.0 KHz

15

FERRITE SERIES

sound magnet VoiceEngine



PHL100

25% MORE LOUDNESS

CLEAR SOUND + TECHNOLOGY

ATI PRO NEW LAUNCH

Power Rating	750W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 11.4 Kg
Magnet Size	220x110x25 Y35
Frequency	45Hz-3.0Khz

15

FERRITE SERIES

sound magnet VoiceEngine



YX15X600 II

COPPER COOLING RING

ATI PRO EXCLUSIVE FRAME DESIGN

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15"/ 11.4 kg
Magnet Size	220x110x25 Y35
Frequency	45Hz-3.0Khz

HEAT SINK TECHNOLOGY VER 3.0

PREMIUM MODEL

15

FERRITE SERIES

sound magnet VoiceEngine



ZX15X600

HEAT SINK TECHNOLOGY

2024 SERIES

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 11.4 kg
Magnet Size	220x110x25 Y35
Frequency	40Hz - 2.5KHz

15

FOLLOW US @ /ATIPROTECH

ATI pro ENGINEERED IN ITALY

FERRITE SERIES

sound magnet VoiceEngine



PD1560

HOT SELLING MODEL

2024 SERIES
ATI PRO EXCLUSIVE SERIES

Power Rating	1050W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 12 Kg
Magnet Size	220x110x30 Y35
Frequency	55Hz - 3.5Khz

15

FERRITE SERIES

sound magnet



15TBW100

HOT SELLING MODEL

Power Rating	1000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 12 Kg
Magnet Size	220x30 Y35
Frequency	40Hz - 2.0 Khz

15

FERRITE SERIES

sound magnet VoiceEngine



P2226

HOT SELLING MODEL

Power Rating	1000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 12 Kg
Magnet Size	220x110x20 Y35
Frequency	40Hz - 3.5KHz

15

FERRITE SERIES

sound magnet BASSNOTE VoiceEngine



YX15X451 II

INDIA'S MOST POWERFUL 15" SPEAKER WITH 4.5" VOICE COIL

COPPER COOLING RING

ATI PRO EXCLUSIVE FRAME DESIGN

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5" In / Out
Size / Net Wt.	15" / 12.5 Kg
Magnet Size	250x140x25 Y35
Frequency	45Hz - 2KHz

HEAT SINK TECHNOLOGY VER 3.0 **PREMIUM MODEL**

15

FERRITE SERIES



LX18400

ECONOMY MODEL

Power Rating	1000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 12 kg
Magnet Size	220x110x25 Y35
Frequency	35Hz - 2.5KHz

18

FERRITE SERIES

sound magnet BASSNOTE



YX18X635

UNIQUE FRAME DESIGN

SIDE HEAT SINK TECHNOLOGY

Power Rating	1200W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 13 Kg
Magnet Size	220x110x25 Y35
Frequency	35Hz - 2.0 Khz

18

FOLLOW US @ /ATIPROTECH

FERRITE SERIES

sound magnet BASSNOTE VoiceEngine



ATI PRO EXCLUSIVE FRAME DESIGN 2024 SERIES

YX18X600 II

COPPER COOLING RING

PREMIUM MODEL

Power Rating	1300W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4"In / Out
Size / Net Wt.	18" / 12.5 kg
Magnet Size	220x110x25 Y35
Frequency	40Hz - 2.0 Khz

HEAT SINK TECHNOLOGY VER 3.0

FERRITE SERIES

BASSNOTE



2024 SERIES

HY1822

LONG THROW BASS

MALAYSIAN GLASS FIBER CONE

Power Rating	1200W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 13.5 Kg
Magnet Size	220x110x25 Y35
Frequency	35Hz - 2.5 Khz

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



ATI1200

HEAT SINK TECHNOLOGY

Power Rating	1200W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 12.5 Kg
Magnet Size	220x110x25 Y35
Frequency	35 Hz - 2.5 KHz

FERRITE SERIES



18TBW100®

HOT SELLING MODEL

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 14 kg
Magnet Size	220x110x30 Y35
Frequency	35Hz - 1KHz

FERRITE SERIES

sound magnet audioforce



18TBW200®

HEAT SINK TECHNOLOGY

Power Rating	1550W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4"In / Out
Size / Net Wt.	18" / 14 kg
Magnet Size	220x110x30 Y35
Frequency	35Hz - 1.0 Khz

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



18TLW3000®

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	**4" Dual Layer + Dual Winding**
Size / Net Wt.	18" / 18 kg
Magnet Size	220x110x30 Y35
Frequency	30Hz - 2.0 Khz

FOLLOW US @ /ATIPROTECH

ATI pro
ENGINEERED IN ITALY

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



PD2160 PLATINUM

HOT SELLING MODEL

Power Rating	2700W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	6" In / Out
Size / Net Wt.	21" / 20 kg
Magnet Size	330x170x25 Y35 **(4PC Magnet)**
Frequency	35 Hz - 1.5 KHz

2024 SERIES

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



PD2460 PLATINUM

WORLD'S MOST POWERFUL PRACTICAL DJ SPEAKER

Power Rating	3000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	6" In / Out
Size / Net Wt.	24"/ 31.5 kg
Magnet Size	330x170x25 Y35 **(4PC Magnet)**
Frequency	35Hz - 1.5Khz

Strong Indian Brand Positioning - Proudly powering sound across India, ATI PRO Speakers combine strength, reliability, and high-performance audio to meet the demands of every stage, every DJ, and every event.

DID YOU KNOW?

HD SERIES (4 Layer Coil)

FERRITE SERIES



HD SERIES
YX15X800-HD

Power Rating	1100W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4″ 4 Layer In/ Out
Size/ Net wt.	15'/ 24.8 Kgs
Magnet Size	(220x110x30) /Y35
Frequency	40 Hz - 3 Khz

15

FERRITE SERIES



HD SERIES
YX15X451-HD

Power Rating	1500W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4.5″ 4 Layer In/ Out
Size/ Net wt.	15'/ 24.8 Kgs
Magnet Size	(253x140x30) /Y35
Frequency	35 Hz - 3 Khz

15

FERRITE SERIES



HD SERIES
15TBW200 - HD

Power Rating	1400W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4 (2+2) 4 Layer In/ Out
Size/ Net wt.	15′
Frequency	35 Hz - 1.5 Khz

15

FERRITE SERIES



HD SERIES
PD1570-HD

Power Rating	1400W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4″ (2+2) 4 Layer In/ Out
Size/ Net wt.	15′
Magnet Size	(220x110x20) 2 PC/Y35
Frequency	40Hz - 1.5Khz

15

FERRITE SERIES



HD SERIES
HY 1822 HD

Power Rating	1500W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4″ In/Out Four Layer
Size/ Net wt.	18'/ 13.5 Kgs
Magnet Size	(220x110x25) /Y35
Frequency	30Hz - 2Khz

18

FERRITE SERIES



HD SERIES
LF18X451-HD

Power Rating	1900W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4.5″ 4 Layer In/ Out
Size/ Net wt.	18'/ 18.9.8 Kgs
Magnet Size	(254x140x30) /Y35
Frequency	35Hz - 1.5Khz

18

FOLLOW US @ /ATIPROTECH

HD SERIES (4 Layer Coil)

FERRITE SERIES



HD SERIES
PD-1850-HD

Power Rating	1999+400W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5" (2+2) 4 Layer In/ Out
Size/ Net wt.	18'/ 18.9 Kgs
Magnet Size	(280x140x30) /Y35
Frequency	35 Hz - 1.5 Khz

FERRITE SERIES



HD SERIES
18TBW300-HD

Power Rating	1600+200W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5" (2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Frequency	35 Hz - 1.5 Khz

FERRITE SERIES



HD SERIES
YX18X451-HD

Power Rating	1800+200W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4.5" (2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Frequency	40 Hz - 2.0 Khz
Magnet Size	250x140x30 /Y35

FERRITE SERIES



HD SERIES
ZX18X451-HD

Power Rating	1800+200W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4.5" (2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Magnet Size	(250x140x30) /Y35
Frequency	30Hz - 2.5Khz

FERRITE SERIES



HD SERIES
YX1850 PLATINUM - HD

Power Rating	1999+400W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5" 4 Layer In/ Out
Size/ Net wt.	18'
Magnet Size	(280x140x30) /Y35
Frequency	35 Hz - 1.5 Khz

FERRITE SERIES



HD SERIES
YX 18 GPA 200 HD

Power Rating	1999
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4" Four Layer In/out
Size/ Net wt.	18'/ 22 Kgs
Magnet Size	(220x110x20) /Y35 **Double Magnet**
Frequency	40 Hz - 2 Khz

FOLLOW US @ /ATIPROTECH

HD SERIES (4 Layer Coil)

FERRITE SERIES



HD SERIES
YXGPA451-HD

Power Rating	1999+200W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	4.5" SV In/ Out
Size/ Net wt.	18'/ 28.6 Kgs
Magnet Size	(253x140x30) /Y35
Frequency	30 Hz - 2 Khz

FERRITE SERIES



HD SERIES
PD-1870-HD

Power Rating	1999+800W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5"(2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Magnet Size	(280X140X25) /Y35 **Double Magnet**
Frequency	30 Hz - 2 Khz

FERRITE SERIES



HD SERIES
PD1880HD

Power Rating	1999+800W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	6" SV (2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Magnet Size	(330x170x30) /Y35
Frequency	35 Hz - 1.5 Khz

FERRITE SERIES



HD SERIES
PD1895HD

Power Rating	1999+1200W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	6" SV (2+2) 4 Layer In/ Out
Size/ Net wt.	18'
Magnet Size	(330x170x25) /Y35
Frequency	45 Hz - 1.5 Khz

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



TX18X451HD

WATER PROOF CONE

HEAT SINK TECHNOLOGY

HIGH STRENGTH CARBON CONE

Power Rating	2000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5" In / Out **(4 Layer)**
Size / Net Wt.	18" / 21 kg
Magnet Size	250x140x30 Y35
Frequency	40Hz - 2KHz

FERRITE SERIES

VoiceEngine audioforce BASSNOTE



TX1850HD®

WATER PROOF CONE

DOUBLE SPIDER RING

Power Rating	1999+400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	5" (2+2) In/Out
Size / Net Wt.	18" / 22 Kg
Magnet Size	(280x140x30) / Y35 **(4 Pcs Magnet)**
Frequency	35 Hz - 1.5 Khz

SUPER PREMIUM MODEL

INDIA'S FIRST 18", 5' VOICE COIL SPEAKER WITH CARBON CONE

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



HD SERIES

PD-2160-HD

Power Rating	3000W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	6″ Layer Voice Coil
Size/ Net wt.	21′/ 31.5 Kgs
Magnet Size	(330x170x30) /Y35
Frequency	30 Hz - 1.5 Khz

FERRITE SERIES



HD SERIES

PD2165 HD

Power Rating	3000W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5.5″ 2+2 In/Out
Size/ Net wt.	21′
Magnet Size	280x140x25 Y35 Dual Layer
Frequency	30Hz - 1.5Khz

FERRITE SERIES



HD SERIES

PD2180HD

Power Rating	4000W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	6″ 2+2 In/Out
Size/ Net wt.	21′
Magnet Size	300x170x25 Y35 Dual Layer
Frequency	30Hz - 1.5Khz

FERRITE SERIES



HD SERIES

PD2190HD

Power Rating	6000W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	7″ 2+2 In/Out
Size/ Net wt.	21′
Magnet Size	(350x170x25) /Y35 Dual Layer
Frequency	30 Hz - 1.5 Khz

Power & Performance Focus - The advanced 4 Layer Voice Coil design ensures deeper bass, higher SPL, and long-lasting durability — making it ideal for high-demand DJ and professional sound setups.

DID YOU KNOW?

ATi pro
ENGINEERED IN ITALY

TITANIUM SERIES



YX1855 - HD
TITANIUM SERIES

25% MORE LOUDNESS TECHNOLOGY

Power Rating	1999+300W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5"
Size/ Net wt.	18'/ 20.5 Kgs
Magnet Size	280x140x25/ Y35
Frequency	37 Hz - 1.5 Khz

18

TITANIUM SERIES



YX1865 - HD
TITANIUM SERIES

TURBO HEAT SINK TECHNOLOGY

25% MORE LOUDNESS TECHNOLOGY

Power Rating	1999+300W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5.5"
Size/ Net wt.	18'/ 24.5 Kgs
Magnet Size	300x170x25/Y35
Frequency	36 Hz - 1.5 Khz

18

TITANIUM SERIES



Yx1875 - HD
TITANIUM SERIES

TURBO HEAT SINK TECHNOLOGY

25% MORE LOUDNESS TECHNOLOGY

Power Rating	1999+850W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	5″ SV (2+2) In/Out
Size/ Net wt.	18'/ 30.5 Kgs
Magnet Size	(280x140x30) /Y35 **Double Magnet**
Frequency	36 Hz - 1.3 Khz

18

TITANIUM SERIES



YX1885 - HD
TITANIUM SERIES

TURBO HEAT SINK TECHNOLOGY

25% MORE LOUDNESS TECHNOLOGY

RMS: 1999+800watts
SIZE: 18″
VOICE COIL: 6″ SV (2+2) 4 Layer In/out
NOMINAL IMPEDANCE: 8 ohms
MAGNET: 330*170*30 Y35
FREQUENCY: 30Hz-2KHz

18

NEWLY LAUNCHED
HD TITANIUM SERIES

India's Best
18"
High Performance Bass Speakers Yet!

NEO DRIVER UNIT

ATIPRO has the largest range of NEO Drivers in India.



DE400

Nominal impedance 8 ohm
Power Capacity 50W
Frequency Range 600Hz-20KHz
Sensitvity 106db/m.w
Diaphragm Material PEN
Voice Coil KCCAR44.4mm (1.75")
Magnet 85x56x5mm
Throat 25mm(1")



DE500

Nominal impedance 8 ohm
Power Capacity 60W
Frequency Range 600Hz-20KHz
Sensitvity 107db/m.w
Diaphragm Material Titanium
Voice Coil KCCAR44.4mm (1.75")
Magnet 102x60x7mm
Throat 25mm(1")



DE800

Power Capacity	220W (Max)
Throat Diameter	36mm (1.4in.)
Mounting Type	Bolt-on
Nominal Impedance	8 Ohm
Power Capacity	110W
Sensitivity (1W/1M)	112dB
Usable Frequency Range	600Hz - 18Khz
Voice Coil Diameter	75mm(3")
Magnet Type	Neodymium



TN880

Power Capacity	220W (Max)
Throat Diameter	36mm (1.4in.)
Mounting Type	Screw on 1-3/8"
Nominal Impedance	8 Ohm
Power Capacity	110W
Sensitivity (1W/1M)	108dB
Usable Frequency Range	600Hz - 20Khz
Voice Coil Diameter	75mm(3")
Magnet	124x80x8mm



ND2545

Nominal impedance 8 ohm
Power Capacity 50W
Frequency Range 1000Hz-20KHz
Sensitvity 107db/m.w
Diaphragm Material Fiber
Voice Coil ALW44.4mm (1.75")
Magnet 80x50x5mm
Throat 25mm(1")



ATI1004ND

Throat	2 Inch
Normal Impedance	8 Ohm
Sensitivity	118 dB
Frequency Range	300-20 Khz
Middle Range (AES)	150 W
High Range (AES)	80 W
Middle Frequency Range	300-7 Khz
High Frequency Range	500-20 Khz
Voice Coil Diameter	3.5/ 1.75 Inch
Voice Coil Material	CCAW in/out
Voice Coil Formaer	Kapton
Diaphragm Material	Polyester
Magnet Type	Neodymium



VRX

Nominal impedance 8 ohm (AC)
Power Capacity 60W
Frequency Range 600KHz-20KHz
Sensitvity 108db/m.w
Diaphragm Material Titanium
Voice Coil KCCAR38.6mm (1.5")
Magnet 70x45x6mm
Throat 25mm(1")



ATI D2 NEO HF

Throat	1.5 Inch
Normal Impedance	16 Ohm
Sensitivity (1W/1m)	112+-2 dB
Frequency Range	1-20 Khz
High Range (AES)	160 W
Voice Coil Diameter	2x3 Inch
Voice Coil Formaer	Kapton
Diaphragm Material	Polyester
Magnet Type	NEO



ATI 150

Power: 120W-150W

Impedance: 8 Ohms/16 Ohms

Freq. Resp.: 180HZ-6KHZ

S.P.L. (1W/1M, 1000HZ): 110dB

Head Cover: Aluminum die-cast

Back Cover Iron

Dimension: 106*62H MM

Neodymium Magnet

Packing: 12pcs/ctn

Carton size: 35*23*17 CM(G.W.:16.5KG)

PA UNIT DRIVER



AT - XT60

Power: 60 W /100 V
Power Taps : 10/20/30/40/60 W
Frequency Response: 160-7,000 HZ
SPL at 1 KHZ : 115dB/1w/1m, 132dB/60W/1m
Dimensions: 150X135 mm
Weight: 2.20 Kg

EXCLUSIVE SERIES FERRITE DRIVERS

Original design & reliable quality.
Exclusive series drivers bears ATIPRO name & Trust.
First time in the world brand name is embossed on HF drives



A450 HF

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 60 watt
Continuous Power Handling 120 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1200-20000 Hz
Voice Coil Diameter 1.75 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 115mm
Cover(or Adaptor) Material Plastic



A518

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 80 watt
Continuous Power Handling 160 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1000-18000 Hz
Voice Coil Diameter 2 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 134mm
Cover(or Adaptor) Material Plastic



A750

Throat 2 inch
Nominal Impedance 8 ohm
Nominal Power Handling 110 watt
Continuous Power Handling 220 watt
Sensitivity(1W/1m) 106 ±2dB
Frequency Range(-10dB max) 600-16000 Hz
Voice Coil Diameter 3 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 170mm
Cover(or Adaptor) Material Aluminium



A800

Throat 2 inch
Nominal Impedance 8 ohm
Nominal Power Handling 110 watt
Continuous Power Handling 220 watt
Sensitivity(1W/1m) 106 ±2dB
Frequency Range(-10dB max) 600-16000 Hz
Voice Coil Diameter 3 inch
Voice Coil Material ALR
Former Material Kapton
Diaphragm Material **Blue Titanium**
Magnet Type Strontium Ferrite
Magnet Sizes 170mm
Cover(or Adaptor) Material Aluminium



ATI850

Throat Diameter- 36 mm
Nominal Impedance- 8 Ohm
Nominal Power- 110 Watts
Sensitivity- 107dB
Voice-Coil Diameter– 74.46 mm
Speaker Weight- 4.5kg



450HD

Throat	1 Inch
Nominal Impedance	8 Ohm
Nominal Power Handling	**70 Watts**
Sensitivity (1W/ 1m)	**140 Watts**
Frequency Range (-10dB max)	110 +- 2dB
Voice Coil Diameter	1200Hz - 20KHz
Voice Coil Material	1.75 Inches
Former Material	CCAW
Diaphragm Material	Kapton
Magnet Type	Titanium
Magnet Size	Strontium Ferrite
Cover (or adaptor) Material	115x15mm
	Plastic



518HD

Throat	1 Inch
Nominal Impedance	8 Ohm
Nominal Power Handling	**90 Watts**
Sensitivity (1W/ 1m)	**180 Watts**
Frequency Range (-10dB max)	110 +- 2dB
Voice Coil Diameter	1000Hz - 20KHz
Voice Coil Material	2 Inches
Former Material	CCAW
Diaphragm Material	Kapton
Magnet Type	Titanium
Magnet Size	Strontium Ferrite
Cover (or adaptor) Material	134x17mm
	Plastic



750HD

Throat	2 Inches
Nominal Impedance	8 Ohm
Nominal Power Handling	**125 Watts**
Sensitivity (1W/ 1m)	**250 Watts**
Frequency Range (-10dB max)	110 +- 2dB
Voice Coil Diameter	700Hz - 18KHz
Voice Coil Material	3 Inches
Former Material	CCAW
Diaphragm Material	Kapton
Magnet Type	Titanium
Magnet Size	Strontium Ferrite
Cover (or adaptor) Material	170x20mm
	Aluminium

ATIPRO ENGINEERED IN ITALY

FERRITE SERIES DRIVER

voice Sugar sound magnet®



D20 NEO HF

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 20 watt
Continuous Power Handling 40 watt
Sensitivity(1W/1m) 105 ±2dB
Frequency Range(-10dB max) 1500-20000 Hz
Voice Coil Diameter 1 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium, Phenolic
Magnet Type Strontium NEO Inside Slug
Magnet Sizes 24mm
Cover(or Adaptor) Material Plastic



D26

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 25 watt
Continuous Power Handling 50 watt
Sensitivity(1W/1m) 106 ±2dB
Frequency Range(-10dB max) 1500-20000 Hz
Voice Coil Diameter 1 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium, Phenolic
Magnet Type Strontium Strontium Ferrite
Magnet Sizes 80mm
Cover(or Adaptor) Material Plastic



350

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 35 watt
Continuous Power Handling 70 watt
Sensitivity(1W/1m) 107 ±2dB
Frequency Range(-10dB max) 1300-20000 Hz
Voice Coil Diameter 1.35 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium, Phenolic
Magnet Type Strontium Strontium Ferrite
Magnet Sizes 90mm
Cover(or Adaptor) Material Plastic

NEW LAUNCH



DE160

Throat 1 Inch
Mounting Type **Bolt-on**
Nominal Impedance 8 Ohm
Max Power 100 watts
RMS Power 50 Watts
Sensitivity @1W/1m 110dB
Usable Frequency Range 1.0 - 20 kHz
Recommended Crossover 2.2 kHz or Higher
12 dB/ oct.min.
Voice Coil Diameter 1.75 Inch
Voice Coil Material CCAR
Voice Coil Former Kapton
Flux Density 1.6T
Magnet Type Strontium Ferrite
Diaphragm Material Polyster

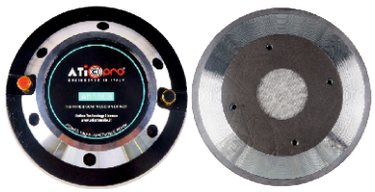

1003

Throat 2 inch
Nominal Impedance 8 ohm
Nominal Power Handling 150 watt
Continuous Power Handling 300 watt
Sensitivity(1W/1m) 105 ±2dB
Frequency Range(-10dB max) 500-12000 Hz
Voice Coil Diameter 4.00 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium, Phenolic
Magnet Type Strontium Strontium Ferrite
Magnet Sizes 190mm
Cover(or Adaptor) Material Aluminium

BETTER THAN ANY GENERIC BRANDS IN THE MARKET

ATIPRO HF have genuine watts + true magnet size.

True TYOKE plates thickness

High quality diaphragm + Superior Packing



Platinum A550

Throat Diameter	1 In.
Voice Coil Diameter	1.75 In
Voice Coil Material	Pure Aluminium Ribbon Wire
Nominal Impedance	8 Ohm
Mounting Type	Blot-on
Frequency Range	1.5Khz - 18Khz
Sensitivity	113dB
Power Capacity	90 Watt RMS
Magnet Type	Strontium Ferrite



D-750 II

Throat Diameter	2 In.
Voice Coil Diameter	3.0 In
Voice Coil Material	CCAW
Nominal Impedance	8 Ohm
Sensitivity	106+/-2dB
Power Capacity	110 Watt RMS
Magnet Type	Ferrite

FOLLOW US @ /ATIPROTECH

PRESSURE MID






A4590

Throat	2 Inch
Normal Impedance	8 Ohm
Sensitivity (1W/1m)	118 +- 2dB
Frequency Range	300-20 Khz
Middle Range (AES)	150 W
High Range (AES)	80 W
Frequency Range (-10dB Max)	300-9 Khz
Voice Coil Diameter	3.5 Inch
Voice Coil Material	CCAW
Voice Coil Former	Kapton
Diaphragm Material	Polyester
Magnet Type	Strontium Ferrite

A4590 MARK 2

Throat	2 Inch
Normal Impedance	8 Ohm
Sensitivity (1W/1m)	118 +- 2dB
Frequency Range	300-20 Khz
Middle Range (AES)	150 W
High Range (AES)	80 W
Frequency Range (-10dB Max)	300-9 Khz
Voice Coil Diameter	3.5 Inch
Voice Coil Material	CCAW
Voice Coil Former	Kapton
Diaphragm Material	Polyester
Magnet Type	Strontium Ferrite

A4592

Throat	2 Inch
Normal Impedance	8 Ohm
Sensitivity	118 dB
Frequency Range	300-20 Khz
Middle Range (AES)	150 W
High Range (AES)	80 W
Middle Frequency Range	300-7 Khz
High Frequency Range	500-20 Khz
Voice Coil Diameter	3.5/ 1.75 Inch
Voice Coil Material	CCAW in/out
Voice Coil Formaer	Kapton
Diaphragm Material	Polyester
Magnet Type	Neodymium

A4594

Throat	2 Inch
Normal Impedance	8 Ohm
Sensitivity	110 dB
Frequency Range	300-20 Khz
Middle Range (AES)	150 W
High Range (AES)	80 W
Middle Frequency Range	300-7 Khz
High Frequency Range	5000-20 Khz
Voice Coil Diameter	3.5/ 1.75 Inch
Voice Coil Material	CCAW
Voice Coil Formaer	Kapton
Diaphragm Material	PEN
Magnet Type	Neodymium







ATI4599 HD

Throat	2 Inch
Normal Impedance	16 Ohm
Sensitivity (1W/1m)	112+-2 dB
Frequency Range	300-20 Khz
Middle Range (AES)	400 W
High Range (AES)	160 W
Frequency Range (-10dB)	700-18 Khz
Voice Coil Diameter	4 Inch
Voice Coil Material	CCAR
Voice Coil Formaer	Kapton
Diaphragm Material	Titanium
Magnet Type	NEO

ATI4699 HD

Throat Diameter: 2 in (50.8 mm)
Mounting Type: 4XM6 Holes 90° on 101.6 mm
Nominal Impedance: 2X16 Ohm
Power Capacity (AES): 675 W(2X337 W Above 300 Hz)
Sensitivity: 2X1W/1m 123 dB
Sensitivity: 200W/1m/35.7 V 135 dB
Frequency Range: 200-8000 Hz
Voice Coil Diameter: 2X4 Inch (2*99.2 mm)
Magnet Material: Neodymium
Voice Coil Material: Copper, Wed Winding, Black
Voice Coil Former: Kapton
Diaphragm Material: Polyester
Net Weight: 4.6 Kg

ATI 4599 Blue Sapphire

Model Name : 4599 HD Blue Sapphire
Throat Diameter : 2 in (50.8 mm)
Mounting Details : 4*M6 Holes
Nominal Impedance : 2×16 Ohms
Power Capacity : 450 Watts
Frequency Range : 200-8000 Hz
Voice Coil Diameter : 2×3.5 inch
Magnet Material : Neodymium
Voice Coil Material : Copper (2 Layer Inside & Outside)
Voice Coil Former : Kapton
Diaphragm Material : Polyster

FOLLOW US @ /ATIPROTECH

IMPORTED NETWORK PLATES

VoiceEngine ®



MODEL - G12 +

Application
450 HF (60 Watts)



MODEL - G15 +

Application
750 HF (110 Watts)



MODEL - ATI-915 +

Application
1x300 - 800 Watts 15" Speakers
1x40 - 100 Watts HF



MODEL - ATI-425 +

Application
2x300 - 500 Watts 15" Speaker
1x40 - 100 Watts HF



MODEL - ATI-825 +

Application
2x600 - 1000 Watts 15" Speaker
1x110 - 150 w HF



MODEL - VRX932

Application
1x300 - 800 Watts Neo 12" Speakers
3x40 - 80 Watts Neo HF

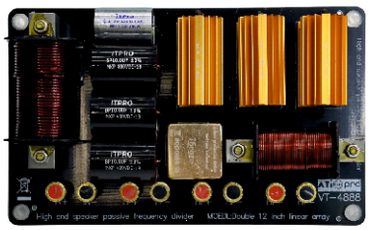

MODEL - VT4888

Application
2x300 - 800 Watts Neo 12"-15" Speakers
2x80 - 110 Watts Neo HF



MODEL - VRX932 (with backplate)

Application
1x300 - 800 Watts Neo 12" Speakers
3x40 - 80 Watts Neo HF

"* All speaker network plates are made using components from Taiwan"

DJ BELTS

- True Length Belts
- Heavy locking system
- True width size
- Made with Italian Technology
- Available In 2x10 Meter, 2x15 Meter (Black & Blue Color)





FOLLOW US @ /ATIPROTECH

INDIAN SERIES NETWORKS

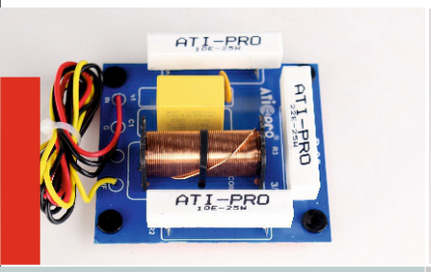

MODEL- D-26

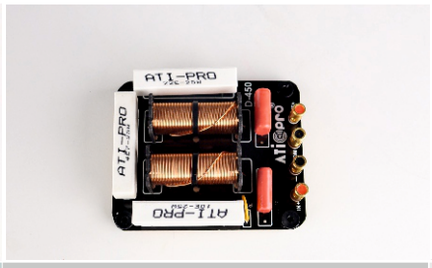

MODEL- D-450



MODEL- 1003

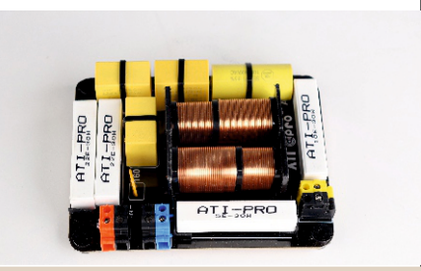

MODEL- A-4594



MODEL- HD-518

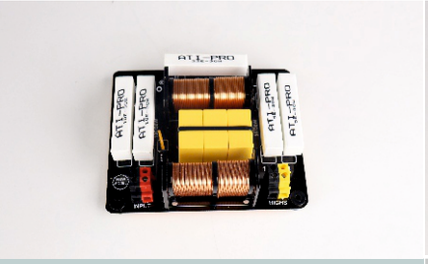

MODEL- A-750



MODEL- HD-750 X2



MODEL- HD-850

NEW RANGE OF
INDIAN SERIES NETWORKS
MADE IN INDIA

Designed with high - grade components, ATI PRO crossover boards provide stable signal flow, reduced distortion, and enhanced sound separation for a cleaner audio experience.

DID YOU KNOW?

ATI pro
ENGINEERED IN ITALY



450



518



750



450-CAP

AtiPro's 100% Original Blue Diaphragm For High Quality

FERRITE DIAPHRAGMS



1003



De160



450 HD



518 HD



518 OG



750 HD



750II CCWR



760 CCWR



2408

100% winding on all diaphragm for high quality sound.

NEO DIAPHRAGMS



1003



1004



A4592



A4594



RECONE KITS



VRX37



4599 BLACK PRESSURE MID DIAPHRAGM



4599 PURPLE PRESSURE MID DIAPHRAGM

For ATI PRO Speakers we have original Recone Kits Available.

FOLLOW US @ /ATIPROTECH

100% winding on all diaphragm for high quality sound.



SP 2.210



SP 4.13



SP 4.1500



SP 4.10



SP 2500



SP 2.300



SP 2800



SP 2650



SP 4650



SP 4800

SP SERIES AUDIOMETAL

	(2 CHANNEL)	(2 CHANNEL)	(2 CHANNEL)	(2 CHANNEL)	(2 CHANNEL)	(4 CHANNEL)	(4 CHANNEL)	(4 CHANNEL)	(4 CHANNEL)	(4 CHANNEL)
Model	**SP2500**	**SP2650**	**SP2800**	**SP2.210**	**SP2.300**	**SP4650**	**SP4800**	**SP4.10**	**SP4.13**	**SP4.1500**
8Ω stereo power	2x500W	2x650W	2x800W	2x2100W	2x3000W	4x650W	4x800W	4x1000W	4x1300W	4x1500W
4Ω stereo power	2x800W	2x1050W	2x1300W	2x3400W	2x4700W	4x1050W	4x1300W	4x1650W	4x2100W	4x2400W
2Ω stereo power	2x1100W	2x1400W	2x1750W	2x4000W	2x5700W					
8Ω Bridge Power	1x1600W	1x2100W	1x2600W	1x6800W	1x9400W	2x2100W	2x2600W	2x3300W	2x4200W	2x4800W
4Ω Bridge Power	1x2200W	1x2800W	1x3500W	1x8000W	1x11400W					
Product Dimensions(WxLxH)	483x251x45MM	483x251x45MM	483x251x45MM	483x308x45MM	483x308x44MM	483x251x45MM	483x251x45MM	483x251x45MM	483x308x45MM	483x403x44MM
Package Dimensions(WxLxH)	530x360x100MM	530x360x100MM	530x360x100MM		523x445x80MM	530x360x100MM	530x360x100MM	530x360x100MM		545x525x80MM
Net Weight	4.2kg	4.4kg	4.6kg	7.3kg	8.3kg	5.5kg	5.8kg	6.5kg	7.2kg	10kg
Gross Weight	5.4kg	5.6kg	5.8kg		9.7kg	6.7kg	7.0kg	7.5kg		11.6kg

FOLLOW US @ /ATIPROTECH



ATI-2000 HD



ATI-3000 HD



ATI-4000 HD



ATI-4.8

Model	2000 HD	3000 HD	4000 HD	4.8
2 ohms AT 1KHz at 1% THD		1250w	2200w	2200w
4 ohms AT 1KHz at 1% THD	900W	800W	1500w	1500w
8 ohms AT 1KHz at 1% THD	600W	500w	900w	
8 ohm Bridge	1800W	1500w	3000w	3000w
4 ohms Bridge		2300w	4400w	4200w
Distortion	<0.1%	<0.02%	<0.02%	
S/N ratio	>95	>95dB	>95dB	
Damping factor	>450	>500	>800	
Freq. response		20Hz-20KHz	20Hz-20KHz	
EIA RACK SPACE 2U DIM.(W X HD)MM	482x88x360	482 x 88 x 480	482 x 88 x 480	
Weight	23KGS	25.5KGS	27 KGS	



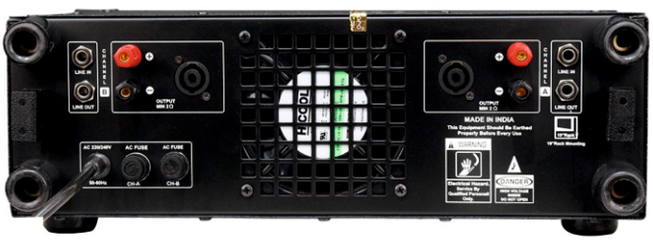

ATI-16X2

POWER OUTPUT 750 + 750 W Max.
OUTPUT REGULATION ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL 200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE 30-20 KHz +-3dB
SPEAKER OUTPUT 2 Ω
POWER SUPPLY AC 220/240 VOLT / 50-60Hz
POWER CONSUMPTION 220 VA

FOLLOW US @ /ATIPROTECH

INDIAN DUAL CHANNEL AMPLIFIERS



ATI-2K2 PRO



ATI-3K2M



ATI-4K2 PRO



ATI-5K2 PRO

MODEL	ATI-2K2 PRO	ATI-3K2M	ATI-4K2 PRO	ATI-5K2 PRO
POWER OUTPUT	2200W Max.	3600W Max.	4200W Max.	5200W Max.
OUTPUT REGULATION	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL	200mV @100KΩ, 1V @10KΩ	200mV @100KΩ, 1V @10KΩ	200mV @100KΩ, 1V @10KΩ	200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE	50-15,000 Hz +-3dB	50-15,000 Hz +-3dB	50-15,000 Hz +-3dB	20-20,000 Hz +-3dB
POWER SUPPLY	AC 220/240 VOLT / 50-60Hz	AC 220/240 VOLT / 50-60Hz	230/240V AC, 50-60Hz	230/240V AC, 50-60Hz
POWER CONSUMPTION	220 VA	220 VA	180 VA	180 VA

ATI GX SERIES DJ AMPLIFIER



ATI GX 3.0



ATI GX 4.0



ATI GX 5.0

MODEL	ATI GX 3.0	ATI GX 4.0	ATI GX 5.0
POWER OUTPUT	2200W Max.	3600W Max.	4200W Max.
OUTPUT REGULATION	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL	200mV @100KΩ, 1V @10KΩ	200mV @100KΩ, 1V @10KΩ	200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE	50-15,000 Hz +-3dB	50-15,000 Hz +-3dB	50-15,000 Hz +-3dB
SPEAKER OUTPUT	2,4Ω	2,4Ω	4,8,16Ω
POWER SUPPLY	AC 220/240 VOLT / 50-60Hz	AC 220/240 VOLT / 50-60Hz	230/240V AC, 50-60Hz 12V DC
POWER CONSUMPTION	220 VA	220 VA	180 VA

FOLLOW US @ /ATIPROTECH





ATI 6+ **ATI 9+**

ATI SERIES AUDIOMETAL

Model	Ati 6+	Ati 9+
8Ω stereo power	600WX2	800WX2
4Ω stereo power	1000Wx2	1200wx2
2Ω stereo powe	1600Wx2	1800wx2
8ΩBridge Mono power	2000w	2400w
4ΩBridge Mono power	3200w	3600w
Frequency response	20HZ-20KHZ	20HZ-20KHZ
Signal noise rate	›80dB	›80dB
THD+N(8OHM 1KHZ IN 1/4 OUTPUT)	‹0.05%	‹0.05%
Damping Factor(8 Ohm 1 K)	›600	›600
Slew Rate	›20V/us	›20V/us
Input Sensitivity	0.775v/1.0v/1.4v	0.775v/1.0v/1.4v
Output topology	Class AB	Class AB
Input connectors(per ch.)	3-pin XLR,electronically balanced	3-pin XLR,electronically balanced
Link connectors(per ch.)	XLR,3 pin male	XLR,3 pin male
Input Impedance	20KΩBALANCED -10KΩUNBALANCED	20KΩBALANCED -10KΩUNBALANCED
Amplifier Protection	Protection of short circuit,open circuit,overheat,overload,DC etc.	Protection of short circuit,open circuit,overheat,overload,DC etc.

- Original design in Germany.
- SMT Circuits for easy repair.
- Four fans technology for Indian conditions.
- ATIPRO reliable, quality and support.
- Easy availability of spares

In order to protect your amplifier from malfunctioning, please ensure proper voltage and frequency while using on Gensets & Direct Electricity Outlet.

FOLLOW US @ /ATIPROTECH



ATI-12+



ATI-18+



ATI-A5000



ATI-20+



ATI-30+



ATI-A7000



ATI-40+

Model	ATi12+	ATi18+	ATi-A5000	Ati20+	ATi30+	ATi-A7000	ATi40+
8Ω stereo power	2x900W	2x1250W	2x1250W	2x1450W	2x1600W	2x1600W	2x1800W
4Ω stereo power	2x1275W	2x1725W	2x1725W	2x2225W	2x3000W	2x3000W	2x3600W
2Ω stereo power	2x1700W	2x2300W	2x2300W	2x2700W	2x3600W	2x3600W	
8Ω Bridge Mono power	2550W	3450W	3450W	4050W	4800W	4800W	4800W
4Ω Bridge Mono power	3400W	4600W	4600W	5400W	6400W	6400W	6400W
Signal Noise Ration(dB)	>80dB						
THD+N（8OHM 1KHZ IN 1/4 OUTPUT)	<0.05%						
Dampin Factor(8OHM 1K)	>1000	>1000	>1500	>1000	>1000	>2000	>2000
Slew Rate	>20V/us						
Input sensitivity	0.775v/1.0v/1.4v						
Output Circuit	Class H	Class H	Class H	Class H	Class H	Class H	Class H
Frequency Response(+/-0.1db)	20Hz-20kHz +-0.5dB						
Input connectors(per ch.)	3-pin XLR,electonically balanced						
Link connectors(per ch.)	XLR, 3 pin male						
Input Impedance	20kΩBALANCED-10kΩUNBALABCED						
Output Connectors	NEUTRIK						
Amplifier Protection	**Protection of short circuit,open circuit,overheat,overload,DC,super sonic frequency etc.**						
Transport Dimension(CM)	3U:67.5x57x19cm						
Net Weight	34kgs	35kgs	35kgs	39kgs	40.5kgs	41kgs	42kgs
Gross Weight	38kgs	39kgs	39kgs	43kgs	45kgs	46kgs	46kgs

FOLLOW US @ /ATIPROTECH



ATI-50+



ATI-60+



ATI-4800+

NEW LAUNCH

MODEL	50+	60+	4800+
8Ω stereo power	2x2100W	2x2300W	1000WX4
4Ω stereo power	2x4200W	2x4600W	1200Wx4
8Ω Bridge Mono power	5200W	5800W	2000w x2
4Ω Bridge Mono power	8800W	9000W	3200w x2
Frequency Response(+/-0.1db)	20Hz-20kHz +-0.5dB	20Hz-20kHz +-0.5dB	20HZ-20KHZ
THD+N（8OHM 1KHZ IN 1/4 OUTPUT)	＜0.08%	＜0.08%	‹0.05%
Slew Rate	＞30V/us	＞30V/us	20V/us
Signal Noise Ration(dB)	＞110dB	＞110dB	80dB
Damping Factor(8OHM 1K)	＞2000	＞2000	›800
Input connectors(per ch.)	3-pin XLR, electronically balanced		
Link connectors(per ch.)	XLR, 3 pin male	XLR, 3 pin male	XLR,3 pin male
Output Circuit	Class H	Class H+++	Class H
Input Impedance	20kΩBALANCED-10kΩUNBALABCED		
Output Socket	Speak on Connectors(NEUTRIK)		
Protection	Protection of short circuit, open circuit, overheat, overload, DC, super sonic frequency etc.		
Power Requirement	200-240v-50-60Hz	200-240v-50-60Hz	200-240v-50-60Hz
Transport Dimension(CM)	69.5X54X24.5	69.5X54X24.5	69.5X54X24.5
Net Weight	44 KGS	48.5KGS	
Gross Weight	49 KGS	52.5KGS	

- Original design in Germany.
- SMT Circuits for easy repair.
- Four fans technology for Indian conditions.
- ATIPRO reliable, quality and support.
- Easy availability of spares

In order to protect your amplifier from malfunctioning, please ensure proper voltage and frequency while using on Gensets & Direct Electricity Outlet.

FOLLOW US @ /ATIPROTECH



ATI 19+



ATI 21+



ATI 31+



ATI 41+



ATI 51+

NEW LAUNCH

MODEL	ATI 19+	ATI 21+	ATI 31+	ATI 41+	ATI 51+
8Ω stereo power	2x1400W	2x1600W	2x1700W	2x2000W	2x2200W
4Ω stereo power	2x2000W	2x2500W	2x3400W	2x4000W	2x4400W
2Ω stereo power	2x2400W	2x3000W			
8Ω Bridge Mono power	4000W	5000W	3400W	4000W	4400W
4Ω Bridge Mono power	4800W	6000W	6800W	8000W	8800W
Signal Noise Ratio(dB)	＞80dB				
THD+N（8OHM 1KHZ IN 1/4 OUTPUT)	＜0.05%				
Damping Factor (8OHM 1K)	＞2000				
Slew Rate	＞20V/us				
Input sensitivity	0.775v/1.0v/1.4v				
Output Circuit	Class H				
Frequency Response(+/-0.1db)	20Hz-20kHz +-0.5dB				
Input connectors (per ch.)	3-pin XLR, electronically balanced				
Link connectors (per ch.)	XLR, 3 pin male				
Input Impedance	20kΩBALANCED-10kΩUNBALABCED				
Output Connectors	NEUTRIK				
Amplifier Protection	Protection of short circuit, open circuit, overheat, overload, DC, super sonic frequency etc.				
Packing	Comes With Heavy Duty Flight Case				
Net Weight	49kgs	51kgs			
Gross Weight	49kgs	51kgs			

FOLLOW US @ /ATIPROTECH





ATI 10000+ (TD CLASS)

ATI 20000 (GB CLASS)

Model	Ati10000+	Ati20000+
8Ω stereo power	2x2500W	2x2800W
4Ω stereo power	2x4500W	2x4200W
2Ω stereo power	2x5000W	
8Ω Bridge Mono power	8000W	0.775v/1v/32dB Switchable
4Ω Bridge Mono power	10000W	< 0.1%@8Ω ,1kHz
Input Delicacy		0.7775v(0dB)
Frequency Response(+/-0.1db)	20Hz-20kHz +-0.5dB	20Hz-20kHz +0.1dB-0.3dB 1w/8Ω
THD+N（**8OHM 1KHZ IN 1/4 OUTPUT**)	< 0.08%	
Slew Rate	> 10 SV/us	
Signal Noise Ration(dB)	> 110dB	
Dampin Factor(8OHM 1K)	> 2000	> 2500
Input connectors(per ch.)	3-pin XLR,electonically balanced	
Link connectors(per ch.)	XLR, 3 pin male	
Output Circuit	Class TD	
Input Impedance	20kΩBALANCED-10kΩUNBALANCED	20kΩBALANCED-10kΩUNBALANCED
Output Socket	Speak on Connectors(NEUTRIK)	
Protection	Protection of short circuit, open circuit, overheat, overload, DC, super sonic frequency etc.	
Power Rquirement	200-240v-50-60Hz	
Transport Dimension(CM)	69.5X54X24.5	
Net Weight	46KGS	
Gross Weight	50KGS	

FOLLOW US @ /ATIPROTECH



TDA - 9000 N



TDA - 15000 N



TDA - 18000 H



TDA - 20000 H

MODEL	TDA 9000 N	TDA 15000 N	TDA 18000 H	TDA 20000 H
8Ω stereo power	2x1900W	2x2200W	2x2300W	2x2500W
4Ω stereo power	2x2850W	2x3300W	2x3400W	2x3650W
2Ω stereo power	2x3800W	2x4400W	2x4600W	2x4800W
8Ω Bridge Mono power	5700W	6600W	6800W	7300W
4Ω Bridge Mono power	7600W	8800W	9200W	9600W
Signal Noise Ratio(dB)	＞101dB			
Crosstalk (1kHz)	＞70dB			
THD+N (20Hz–20kHz)	≤ 0.5% @ 8Ω, 1kHz			
Damping Factor (8OHM 1K)	＞5200 (8Ω, 20Hz–100Hz)			
Output RMS Voltage	43.8dB (0.775V : 120V) / 44.3dB (0.775V : 127V)			
Slew Rate	＞35V/us			
Input sensitivity	0.775v/1.0v/1.4v			
Operating Voltage	110V / 220V, 50/60Hz			
Frequency Response(+/-0.1db)	10Hz-20kHz +-0.35dB			
Input connectors (per ch.)	XLR Active Balanced (Pin 1 GND, Pin 2 +, Pin 3 -)			
Input Impedance	10kΩBALANCED-10kΩUNBALABCED			
Output Connectors	2 × Neutrik NL4 Sockets, 2 × Binding Posts			
Amplifier Protection	Short Circuit, Soft Start, Over Current, Over Heat, DC, Clipping & Limiting, VHF Protection			
Fuse	F-40A			
Idle Power Consumption	＜ 100W			
Max Power Consumption	＜ 5500W			
Circuit Type	Class TD			

ATI pro
ENGINEERED IN ITALY

BL SERIES DJ AMPLIFIER


BL-3500MK3


BL-4500MK3


BL-5500MK3


BL-8000MK3


BL-10000MK3


BL-12000MK3


BL-20000TD


BL-25000TD


BL-3600


BL-4500


BL-5500

BLUE SHARK SERIES NEW LAUNCH BL-SERIES

Models	BL3500MK3 2 Channels	BL4500MK3 2 Channels	BL5500MK3 2 Channels	BL8000MK3 2 Channels	BL10000MK3 2 Channels	BL12000MK3 2 Channels	BL20000TD 2 Channels	BL25000TD 2 Channels	BL3600 4 Channels	BL4500 VER 4.0 4 Channels	BL5500 VER 4.0 4 Channels
Power @ 8 Ohms	2x1000 W	2x1200W	2x1350W	2x1500W	2x1800W	2x2000W	2x2200W	2x2500W	4x800W	4x1000W	4x1200W
Power @ 4 Ohms	2x1600 W	2x2000W	2x2400W	2x2800W	2x3000W	2x3400W	2x3750W	2x4500W	4x1000W	4x1200W	4x1400W
Power @ 2 Ohms	2x2000 W	2x2400W	2x2700W	2x3500W	2x4500W	2x5500W	2x4800W	2x6500W			
Bridged @ 8 Ohms	1x2000 W	1x2400W	1x2700W	1x3000W	1x3600W	1x400W	1x4400W	1x5000W	2x1600W	2x2000W	2x2400W
Bridged @ 4 Ohms	1x3200 W	1x4000W	1x4800W	1x5600W	1x6000W	1x6800W	1x7500W	1x9100W	2x2000W	2x2400W	2x2800W
Frequency Response	10 Hz – 20 KHz										
S/N Rate	>100 dB										
Damping Factor	>3000 (8 Ohms)										
Input Sensitivity	0.775 V, 1V, 1.4V										
Protection	Short-Circuit, DC Overload, Overheat, Ultrasonic, RF, Voltage Peak Limit										
Operating Voltage	110V/220V										
Fuse	F-15A	F-15A	F-20A	F-20A	F-15A	F-15A	-	-	F-10A	F-10A	F-10A
Class	H	H	H	H	H	H	TD	TD	H	H	H
Dimension	483*436*90 mm (2 U)	483*436*90 mm (2 U)	483*436*90 mm (2 U)	483*555*144 mm (3 U)	483*555*144 mm (3 U)	483*555*144 mm (3 U)			483*436*90 mm (2 U)	483*436*90 mm (2 U)	483*436*90 mm (2 U)
Net Weight	21 KG	22.5 KG	25.5 KG								
Gross Weight	23 KG	24.5 KG	27.5 KG								

Characterise

- Combines with 3 degree class H high efficient circuit, supply upto 8 Ohms 2x1700w (4 Ohms 2x3300W; 2 Ohms 3x5500W) strong power
- Perfect circuit protection design, equip with over-heat protection pressure limit protection, over currect protection, over-load protection.
- Combine with 12 (1800uf) capacitance of high effective and high quality. The low frequency less than 20Hz.
- No fake powers
- High quality
- Designed to perform under Indian conditions

India's Most Premium And Affordable Amplifier With Excellent Power Output

FOLLOW US @ /ATIPROTECH





AT 4000 (CLASS D)

AT SERIES (CLASS D) AMPLIFIER

Model	AT4000
8Ω streo power	2x1500W
4Ω streo power	2x2500W
Input sensitivity	0.775v/1v/32dB Switchable
THD	＜ 0.1%@8Ω ,1kHz
IMD	＜ 0.5%@8Ω ,60Hz-7kHz4:1
Frequency Response	20Hz-20kHz ±2dB
Cooling	Dual Cooling Fan Controlled by Temperature
S/N ratio(@8Ω,1kHz,32dB,A weighting)	＞ 105dB
Rated Consumption Current @1% maximum (power) output,4Ω	6A
Rated power supply	220v-50Hz
Dampin Factor(8OHM 1K)	＞ 500@8Ω,100Hz
Temperature	Working Temperature -10℃-40℃, storage Temperature -25℃-80℃
Input connectors	2xXLR
Link connectors	2xXLR
Output connectors	2xNl4
Output Circuit	Class D
Input Impedance	20kΩBALANCED-10kΩUNBALANCED
Output Socket	Speak on Connectors(NEUTRIK)
Dimension	89mm x482mm x279mm
Net Weight	16.4KGS
Gross Weight	19.8KGS

ATI FALCON 6

AMPLIFIER

Model	ATI FALCON 6
8Ω streo power	2 × 1550 Watts
4Ω streo power	2 × 2400 Watts
2Ω streo power	2 × 3100 Watts
4Ω bridge power	6200 Watts
Amplifier Class	Class H Circuit
2 Ohm Stable	Yes
Frequency Response	20 Hz – 20 kHz (±0.5 dB)
Signal to Noise Ratio	More than 105 dB
Damping Factor	More than 700
Crossover Filters Low Pass	20 Hz – 500 Hz (12 dB/Oct)
Crossover FiltersHigh Pass	20 Hz – 500 Hz (12 dB/Oct)
Speaker Output Connectors	Speakon & Binding Post
Output Circuit Protection	DC / Soft Start Protection
Cooling	Intelligent Variable Speed Fans
Airflow	Front to Rear
DC Protection	Yes
Thermal Protection	Yes
Clip Limiter	Yes
AC Voltage Protection	Yes
Soft Start Protection	Yes
Power Supply Type	High Efficiency Toroidal Transformer
Operating Voltage	220 – 240V AC, 50 Hz

ATi pro®
ENGINEERED IN ITALY

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-60U HD+

POWER OUTPUT : 85W Max.
2U Rack Mounting
INPUT CHANNEL :3 mic & 2 Output
SPEAKER OUTPUT : 4Ω, 8Ω, 70V, 100V
POWER SUPPLY : 220/240V AC ,50-60Hz 24V DC
POWER CONSUMPTION : 220 VA

INSTALLATION 2 CHANNEL

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-100U HD+

POWER OUTPUT : 150W Max.
19" Rack Mounting
INPUT CHANNEL :3 mic & 2 Output
SPEAKER OUTPUT : 4Ω, 8Ω, 70V, 100V
POWER SUPPLY : 220/240V AC ,50-60Hz 24V DC
POWER CONSUMPTION : 220 VA

INSTALLATION 2 CHANNEL

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-300U HD+

POWER OUTPUT : 320W RMS (360 Max)
INPUT CHANNEL : 6 x mic, 3 AUX, 1 Line-in
FREQ RESPONSE : 55Hz - 14.8 Khz
SPEAKER OUTPUT : 4,8Ω 70,100V
POWER SUPPLY : 230V AC ,50Hz 24V DC
S/N Ratio: 65dB
WEIGHT : 18KG

HIGH WATTAGE

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-500U HD+

POWER OUTPUT : 520W RMS (650 Max)
INPUT CHANNEL : 6 x mic, 3 AUX, 1 Line-in
FREQ RESPONSE : 55Hz - 15 Khz
SPEAKER OUTPUT : 2,4Ω 70,100V
POWER SUPPLY : 230V AC ,50Hz 24V DC
S/N Ratio: 62dB
WEIGHT : 19.5KG

HIGH WATTAGE

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-750 HD+

POWER OUTPUT : 750W RMS (1110W Max)
OUTPUT : 200mV PRE OUT 1 LINE OUT
INPUT CHANNEL : 1 MIC, 2 AUX, 1 LINE IN
FREQ RESPONSE : 55 HZ – 15 KHZ
SPEAKER OUTPUT : 2Ω, 4Ω, 70V, 100V
POWER SUPPLY : AC 230V/50Hz
WEIGHT : 26KGs

HIGH WATTAGE

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-750U HD+

POWER OUTPUT : 750W RMS (1110W Max)
OUTPUT : 200mV PRE OUT 1 LINE OUT
INPUT CHANNEL : 1 MIC, 2 AUX, 1 LINE IN
FREQ RESPONSE : 55 HZ – 15 KHZ
SPEAKER OUTPUT : 2Ω, 4Ω, 70V, 100V
POWER SUPPLY : AC 230V/50Hz
WEIGHT : 26KGs

HIGH WATTAGE

INDIA's MOST POWERFUL PA AMPLIFIER

FOLLOW US @ /ATIPROTECH

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

ATI-1250 HD+

POWER OUTPUT : 1250W RM (1700W MAX)
OUTPUT: 200mV PRE OUT 1V LINE OUT
INPUT CHANNEL : 1 MIC, 2 AUX, 1 LINE IN
FREQ RESPONSE : 55 HZ – 15 KHZ
SPEAKER OUTPUT : 2Ω, 4Ω, 70V, 100V
POWER SUPPLY : AC 230V/50Hz
WEIGHT : 31 Kgs
*** 1250 COMES WITHOUT USB**

HIGH WATTAGE

PA SERIES DJ AMPLIFIER

TOROIDAL TRANSFORMER



AUDIOMETAL

1250U HD+

POWER OUTPUT : 1250W RM (1700W MAX)
OUTPUT: 200mV PRE OUT 1V LINE OUT
INPUT CHANNEL : 1 MIC, 2 AUX, 1 LINE IN
FREQ RESPONSE : 55 HZ – 15 KHZ
SPEAKER OUTPUT : 2Ω, 4Ω, 70V, 100V
POWER SUPPLY : AC 230V/50Hz
WEIGHT : 31 Kgs
*** 1250 COMES WITHOUT USB**

HIGH WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-300 FX

POWER OUTPUT : 300W Max
INPUT CHANNEL : 6 X MIC 0.65Mv/4.7 Kohms
2 X AUX 100MV/470 Kohms
FREQ RESPONSE : 100-15000HZ +-3DB
SIGNAL TO NOISE RATIO: 60 DB
USB : BT/MP3
SPEAKER OUTPUT : 4/8 OHMS & 70/100V
OUTPUT REGULATION : LESS THAN 2DB @ 1KHZ
POWER SUPPLY : AC: 220V - 240V @ 50/60Hz, DC - 24V

HIGH WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-350 FX

POWER OUTPUT : 350W Max
INPUT CHANNEL : 6 X MIC 0.65Mv/4.7 Kohms
2 X AUX 100MV/470 Kohms
FREQ RESPONSE : 100-15000HZ +-3DB
SIGNAL TO NOISE RATIO: 60 DB
USB : BT/MP3
SPEAKER OUTPUT : 4/8 OHMS & 70/100V
OUTPUT REGULATION : LESS THAN 2DB @ 1KHZ
POWER SUPPLY : AC: 220V - 240V @ 50/60Hz, DC - 24V

HIGH WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-400 FX

POWER OUTPUT : 400W Max
INPUT CHANNEL : 6 X MIC 0.65Mv/4.7 Kohms
2 X AUX 100MV/470 Kohms
FREQ RESPONSE : 100-15000HZ +-3DB
SIGNAL TO NOISE RATIO: 60 DB
USB : BT/MP3
SPEAKER OUTPUT : 4/8 OHMS & 70/100V
OUTPUT REGULATION : LESS THAN 2DB @ 1KHZ
POWER SUPPLY : AC: 220V - 240V @ 50/60Hz, DC - 24V

HIGH WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI PRO-350

POWER OUTPUT : 400W
INPUT CHANNEL : 6 x mic, 2 AUX, 1 Line-in
FREQ RESPONSE : 50Hz - 15 Khz
SPEAKER OUTPUT : 4,8Ω 70,100V
POWER SUPPLY : 220V-240 AC ,50/60Hz 12V DC
S/N Ratio: 60dB

HIGH WATTAGE

FOLLOW US @ /ATIPROTECH

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-601

POWER OUTPUT : 650W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
WEIGHT : 23KG

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-650 USB

POWER OUTPUT : 650W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
WEIGHT : 23KG

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-707

POWER OUTPUT : 800W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ
FREQ RESPONSE : 100-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1001

POWER OUTPUT : 1000W Max.
OUTPUT REGULATION : ≤ 2 dB @ 1kHz
INPUT CHANNEL : 200mV @100KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA

INSTALLATION 2 CHANNEL

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1201

POWER OUTPUT : 1200W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
PROTECTION DETAILS : Fuse Protection, Thermal Protection
Circuit Breaker, Relay Protection

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1202

POWER OUTPUT : 1200W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
PROTECTION DETAILS : Fuse Protection, Thermal Protection
Circuit Breaker, Relay Protection

BOOSTER

FOLLOW US @ /ATIPROTECH

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1212 ULTRA

POWER OUTPUT : 1200W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
PROTECTION DETAILS : Fuse Protection, Thermal Protection
Circuit Breaker, Relay Protection

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1601 PLATINUM

POWER OUTPUT : 1600W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT : AUX IN, LINE IN
FREQ RESPONSE : 20 Hz-20 Khz
OUTPUT : SPEAKON, BINDING POST
DAMPING FACTOR : >300
POWER CONSUMPTION : 220 VA

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-1616 ULTRA

POWER OUTPUT : 1600W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 200mV @100KΩ, 1V @10KΩ
FREQ RESPONSE : 50-15,000 Hz +-3dB
SPEAKER OUTPUT : 2,4Ω/ 70,100V
POWER SUPPLY : AC 220-240 VOLT/50-60Hz
POWER CONSUMPTION : 220 VA
PROTECTION DETAILS : Fuse Protection, Thermal Protection
Circuit Breaker, Relay Protection

BOOSTER

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-45

POWER OUTPUT : 45W Max, 40W RMS @ 10% THD
INPUT CHANNEL : 2 X MIC 0.65Mv/4.7 Kohms
1 X AUX 100MV/470 Kohms
FREQ RESPONSE : 100-15000HZ +-3DB
SIGNAL TO NOISE RATIO: 60 DB
USB : BT/MP3
SPEAKER OUTPUT : 4/8/16 OHMS & 100V
POWER SUPPLY : DC - 12V

MEDIUM WATTAGE

INDIA'S FIRST 18", 5' VOICE COIL SPEAKER WITH CARBON CONE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-65

POWER OUTPUT : 65W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 3 x mic 0.65mV/4.7Ω
1 x Aux 100mV/470 kΩ
FREQ RESPONSE : 100-15,000 Hz +-3dB
SPEAKER OUTPUT : 4,8,16Ω 70,100V
POWER SUPPLY : 220/240V AC ,50-60Hz 12V DC
POWER CONSUMPTION : 80 VA
WEIGHT : 7KG

MEDIUM WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-85

POWER OUTPUT : 85W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kH
INPUT CHANNEL : 4 x mic 0.65mV/4.7Ω
1 x Aux 100mV/470 kΩ
FREQ RESPONSE : 100-15,000 Hz +-3dB
SPEAKER OUTPUT : 4,8,16Ω 70,100V
POWER SUPPLY : 220/240V AC ,50-60Hz 12V DC
POWER CONSUMPTION : 100 VA
WEIGHT : 8.8KG

MEDIUM WATTAGE

FOLLOW US @ /ATIPROTECH

ATI pro®
ENGINEERED IN ITALY

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-125 ECO

POWER OUTPUT : 125W Max
INPUT CHANNEL : 5 X MIC 0.65Mv/4.7 Kohms
2 X AUX 100MV/470 Kohms
FREQ RESPONSE : 100-15000HZ +-3DB
SIGNAL TO NOISE RATIO: 60 DB
USB : BT/MP3
SPEAKER OUTPUT : 4/8 OHMS & 70/100V
OUTPUT REGULATION : LESS THAN 2DB @ 1KHZ
POWER SUPPLY : AC: 220V - 240V @ 50/60Hz, DC - 24V

MEDIUM WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-150

POWER OUTPUT : 150W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 5 x mic 0.65mV/4.7Ω
2 x Aux 100mV/470 kΩ
FREQ RESPONSE : 100-15,000 Hz +-3dB
SPEAKER OUTPUT : 4,8,16Ω 70,100V
POWER SUPPLY : 220/240V AC ,50-60Hz 12V DC
POWER CONSUMPTION : 180 VA
WEIGHT : 11.3KG

MEDIUM WATTAGE

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATI-200

POWER OUTPUT : 200W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL : 6 x mic 0.65mV/4.7Ω
2 x Aux 100mV/470 kΩ
FREQ RESPONSE : 100-15,000 Hz +-3dB
SPEAKER OUTPUT : 4,8,16Ω 70,100V
POWER SUPPLY : 220/240V AC ,50-60Hz 24V DC
POWER CONSUMPTION : 220 VA
WEIGHT : 13KG

MEDIUM WATTAGE

ATI PRO offers one of the widest ranges of PA Amplifiers in India — from medium-wattage and booster amplifiers to 2-zone, installation, and high-wattage models, delivering the perfect solution for every sound setup.

DID YOU KNOW?

PA SERIES DJ AMPLIFIER



AUDIOMETAL

ATZA-300U HD+

DUAL CHANNEL MIXER AMPLIFIER
6 MIC & 2 AUX INPUT
OUTPUT POWER – 150 + 150 WATTS
MAX POWER – 200 WATT PER CHANNEL
CONNECTIVITY – MP3 PLAYER, SD CARD READER, FM & BLUETOOTH
FREQENCY RESPONSE – 50HZ – 15KHZ
BASS, MID, TREBLE CONTROL

2 ZONE AMPLIFIER



ATZA-5000BTE

DUAL CHANNEL MIXER AMPLIFIER
6 MIC & 2 AUX INPUT
OUTPUT POWER – 250 + 250 WATTS
MAX POWER – 300 WATT PER CHANNEL
CONNECTIVITY – MP3 PLAYER, SD CARD READER, FM & BLUETOOTH
FREQENCY RESPONSE – 50HZ – 15KHZ
BASS, MID, TREBLE CONTROL

2 ZONE AMPLIFIER



AZA-10000

TWO ZONE AMPLIFIER
OUTPUT POWER – 500 + 500 WATTS
MAX POWER – 750 WATT PER CHANNEL
FREQENCY RESPONSE – 15HZ – 15KHZ
BASS, MID, TREBLE CONTROL

2 ZONE AMPLIFIER

Did you know the ATI PRO Two Zone PA Amplifier lets you control and distribute audio independently across two different zones, making it perfect for schools, temples, offices, malls, and large commercial installations—all from a single amplifier!

DID YOU KNOW?

DJ AMPLIFIER



AT-801

2 ΩEIA 1kHz 1% THD – 1600 W
4 ΩEIA 1kHz 1% THD – 1200 W
8 ΩEIA 1kHz 1%THD – 800 W
8 Ω Bridge Mono – 2200 W
4 Ω Bridge Mono – 2900 W
Distortion (SMPTE-1M) – <0.01%
S/N Ratio – 103 DB
Damping Factor – >800
Frequency Response – 20 Hz – 20 Khz
Class – H
EIA Rack Space – 3
Dim.(WXHXD) Mm – 482 X 132 X 483
Weight (In Kgs) – 34

DJ AMPLIFIER



AT-1201

2 ΩEIA 1kHz 1% THD – 2500 W
4 ΩEIA 1kHz 1% THD – 1850 W
8 ΩEIA 1kHz 1%THD – 1350 W
8 Ω Bridge Mono – 3700 W
4 Ω Bridge Mono – 4800 W
Distortion (SMPTE-1M) – <0.01%
S/N Ratio – 103 DB
Damping Factor – >800
Frequency Response – 20 Hz – 20 Khz
Class – H
EIA Rack Space – 3
Dim.(WXHXD) Mm – 482 X 132 X 483
Weight (In Kgs) – 41

DJ AMPLIFIER



AT-1601

2 ΩEIA 1kHz 1% THD- 3000 W
4 ΩEIA 1kHz 1% THD- 2250 W
8 ΩEIA 1kHz 1%THD- 1700 W
8 Ω Bridge Mono- 4200 W
4 Ω Bridge Mono- 5200 W
Distortion (SMPTE-1M) <0.01%
S/N Ratio 103 D
BDamping Factor >1000
Frequency Response 20 Hz – 20 Khz
Class HEIA Rack Space 3
Dim.(WXHXD) Mm 482 X 132 X 483
Weight (In Kgs) 47

AUDIOCENTER

A High-quality Oem product manufactured by one of the worlds largest amplifier company, Audio Center



ATI-20

DISTRIBUTION AMPLIFIER

- Left & Right Gain Controller
- Power Switch Button
- Multiple Input Output Slots
- Power Supply : AC 220 V 50 HZ
- Can easily control 10 Stereo or Mono Amplifiers



ATI-1048

DISTRIBUTION AMPLIFIER

- Left & Right Gain Controller
- Power Switch Button
- Multiple Input Output Slots
- Power Supply : AC 220 V 50 HZ
- Can easily control 10 Stereo or Mono Amplifiers



DAX 20

DISTRIBUTION AMPLIFIER

Product Type : Professional Audio Signal Distributor
Frequency Response : 10Hz – 35kHz
Total Harmonic Distortion (THD) : 0.004% @ 1kHz
Noise Floor : >92dB
Crosstalk : < -85dB
Input Connectors : Balanced XLR & ¼" TRS
Input Impedance : 20K Ohms
Maximum Input Level : +21 dB
Output Connectors : Balanced XLR
Output Impedance : 60 Ohms
Maximum Output Level : +21 dB
Function Switch : Mono / Stereo
Input Controls : Left & Right Input Attenuator
Rack Size : Standard 19-Inch Rack Mount
Power Supply : AC 230V, 50/60Hz
Power Consumption : 10W Max
Weight : 3.4 kg



R-15+

ACTIVE MONITOR

ATIPRO R15+ 2 Way Active Speaker with DSP Technology
MAX POWER- 1100 WATT
SIZE- 15 Inch
Nominal Impedance- 8 Ohms
Voice Coil – 3.5 Inch
Gross Weight – 25.9 KG
Frequency – 45HZ- 20KHZ
Sensitivity- 97DB4
USES MODES
- **LIVE Mode**
- **DJ Mode**
- **Speech**
- **Music Mode**

Multi Inputs
Bluetooth Connectivity
2 Way Multipurpose System



ATI CUBE-35

PORTABLE SPEAKER

Model : ATI CUBE-35
Speaker Size : 8 Inch
Output Power : 40 Watts
Wireless Mic : 1 Cordless Microphone Included
Microphone Inputs : 3 Mic Inputs
Guitar Input : 1 Input
Line Input : 1 Input
Connectivity : Bluetooth, USB, Micro SD, FM Radio
Audio Controls : Bass, Treble, Echo Depth, Echo Time
Battery : Built-in Rechargeable Battery
Battery Indicator : 25%, 50%, 90%, 100% LED Indicators
Power Supply : AC 220-240V / Battery Operated
Country of Origin : Made in India



EQUALIZER 231

- Dual 31-band, 1/3-octave Constant Q frequency bands
- Switchable boost/cut ranges of ±6 or ±12 dB
- Front panel bypass switch
- ±12 dB input gain range
- 4-segment LED ladders for monitoring output levels
- XLR and TRS Inpts and Outputs
- Frequency Response of <10Hz to >50kHz
- Dynamic range of greater than 108dB



ATI 1215
EQUALIZER



SC203 (3 Way Crossover)
BASS CROSSOVER



234XL (2/3/4 Way Crossover)
BASS CROSSOVER



3.1F
BASS CROSSOVER



ATi Rev100
EQUALIZER



3.2F
BASS CROSSOVER



260
DIGITAL CROSSOVER

FOLLOW US @ /ATIPROTECH

SOUND PROCESSOR



MIDIVERB 4



DSP4X8SM



ATI 6.0 FBX

FOLLOW US @ /ATIPROTECH

WIRED MICS

All ATIpro mics comes with high quality materials for durability & carry pouch.


BETA 58C


BETA 58


ATI 77


ATI 78


D5


ATI 600


ATI M8

GOOSENECK MICROPHONE



AT21-GM

Capsule Type - Condenser
Polar Pattern Ultra - Cardioid
Reference Pickup Distance - 50cm
Gooseneck Length - 21 Inch
Cable Length 6m Dual - Core Cable
Power - Type C 12V DC 2x1.5V Batteries
Indicator Light - Built-in Status Lamp

IMPORTED MIC STANDS

ATI DGN BMS2



ATI DGN BIG



ATI DGN SMALL



WIRELESS MICS

ALL MICS COMES WITH INBOX FLIGHT CASES



ATI-408A



ATI-408B



ATI-408C



ATI-2K



ATI A1

PINS AND CONNECTORS

SPEAKON MALE



A302
(4 PIN SPEAKON)



A304
(4 PIN SPEAKON)



A302W
(4 PIN SPEAKON)
(WATERPROOF)



A306
(4 PIN SPEAKON)
(METAL)



A320
(8 PIN SPEAKON)

SPEAKON FEMALE



A312G
(4 PIN SOCKET)



A326
(4 PIN SOCKET)
(METAL)



A311M
(4 PIN SOCKET ROUND)
(METAL)



A322
(8 PIN SOCKET ROUND)



A316M8
(8 PIN SOCKET)
(METAL)

XLR MALE



AX01
(3 PIN XLR)
(ATI PRO MOLD)



AX01B
(3 PIN XLR BLACK)
(ATI PRO MOLD)



A905
(3 PIN XLR)



A905BG-2
(3 PIN XLR BLACK)

XLR FEMALE



AX02
(3 PIN XLR)
(ATI PRO MOLD)



AX02B
(3 PIN XLR BLACK)
(ATI PRO MOLD)



A906
(3 PIN XLR)



A906BG-2
(3 PIN XLR BLACK)

PINS AND CONNECTORS

P-38 PIN



A801
(6.35MM MONO PIN)



A810
(6.35MM MONO PIN)



A810BG
(6.35MM MONO PIN)



A803G
(6.35MM MONO PIN)



A802
(6.35MM STEREO PIN)

ST & RC PIN



A823BG
(3.5MM STEREO PIN)



A823LBG
(3.5MM STEREO PIN)



A601
(RC PIN)



A605
(RC PIN)

POWERCON



A701A
(POWERCON MALE)



A702A
(POWERCON FEMALE)



A703A
(POWERCON MALE)



A704A
(POWERCON FEMALE)

PANELMOUNT



A907
(PANELMOUNT XLR MALE)



A907BG
(PANELMOUNT XLR MALE)



A908
(PANELMOUNT XLR FEMALE)



A908BG
(PANELMOUNT XLR FEMALE)

CONNECTING WIRES

CONNECTING WIRES



A002
(XLR M & F)
(AVL SIZE: 1.5 / 5 / 10 / 15 MTR)



A003
(2*XLR M & 1*XLR F)
(AVL SIZE: 2 MTR)



A640
(2*XLR M & 1*XLR F)
(AVL SIZE: 1.5 MTR)
(ATI PRO MOLD)



A006L
(1*XLR M & 6*XLR F)
(AVL SIZE: 2 / 3 MTR)



A008L
(1*XLR M & 8*XLR F)
(AVL SIZE: 2 MTR)

CONNECTING WIRES



ARC013
(2*RCA & 1*3.5 ST)
(AVL SIZE: 2 MTR)



A601W
(2*RCA & 1*3.5 ST)
(AVL SIZE: 1.5 MTR)



A611
(2*6.35 & 1*3.5 ST)
(AVL SIZE: 1.5 MTR)



A621
(2*XLR M & 1*3.5 ST)
(AVL SIZE: 1.5 MTR)

CONNECTING WIRES



A640
(2*XLR M & 1*XLR F)
(AVL SIZE: 1.5 MTR)



A641
(3.5 MM TO 3.5 MM)
(AVL SIZE: 1.5 MTR)



A701AW
(2*RCA & 1*TYPE C)
(AVL SIZE: 2 MTR)



A711A
(2*6.35 MM & 1*TYPE C)
(AVL SIZE: 2 MTR)

CONNECTING WIRES



A721A
(2*XLR M & 1*TYPE C)
(AVL SIZE: 2 MTR)



A722A
(3.5 MM & TYPE C)
(AVL SIZE: 2 MTR)



A20078
(HDMI CABLE 4K / OFC)
(AVL SIZE: 3 / 5 / 10 MTR)

WIRES



A102N

Model Name- A 102 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - TWO
SIZE - 1 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



A103N

Model Name- A 103 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - TWO
SIZE - 1.5 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



A104N

Model Name- A 104 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - TWO
SIZE - 2 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



A105N

Model Name- A 105 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - TWO
SIZE - 2.5 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



A107N

Model Name - A 107 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - FOUR
SIZE - 1 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



A110N

Model Name - A 110 N
TYPE - SPEAKER CABLE
NUMBER OF CORE - SIX
SIZE - 1 SQ MM
Length - 91 mtr
100% Copper.
True audiophile performance for accurate sound transmission with crystal clear response.
Insulated With Cotton & Paper.
Fully Imported.



AM004

Model Name - AM004
96 Spiral
SIZE - 32*2*0.1 sq mm
Length – 91 mtr
100% Copper.
High-Quality Signal Transmission For Exceptional Audio Quality In Microphone And XLR Cables.
Insulated With Cotton & Paper.
Fully Imported.



AM006

Model Name - AM006
64 Spiral
SIZE - 18*2*0.1 sq mm
Length – 91 mtr
100% Copper.
High-Quality Signal Transmission For Exceptional Audio Quality In Microphone And XLR Cables.
Insulated With Cotton & Paper.
Fully Imported.

LINE ARRAY SYSTEMS HDL SERIES

WITH PHASEGUIDE TECHNOLOGY



HDL2010 2 WAY

- 2x80 Watts Polymer Diaphragm Neodymium Compressor Driver.
- 2x10" High Efficiency 500 Watts Neodymium Speaker.
- Enclosure constructed of high quality plywood with rugged durable finish
- Precision crossover for optimal driver integration
- Italian technology





HDL212 12 2 WAY

- 2x12 High Efficiency 600 watts Neodymium speaker.
- 2x110 watts polymer diaphragm Neodymium compression driver
- Enclosure constructed of high quality plywood with rugged durable finish
- Precision crossover for optimal driver integration

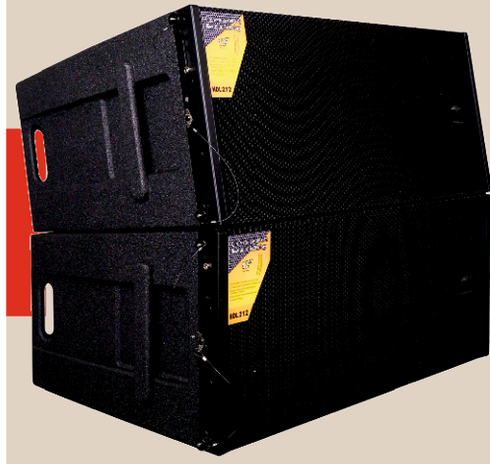

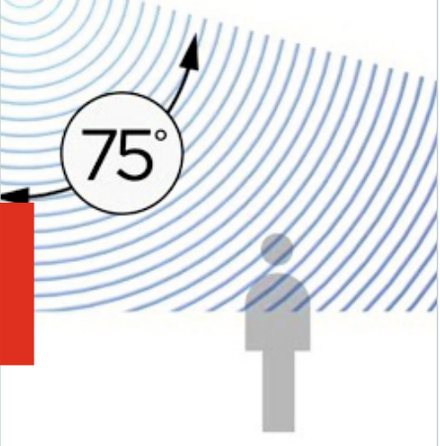

Controls the direction of sound and projects sound out with 75 degrees of asymmetrical vertical coverage and wide horizontal coverage.

World's First Line Array Systems with PhaseGuide Technology

VoiceEngine® voice Sugar™

LINE ARRAY SYSTEMS HDL SERIES



HDL312 3 WAY

- 1*12” *(300mm) / 3” voice coil NEO LF Driver.
- 3*3” *(83mm) / 0.6” voice coil NEO MF Driver.
- 3*1” *(25mm) / 1.7” voice coil NEO HF Driver.
- Enclosure constructed of high quality plywood with rugged durable finish
- Precision crossover for optimal driver integration
- Italian Technology



India’s Most Powerful 3 Way Line Array System



VRX 932

- VRX 932 – 2 Way Line Array System
- 12” Neodymium Speaker
- 600 Watts RMS Power
- Made out of 100% Birch Plywood
- Precision Crossover for Optimal Driver Integration
- 3X60 Watts Neo HF Drivers

All our cabinets are made from birch wood, it offers quality & reliability.

ATIPRO LOADED CABINETS

ATIPRO Single 12 Inch Mini DJ System

ARX 250

POWER RATING – 400 WATTS RMS / 800 WATTS PROGRAMME
CONFIGURATION – 2 WAY
FREQUENCY RESPONSE – 55Hz-20 KHZ
LOW FREQUENCY SPEAKER – 2 * 12 INCH (2.0 INCH VOICE COIL / 155 MM MAGNET)
HIGH FREQUENCY – 1 PIEZO HORN TWEETER
NOMINAL IMPEDANCE – 8 OHMS
Size – 12 Inch
INPUT CONNCETORS – TERMINAL STRIP



INDIAN

ATIPRO Dual 12 Inch Mini DJ System

ARX 500

Input Power: 200W RMS
Freq.-Response: 55Hz-20 Khz
Nominal Impedance: 8 Ohms
Input Connectors: 6.35mm Phone Jack + Terminal Strip
Max. Rated Spl.: 123dB

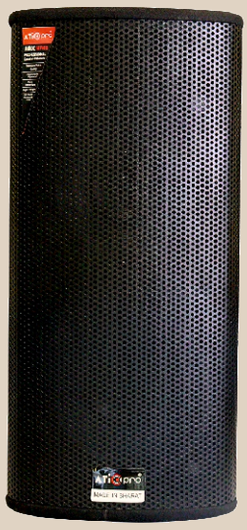

INDIAN

ATI 915

Speaker Type: 2 Way Passive
LF: 15”x1 -(650W)
HF: 3”x1 - (120W)
Rated Power: 800W RMS
Impedance: 8Ohms

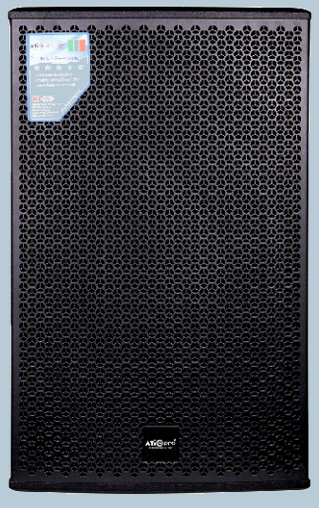

IMPORTED

ATI 725

Speaker Type: 3 Way Passive
LF: 15”x2 -(650W)
HF: 3”x1 - (120W)
Rated Power: 1300W RMS
Impedance: 4Ohms



IMPORTED

ATI 218

Speaker Type: SUB
LF: 18”x2
Rated Power: 4000W RMS
Impedance: 4Ohms

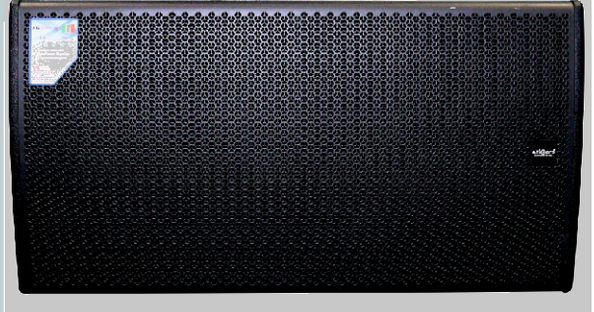

IMPORTED

INDIA'S MOST PREMIUM QUALITY LOADED CABINETS

LINE RAY & SPECIAL BASE CABINETS



INDOOR LINE RAY



VRX 932

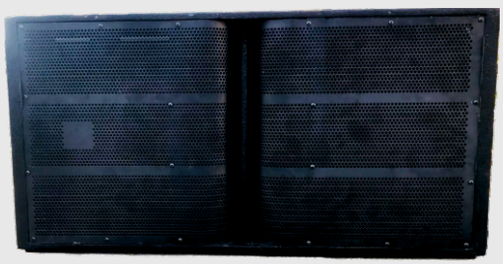

LF-8



LF-7



ATI 4888

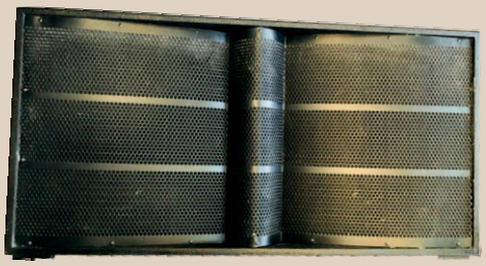

LF-9

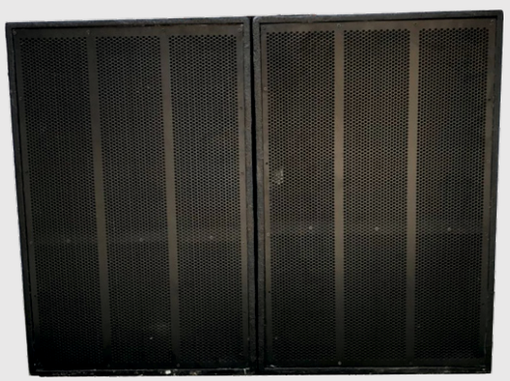

HOG SCOOP

"All Both empty & complete cabinets available"

All our cabinets are made from birch wood, it offers quality & reliability.

CABINETS

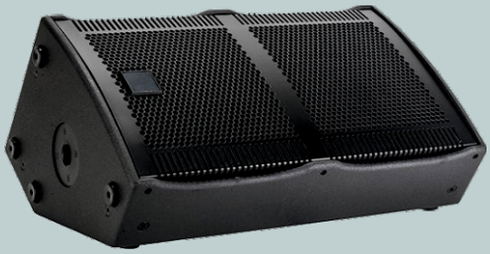

V35



M22



915



828

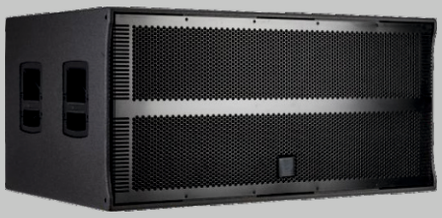

V218

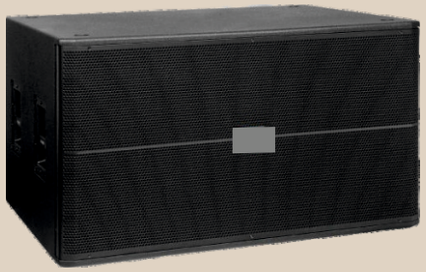

728



725



825



V45



718

DJ MIXER



DDJ-3

DJ MIXER



DDJ 6 EB

DJ MIXER



M-4 3 CHANNEL

DJ MIXER



M-6 4 CHANNEL

DJ MIXER



ATI PIXEL 4

INDIAN SOUND MIXER



ATI-626U 3 CHANNEL

DJ MIXER/ LIVE MIXER



ATI4 4 Channel

1. 4 MIC input
2. There has mute function in each channel.
3. Equiped with PFL in each channel
4. Left, Right main output, effect output
5. 16 kinds of DSP effect
6. Spreatly faders control MP3 volume
7. 48V phantom power supply
8. 7 bands EQ in main output
9. MP3 player with recording function
10. Bluetooth with monitor controller

DJ MIXER/ LIVE MIXER



ATI8 8 Channel

1.8 MIC input,
2. Color display screen.
3. Each channel is equipped with PFL
4. Left, right main output, 1 group of AUX output
5.99 kinds of DSP reverberation effects
6. Extensive pushers to control MP3 volume
7.48V Phantom power supply
8.7 Main output band equalizer
9. An MP3 player with recording function
and Bluetooth. Monitoring controller"

DJ MIXER/ LIVE MIXER



ATI12 12 Channel

1.12 MIC input,
2. Color display screen.
3. Each channel is equipped with PFL
4. Left, right main output, 1 group of AUX output
5.99 kinds of DSP reverberation effects
6. Extensive pushers to control MP3 volume
7.48V Phantom power supply
8.7 Main output band equalizer
9. An MP3 player with recording function
and Bluetooth. Monitoring controller"

DJ MIXER/ LIVE MIXER



BK-8

Model: Ati Pro BK-8
Type: 8-Channel Professional Audio Mixer
DSP Effects: 24-bit Digital Processor (99 Effects)
EQ: 3-Band EQ per channel + 7-Band Stereo Graphic Equalizer
Phantom Power: +48V (per channel)
Connectivity: USB (MP3 playback & PC sound card)
Outputs: Main L/R, Group (G1-G2), AUX Sends, Headphones
Controls: Gain, PAN, AUX, FX, Channel Faders, Mute Switches
Best For: Live sound, recording, streaming, DJ setups, events

DJ MIXER/ LIVE MIXER



BK-12

Model: Ati Pro BK-12
Channels: 12 input channels
EQ: 3-band EQ per channel (High / Mid / Low)
Effects: Built-in 24-bit DSP digital effects
Graphic EQ: 7-band stereo graphic equalizer
Media Player: Integrated MP3 player with USB support
Phantom Power: Yes (for condenser microphones)
Outputs: Main L/R, Group (G1-G2), Phones output
Connectivity: USB sound card interface for PC
Controls: Individual gain, AUX sends, PAN, mute & smooth faders
Application: Live sound, studio recording, church, events, DJ setup

FOLLOW US @ /ATIPROTECH

DG-4M



DG-6M



DGP-4M



DGP-6M



DG SERIES



UT SERIES

UT-16M



UT-12M



UT-8M



NEWLY LAUNCHED MIXERS

KLA SERIES

KLA-12



- Live Mixer 12 Channel Model KLA12 Mixer
- 8 channels monophonic input,/ 2 Group Lotus input *Gain+ 3 section equalization+6AUX +2FX+4GROUP
- Mute switch per channel
- 48V separate switch per channel
- With U-Disk MP3 input ,which could also be connected with computer for recording and playing music ,with Bluetooth function
- With recording MP3
- Built-in Dual 99DSP effector
- With individual computer interface
- listen in
- STEREO INPUTCD input and recording output
- Built-in switch power supply

KLA-16



- Live Mixer 16 Channel Model KLA16 Mixer
- 16 channels monophonic input,/ 1 Group Lotus input *Gain+ 3 section equalization+6AUX +2FX+4GROUP
- Mute switch per channel
- 48V separate switch per channel
- With U-Disk MP3 input ,which could also be connected with computer for recording and playing music ,with Bluetooth function
- With recording MP3
- Built-in Dual 99DSP effector
- With individual computer interface
- listen in
- STEREO INPUTCD input and recording output
- Built-in switch power supply

KLA-24



- Live Mixer 24 Channel Model KLA24 Mixer
- 24 channels monophonic input,/ 1 Group Lotus input 2.Gain+ 3 section equalization+6AUX +2FX+4GROUP
- Mute switch per channel
- 4.48V separate switch per channel
- With U-Disk MP3 input ,which could also be connected with computer for recording and playing music ,with Bluetooth function
- With recording MP3
- Built-in Dual 99DSP effector
- With individual computer interface
- listen in
- STEREO INPUTCD input and recording output
- Built-in switch power supply

KLA-32

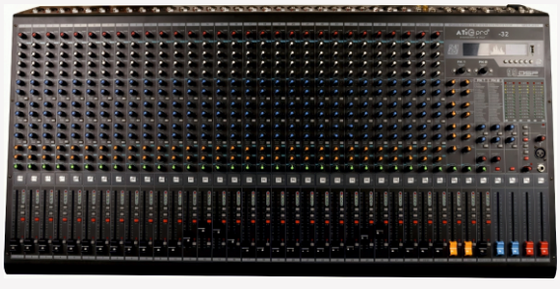

- Live Mixer 32 Channel Model KLA 32 Mixer
- 32 channels monophonic input, 1 Group Lotus input 2.Gain+ 3 section equalization+6AUX +2FX+4GROUP .
- Mute switch per channel.
- 4.48V separate switch per channel.
- With U-Disk MP3 input ,which could also be connected with computer for recording and playing music ,with Bluetooth function.
- With recording Mp3.
- Built-in Dual 99DSP effector.
- With individual computer interface.
- listen in.
- STEREO INPUTCD input and recording output.
- Built-in switch power supply.

NEWLY LAUNCHED MIXERS



SPEAKER PARTS & MATERIALS



DJ Speaker Cone
all imported quality



Damper/ Spider
all imported quality



Lead Wire
all imported quality



Ring Ferrite Magnet
various sizes & grades available



T Yoke & Washer
carbon free for high quality sound



Frames
all imported quality



Voice Coils
imported coils
of different materials



Terminals
copper terminals for high
quality sound & durability



Speaker Ring Gasket



Dust Cap



INDIA'S LEADING PRO LIGHTING BRAND

We are working on various Technologies to give our customer enhanced experience on all our products.

"TECHNOLOGY SUN"



INDIA'S FIRST 18", 5' VOICE COIL

LED PAR LIGHT



SP007H

Voltage	AC90-240V 50/60HZ
Power	150W
Light source	60PCS RGB 3IN1 COLOR
Material	Cast-Aluminum body
DMX Channels	6 channel combination optional
Packing Container	4PCS/Carton
Type	Single Wire

NEW LAUNCH

LED PAR LIGHTS



SP007H TITAN

Power Supply Mode– AC220V/110W/150W
Light Source– 36W/108W/180W LED
Ch– DMX512
Sound Control, Built-in-Program, Master-Slave, Control
Stroboscopic, Color Selection, Color Change
256 High Brightness Level, More Colorful.

LED PAR LIGHTS



ATI-SP014RGBW

Voltage: AC110-220V50-60HZ
Power: 120W or 200W
Light source: 36PCS or 54 PCS RGBW 4IN1
Color Material: Cast-Aluminum body
DMX Channels: 6 channel combination optional
Packing Container: 6 PCS/Carton

NEW LAUNCH

LED PAR LIGHTS



ATI-SP034

Power Supply Mode– AC220V/110W/150W
Light Source– 36W/108W/180W LED
Ch– DMX512
Sound Control, Built-in-Program, Master-Slave, Control
Stroboscopic, Color Selection, Color Change
256 High Brightness Level, More Colorful.

NEW LAUNCH

LED PAR LIGHT



ATI-SP035

Voltage	AC110-220V 50/60HZ
Power	120W or 200W
Light source	54PCS RGB 3IN1 COLOR
Material	Cast-Aluminum body
DMX Channels	6 channel combination optional
Packing Container	6PCS/Carton

NEW LAUNCH

LED PAR LIGHT



SP033 RGBWW

Waterproof

4in1 Smart Par Light
Voltage– AC110-220V 50-60HZ
Power Supply– 180W
Color– RGB+WW
Channel– 8/4CH
Operation– DMX512, Auto, Sound, Master-Slave

FOLLOW US @ /ATIPROTECH

LED PAR LIGHT

NEW LAUNCH



SLIM 84 RGB

84 LED PAR LIGHT
RGB 3 IN 1 COLORS
GENUINE 3 WATT
DMX CONTROL
HEAVY BODY
25° BEAM ANGLE

LED PAR LIGHT

NEW LAUNCH



SP-XX1 CW GOLDEN SKY

Voltage– AC90-240V 50/60HZ
Power– 200W
Illuminant– 4PCS*50W Led
Thoroughfare– 4CH/8CHControl
Mode– DMX512, Self-Walking, Voice Control, Master And Slave

LED PAR LIGHTS

NEW LAUNCH



SP-XX1 WW COB PAR DYNAMITE LIGHT

Voltage– AC90-240V
50/60HZPower– 200W
Illuminant– 4PCS*50W Led
Thoroughfare– 4CH/8CH
Control Mode– DMX512, Self-Walking, Voice Control, Master And Slave

LED PAR LIGHTS

NEW LAUNCH



SP-X11

Power Supply Mode– AC220V/110W/150W
Light Source– 36W/108W/180W LED
Ch– DMX512
Sound Control, Built-in-Program, Master-Slave, Control
Stroboscopic, Color Selection, Color Change
256 High Brightness Level, More Colorful.

LED PAR LIGHT

NEW LAUNCH



SP-XX1 RGB COB PAR SUNSHINE LIGHT

4PCS*50W LED
RGB 3In1, 4 Cable
Metal PG7, Wooden Plug + Metal XLR

LED PAR LIGHT

NEW LAUNCH



SPX2 RGB+WW 4in1 Ultra Par Light

Power Supply– 180W
Cable– 4 Cable
18x10W Per Led
Color– RGB+WW 4 in 1 Led
Separate Warm + Golden Color
Operation– DMX512, Auto, Sound, Master-Slave

FOLLOW US @ /ATIPROTECH

LED PAR LIGHTS

NEW LAUNCH



SLIM 60

18*5 Led Par Light With RGB Ring

Voltage: AC90-240V 50/60HZ
Light source: 18 PCS RGB 3IN1 COLOR WITH RGB RING
Material: Plastic body
DMX Channels: 6 channel combination optional
Control Method: Dmx512, Sound-Activated, Auto

DID YOU KNOW?

ATI PRO Professional Lights are designed for powerful performance and precision control, delivering vibrant colors, uniform brightness, and dynamic effects. Built with high-quality components, they ensure durability, energy efficiency, and reliable operation. Ideal for DJs, events, and commercial setups, ATI PRO lights transform every stage into a visually stunning experience with consistent output and professional-grade quality.

NEW LAUNCH

SHARPY LIGHTS



BAGHEERA SP 400

Model: ATI PRO BAGHEERA SP 400
Input Voltage: AC 100V–264V / 50–60Hz
Lamp: 295W Japanese Bulb
Power Consumption: 450W
DMX Channels: 23 Channels
Protection Rating: IP20

SHARPY LIGHTS



WILD FIRE SP 450

Technical Parameters:
Voltage: AC90-240V/50-60HZ
Power Consumption: 450W
Light Source: 295 W (JAPAN)
Color Temperature: 7500K
Color: Rainbow effect
Colors Wheel: 14 colors + white
Gobos Wheel: 14 fixed gobos + open (3 Glass gobo)
Prism: 2 Kinds of Prism: 8 circular, 8+16+24 circular
Features:
Focus: Electronic
Beam angle: 1.8 degree
Channel: 16CH / 20CH
Control Protocol: RDM, DMX512, automatic and master-slave mode
Product Size: 27*18*46cm
Weight: 12KG

NEW LAUNCH

SHARPY LIGHTS



ATI AVATAR SPOTKING 999

Input Voltage AC 110-240V, 50/60Hz
Rated Power 500W
Light Source 380W Lamp
Lamp Life ≥2000 Hours
Auxiliary LEDs 30 × 0.2W RGB LEDs
DMX Channels 18CH / 19CH
Control Protocol DMX512, RDM
DMX Interface 3-Pin & 5-Pin DMX
Dimming 0-100% Linear Dimming
Strobe 1-20 Flashes/Sec
Display 1.8″ Color LCD
Protection Rating Ip20
Housing Material High Temperature Resistant Engineering Plastic

SHARPY LIGHTS



RED DRAGON 650

Voltage: AC90-240V/50-60HZ
Power Consumption: 650W
Light Source: Ushio 300 (USA)
Color Temperature: 7800K
Average Life: 1500Hrs / 6000Hrs
Color: Rainbow effect
Colors Wheel: 13 colors + white
Gobos Wheel: 13 fixed gobos + open (3 Glass gobo and 2 Beam Reducer)
Prism: 4 Kinds of Prism: 8 circular, 6 linear, 8+16 circular, 8+16+24 circular
Additional Features:
Focus: Electronic
Frost effect
Beam angle: 1.8 degree
Channel: 16CH / 20CH
Control Protocol: RDM, DMX512, automatic and master-slave mode
Working environment: Indoor
Product Size: 32*24.5*54 cm
Weight: 13.5KG

NEW LAUNCH

MINI MOVING HEAD



ATI SP 600 LED BEAM MOVING WITH LED RING

Working Voltage : AC 220V/50Hz
Product Power : 180 W
Lamp Bead Parameter : 100 W White Light
Pattern : 13 Patterns + 1 White Light
Color : 9 Colors + White Light
Light Belt : 6X12/17 0.5W 3-in-1
Control Mode : International DMX 512, 13 Channels
Working Mode : DMX 512, Master/Slave, Self-Walking, Voice Control
Dimming Mode : 0~100% Super Smooth Dimming
Stroboscopic : 25 Times/Second
X Axis : 540°
Y Axis : 270°
Prism : 6 + 12

NEW LAUNCH

MINI MOVING HEAD



ATI SP MH3149

Input Voltage : AC 100–230V
Power Consumption : Max. 250W
Light Source :
13 × 10W RGBW 4-in-1 LEDs (5050)
LED Lifespan : 50,000 Hours
Control Modes : DMX512, Sound Active, Auto Run, Master-Slave
DMX Channels : 9 / 13 / 19 Channels
Strobe Speed :
0–20 Flashes/Second (Adjustable)
Pan Movement : 540°

FOLLOW US @ /ATIPROTECH

NEW LAUNCH

MINI MOVING HEAD



MH-Y260

Model Name ATI MH-Y260
Power Supply AC 100–250V, 50–60Hz
Rated Power 180W
DMX Channels 9 / 12 Channels
Control Modes DMX512, Auto, Sound Active, Master-Slave, RDM
Color Wheel 1 Color Wheel, 8 Colors + White
Gobo Wheel 1 Gobo Wheel, 8 Gobos + White
Pan Movement 540°
Tilt Movement 180°
IP Rating IP20
Application Indoor Use

DID YOU KNOW?

ATI Pro Sharpy Lights create ultra-sharp beams with high-speed pan and tilt movements, transforming any stage into a spectacular visual experience. Designed for concerts, weddings, clubs, and live events, they deliver powerful brightness, dynamic colors, prism effects, and precision control for unforgettable light shows.



FOLLOW US @ /ATIPROTECH

CURTAIN WALL LIGHT

NEW LAUNCH



SP 07 BAR LIGHT

Input Voltage: AC 100-230 V
Input Power: MAX 150 W
Light Source Parameters: 36 RGB Pixels
Light Source Lifespan: 50000 Hours
Control Method: DMX512, Sound Control, Self-propelled, Master-Slave control
Channel Mode: 13/112 Channels
Flashing Speed: 0-20 Times/Second (Adjustable Speed)
Motor Angle: 360 Degree Infinite Rotation
Dimension: 1000*160*150 mm
Net Weight: 4 KG

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR 10

Power Supply: 100~240V AC,50/60HZ
Power Consumption: 160W
Light Source: 18x 10W RGBW 4in1 LEDs Pixel Mapping ready, Each LED controllable
DMX Channels: 9/23/72CH
Dimmer: 0~100% Linear dimming
Beam Angle: 15°
Operation Mode: DMX512, Auto, Master/Slave, Sound ACTIVE
Strobe: 1~20HZ
Protection rate: IP65
Item Size: 1020x80x170mm
Weight: 7.5 KG

CURTAIN WALL LIGHT

NEW LAUNCH

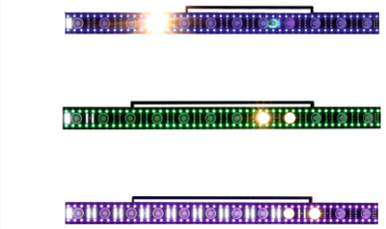

SPB BAR 11

Voltage: AC 100-240 V 50/60 Hz
Power Consumption: 120 W
Light Source: 96pcs 0.2W RGB, 156pcs 0.5W White, 12pcs 3W Warm white
Channel: 5CH/7CH/13CH/74CH/76CH/87CH
Operation Mode: Sound control, Auto run, DMX512 and Master-slave mode
Features: Auto water, Light strip, Beam, Wash, 3in1

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR-11

Power: 84W
Light: 12*5w White Cree Led+84pcs White Led+160pcs Smd 5050 RGB 3 in 1
Main Light: 12*5w Warm White Light Can Be Controlled Separately
Channel: 7/14/75CH
Control mode: DMX512, master-slave, Auto, Sound

CURTAIN WALL LIGHT

NEW LAUNCH



SP X11 BAR LIGHT

Power Supply: AC 110V/240V 50/60 Hz, 12V-120W Switching Power Supply
Light Source: 42 3535 three-in-one 3W Ceramic Lamp Beads
Lens Material: Acrylic
Light Emergent Angle: 4
Signal Number: DMX 512
Built in process sequence: 14-Segment Happy Horse Racing Effect
Control System: DMX512/Self-propelled/ Master-Slave, Voice Control
Outer Shell: Aluminum Profile With 12V Silent Fan
Total Power: 88 W
Waterproof Grade: IP25
Lamp Size: 54.8(length) 9.4(width) 16(height) CM
Channels: 3/9/42 Channels, 9 Channels by Default
Net Weight: 2.7 KG

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR-17

Light Source: 3535 Lamp Beads 40*3 Watts RGB 3in1
Power: 70W
Control mode: DMX512, master-slave, Auto, Sound
Ip Rating: Ip20, Indoor
Dimming: 0-100 Linear Dimming

FOLLOW US @ /ATIPROTECH

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR 22

Voltage– AC90-240V 50/60Hz
Power– 80W
Beads– 24PCS 3W RGB 3in1
Channel– 7CH
Control Mode– DMA, Voice Control, Self-Propelled, Master-Slave
Waterproof Grade– IP65

CURTAIN WALL LIGHT

NEW LAUNCH



SP X22 BAR LIGHT

Voltage: AC 110V/240V 50/60 Hz
Power: 150 W
Light Source: 42*3 W 3535 3 in 1 Ceramic Led, 63*1 W 7070 White Led
Lens Material: Acrylic
Light Angle: 4°
Signal: DMX 512
Built in program: 14 segments + 21 segments of running water effect
Control: DMX512/Auto/Master Slave/ Sound Control
Shell: Aluminum Profile Self-Handling, Good Thermal Conductivity, 12V Silent Fan
Waterproof Level: IP25
Channels: 4/16/63 channels

CURTAIN WALL LIGHT

NEW LAUNCH



ATI SP 34

Voltage: AC 90V-240V 50/60 Hz
Light Source: 3535 Lamp Beads 40*3 watts RGB 3 in 1
Power: 70 W
Power Supply: 5V 100 watts
Control Mode: DMX 512 / Master-Slave / Sound / Auto
Working Mode: Pixel Control 1 by 1
Angle lenses: 3 °
Dimming: 0~100% Smooth Dimming
Strobe: 20 Times/Second

CURTAIN WALL LIGHT

NEW LAUNCH



ATI SP 36

Model Name: ATI SP 36
Power Supply: AC 100–240V, 50/60Hz
Light Source:
24 × RGBW 4-in-1 LEDs + 40 × Auxiliary White LEDs
Control Modes:
DMX512, Auto, Master-Slave, Voice Control
Protocol Support: RDM Protocol

CURTAIN WALL LIGHT

NEW LAUNCH



ATI SP 37

Model Name: ATI SP 37
Power Supply: AC 100–240V, 50/60Hz
Light Source: 36 RGBW 4-in-1 LEDs + Ring
Control Modes:
DMX512, Auto, Master-Slave, Voice Control
Protocol Support: RDM Protocol

CURTAIN WALL LIGHT

NEW LAUNCH

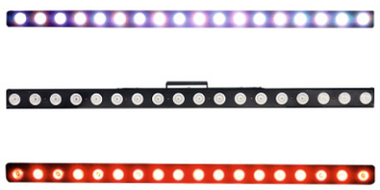

ATI SP 45

Voltage: AC110-220V, 50-60HZ
Power: 200 W
Light source: 18PCS*10W RGBW 4 IN 1 LED
Control mode: auto, master-slave, DMX512
25degree—60degree optic
IP rate: IP65

FOLLOW US @ /ATIPROTECH

CURTAIN WALL LIGHT

NEW LAUNCH



SP 60

Light Source: 576 0.2 W 5050 RGB Three In One LED Beads, Independently Controlled at 48 Pixels, 288 0.5 W 2835 White Light Beads With 48 Pixel Independent Control,
Input Voltage: AC110~220 V
Input Power: MAX 200 W, RGB Full Brightness 130 W, White Flicker Full Brightness 65W
Control Mode: DMX512, Voice Control, Self-Propelled, Master Slave Control

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR-132

Voltage: AC 100-240 V 50/60 Hz
Power Consumption: 120 W
Light Source: 96pcs 0.2W RGB, 156pcs 0.5W White, 12pcs 3W Warm white
Channel: 5CH/7CH/13CH/74CH/76CH/87CH
Operation Mode: Sound control, Auto run, DMX512 and Master-slave mode
Features: Auto water, Light strip, Beam, Wash, 3in1

CURTAIN WALL LIGHT

NEW LAUNCH



BAR 144

Led Type: 192*3W RGB + 22*10W CW LEDs
Control Modes: DMX 512/ Auto / Master-Slave
DMX Channels: 8/16 Channels (Selectable)
Beam Angle: 25 Degree – 45 Degree (Optional)
Dimming: 0-100% Smooth Linear Dimming
Strobe: 0-20 Hz Adjustable
Cooling System: Aluminum Body With Silent Fans
Power Supply: AC 100-240V, 50/60 Hz
Operating Temperature: -20°C to 40°C
Lifespan: 50000+ Hours

CURTAIN WALL LIGHT

NEW LAUNCH



SP BAR-192 RGB

Voltage	AC90-240V 50HZ/60HZ
Power	400W
Light Source	4pcs 100w Jingxin lamp beads
Luminescent Color	White light, warm white highlight, 90%
Luminescent Angle	60 Degrees
Control mode	DMX/master-slave/ self-propelled
Channel	2/6/12CH Channel
Color temperature	3200-5600K



ATI PRO Bar Lights are crafted for powerful linear illumination, delivering vibrant color mixing, uniform wash effects, and dynamic patterns. Equipped with high-efficiency LEDs and advanced control modes, they ensure smooth performance and versatility. Built with durable materials for long-lasting use, ATI PRO Bar Lights are ideal for stages, DJs, and events seeking impactful and professional lighting solutions.

MOVING WASH LIGHT

NEW LAUNCH



MINI 7X20W LED ZOOM

Voltage– 100-240V 50/60HZ
Power– 200W
Light Source– 7*25W 4in1 Lamp Beads
Channel– 16/20CH
Control– DMX512, Master-Slave, Automatic, Voice Control Reset Function With Automatic Error Connection
Dimming– 0-100% Linear Dimming

MOVING WASH LIGHT

NEW LAUNCH



MINI 7X40W

Voltage– AC100-240V 50/60HZ
Power– 350W
Beads– 7X40W 4in1 Lamp Beads
Control Mode– DMX512, Self-Propelled, Master-Slave, Voice Control With RDM Function
Channel– CH25/CH26/CH30/CH58
Dimming– 32bit 0-100% Linear Dimming
Features– Shaking The Head + Dyeing + Flashing + rotating + Auxiliary Light

MOVING WASH LIGHT

NEW LAUNCH



SP007B 19X15 W MOVING HEAD ZOOM LIGHT

Voltage– 180V-240V/50-60Hz
Bulbs– 19x10W RGBW
Power– 250W
Control Signal– DMX512, Insets At The Automatic Procedure
Channel– 15/23CH, DMX512 Channel Control
Motion– Level 540°, Vertical 280°, Horizontal And Vertical Uses The Electronic Replacement Function
Color– 16.7 Million Kinds Of Color Changes
Adjusts The Light– 0-100 Electron Adjusts The Light, Various Colors May Alone Move Also May Mix The Color Tone
Strobe– 1-25/Second High Speed Strobe, But Single Color Mixes The Color Strobe
Zoom Angle– 105-30° Adjust

MOVING WASH LIGHT

NEW LAUNCH



SP 007A 19X15 W MOVING HEAD ZOOM LIGHT WITH RING

Voltage– AC110V-240V/50-60Hz
Rated Power– 250W
Light Source– 198W Four-In-One Led Lamp Beads+60 3535 Three-In-One Led Lamp Beads
Control Channels– 17/25 Standard DMX Channels With RDM Protocol
Dimming Mode– 0-100% Electronic Dimming
Beam Focusing Angle– 10-60°
Scanning Angle– Horizontal 540°, Vertical 213°
Display– Led Lcd Display
Strobe– 0-25 Times/Second Ultra-High-Speed Strobe Effect
Control Mode– DMX512/Master-Slave/Automatic/Sound Control
Protection Grade– Ip20



FOLLOW US @ /ATIPROTECH

PIXEL MATRIX

NEW LAUNCH



3601 RGBW

Voltage– AC100-240V 50/60HZ
Power– 500W
Beads-36 15W 4in1 Leds
Control Mode– DMX512/ Sound/ Auto/ Master-Slave With RDM
Channel– Channel Selection CH04, CH12, Ch144
Strobe Frequency– 1-30Hz
Connection Method– DMX512
Input/OutputProtection Level– Ip20

PIXEL MATRIX

NEW LAUNCH



SP3602 RGBW+A

Voltage: AC90-240V 50-60HZ
Power consumption: 200W
LED beads: 36 full-color three in one 3535 Sci Tech LED beads
Control mode: DMX512 / Sound/ Auto/ Master-slave

PIXEL MATRIX

NEW LAUNCH



ATI SP 3124

Product Type 7×7 Pixel Matrix Light
Power Consumption 180W
LED Configuration 49pcs Gold LEDs + 441pcs RGB LEDs
Control Modes DMX512, Auto Run, Master-Slave, Voice Control
RDM Support Yes
Channel Modes CH04 / CH19 / CH68 / CH196 / CH460
IP Rating Ip20

BLINDER

NEW LAUNCH



SP4X2 RGBW DRAGAN 4 EYE BLINDER

Voltage– AC110-240V 50/60Hz
Power–240W
Lamp Beads– 4* COB 100W Warm Light Beads
Lighting Angle– Reflective Cup 35*
Color Temperature– 3200K-5600K
Best Projection Distance– 15-30m
Control– Dmx512, Sound, Auto, Master-Slave

BLINDER

NEW LAUNCH



SP4X2 CW SCORPION 4 EYE BLINDER

Voltage– AC110-240V 50/60Hz
Power– 240W
Lamp Beads– 4* COB 100W Warm Light Beads
Lighting Angle– Reflective Cup 35*
Color Temperature– 3200K-5600K
Best Projection Distance– 15-30m
Control– Dmx512, Sound, Auto, Master-Slave

BLINDER

NEW LAUNCH



SP4X2 WW SPIDER 4 EYE BLINDER

Voltage	AC90-240V 50HZ/60HZ
Power	400W
Light Source	4pcs 100w Jingxin lamp beads
Luminescent Color	White light, warm whit highlight, 90%
Luminescent Angle	60 Degrees
Control mode	DMX/master-slave/ self-propelled
Channel	2/6/12CH Channel
Color temperature	3200-5600K

FOLLOW US @ /ATIPROTECH

BLINDER 2 EYES

NEW LAUNCH



SP WW LOVELY 2 EYES BLINDER

Voltage: AC100-240V 50/60Hz
Power: 200W
Lamp bead: 2*100W
Color: warm white
Channel: 2/6/4/8CH
Control: Dmx512, Sound, Auto, Master-Slave

BLINDER 2 EYES

NEW LAUNCH



SP CW BEAUTY 2 EYES BLINDER

Voltage– AC90-220 V, 50-60 Hz
Light Source– 2PCS COB
LEDChannel– 2CH/3CH
Control Mode– DMX512, Sound Activated, Master-Slave, Auto

BLINDER 2 EYES

NEW LAUNCH



SP RGBWW RAINBOW 2 EYES BLINDER

Voltage: AC100-240V 50/60Hz
Power: 200W
Lamp bead: 2*100W
Color: RGBWW
Channel: 2/6/4/8CH
Control: Dmx512, Sound, Auto, Master-Slave

ATOMIC STROBE LIGHT

NEW LAUNCH



ST-960

Colors	RGBW Colors
Blinkers	White LED Strip
Controllers	DMX
Sound Mode	Auto

STROBE LIGHTS

NEW LAUNCH



SP 33

Power: AC100~240V 50/60 HZ
Power Supply Power: 24V/100W
Light Source: 30W*6 Bead, 270*5050RGB 0.2W, 180*5730 White Light 0.5W
Control Mode: DMX/Auto/Master-Slave/Sound
Channel: 4CH/11CH/165CH
Dimming: 32bit 0~100% Linear Dimming
Working Temperature: -20~50 degrees
Strobe Frequency: 1~30HZ
Connection Mode: DMX512 input/output

STROBE LIGHTS

NEW LAUNCH



SP 35

Voltage: AC100~240V 50/60 HZ
Power: 12V/80W
Auxiliary Light: 5050RGB*336/5730 White*72/3535W Gold*21
Control Mode: DMX 512/Master Slave/ Sound/With RDM Function
Channel: CH5, CH16, CH96
Linear Dimming: 21RGB+24W+12U Single Point Of Control
Operating Temperature: -30°~50°
Strobe Frequency: 1~30HZ
With Remote Control Function
With RDM Functional Protocol

FOLLOW US @ /ATIPROTECH

NEW LAUNCH

STROBE LIGHTS

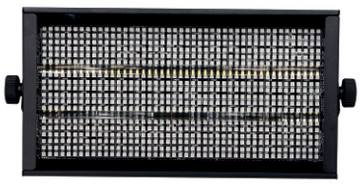

ATI SP 118

Technical Specifications
·**Voltage:** AC 100–240V, 50/60Hz
·**Power Consumption:** 200W
·**Output Power:** 160W
·**Power Supply:** HS Power Supply
Light Source
·**Total Segments:** 135 Segments
·**RGB LEDs:**
810 × 0.5W (5050 RGB LEDs)
30 Segments
·**White LEDs:**
180 × 1W (2835 White LEDs)

NEW LAUNCH

MAPLE LIGHTS



SP-511 (Big Maple)

Voltage– AC100-240V
Power– 300W
Display Mode- LED Digital Tube
DMX Connector– 3Pin XLR2 DMX
Channel Mode Selection
Operation Mode– DMX/Auto/Voice
ControlCamera Flicker Free
Technology, 12**00Hz High**

NEW LAUNCH

MAPLE LIGHTS



SP-511 (mini maple)

Voltage– AC100-240V
Power– 300W
Display Mode- LED Digital Tube
DMX Connector– 3Pin XLR2 DMX
Channel Mode Selection
Operation Mode– DMX/Auto/Voice
ControlCamera Flicker Free
Technology, 12**00Hz High**

NEW LAUNCH

MAPLE LIGHTS



ATI SP 548

Product Name : ATI SP 548
Four Pointed Retro Maple Light
Working Voltage : AC 220V / 50Hz
Product Power : 250W
Light Source : 3 × 60W golden lights,
36 × 3535 3-in-1 beads (3W each),
1 × 40W 4-in-1 lamp bead
Control Mode : International DMX512
Channel Modes :
15 Channels / 20 Channels / 29 Channels
Dimming Method :
0–100% ultra-smooth dimming
Working Modes : DMX512,
Master/Slave, Auto, Sound Control

NEW LAUNCH

MAPLE LIGHTS



ATI SP 565

Voltage: AC 100–240V, 50/60Hz
Power Consumption: 200W
LED Source: 4 × 10W CREE 4-in-1
LEDs + Golden Strobe + 98 RGB LEDs
Lens: High-Definition Optical Lens
Cooling System: Intelligent Air Cooling with
Temperature Control
Strobe: 0–20 flashes/second
Operating Modes: DMX512 / Master-Slave /
Auto / Sound Active
DMX Channels: 16CH / 56CH
Control Protocol:
International Standard DMX512

NEW LAUNCH

MAPLE LIGHTS



ATI SP 566

Input Voltage: AC 100–240V, 50/60Hz
Power Consumption: 200W
Main Light Source: 5 × 60W Retro Golden LEDs
Auxiliary LEDs: 4 × 10W CREE 4-in-1 Beam LEDs
Control Protocol:
International Standard DMX512
Display Panel:
0.39″ 4-Digit Digital Display with 4 Buttons
Pan Rotation:
540° Horizontal with Infinite Rotation
Position Resolution: 8/16-Bit Fine Scanning
Positioning System:
Electronic Automatic Positioning
Operating Modes:
DMX512 / Auto / Sound Active / Master-Slave

FOLLOW US @ /ATIPROTECH

SPARE PARTS NEW LAUNCH

SHARPY BULB



SP260W

SHARPY BULB



SP280W

SHARPY BULB



SP295 TYPE-2

SHARPY BULB



SP311W TYPE-2

SHARPY BULB



SP250W

SHARPY BULB



SP295 TYPE-1

SHARPY BULB



SP311W TYPE-1

SHARPY BULB



SP300W

SHARPY BULB



SP330W

SHARPY BULB



SP350W

SHARPY BULB

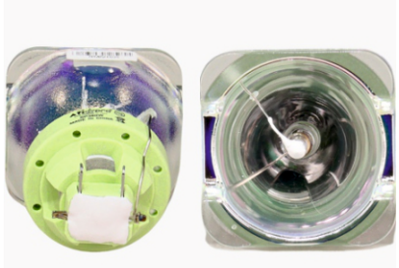

SP380W

SHARPY BULB



SP450W

POWER SUPPLY

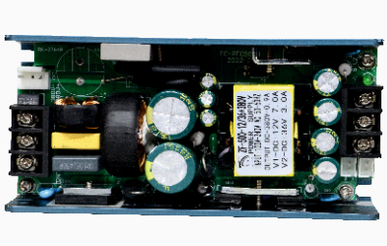

SP311W TYPE-1

POWER SUPPLY



HY600UD (BIG)

POWER SUPPLY



HY600UD (SMALL)

SPARE PARTS NEW LAUNCH

BALLAST



SP230W / 250W

BALLAST



SP295

BALLAST



SP330W/350W

BALLAST



SP380W/400W

CLAMPS



DS20024-3

CLAMPS



DS26031-1Y

CLAMPS



DS26069-1Y

CLAMPS



DS-30001-1Y

CLAMPS



DS-30001-3Y-D1

CLAMPS



DS30007-3Y

CLAMPS



DS30008-3D-D1

CLAMPS



DS-30009-1Y

CLAMPS



DS-30009-2Y-D1

CLAMPS



DS30009-3Y

CLAMPS



DS30009-3D-D1

CLAMPS



DS30015-3Y

CLAMPS



DS30015-2Y

CLAMPS



DS50007-3Y

CLAMPS



DS-50008-2Y

CLAMPS



DS50008-3Y

CLAMPS



DS50008-3Y-D2

8 head red laser bar, each head power is 500mW, total is 4W.
Beam Diameter: 15mm
Effect: Laser ON/OFF effects, tracing effects, etc.
Play mode: Auto, Sound active, DMX512, Master/Slave
Pan angle: 240 degree
Voltage: 110 ~240V;50/60Hz
Power consumption: 150W
Application: Night club, laser show, stage, etc.

LASERS



SP08R

LASERS



SP010RGB

Laser Power: 1W RGB. **Red:** 100mW @638nm, **Green:** 100mW @532nm, **Blue:** 800mW @450nm
Scanner: 20KPPS, max scanning angle is 40 degree
Laser Effect: More than 128 graphics and beam effects built inside. Also the users can use laser control software to edit their own programs and show them by the laser through ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control.
Voltage: 110~240V,50/60Hz
Power consumption: 150W
Application: Night club, party, laser show, etc.

Laser Power: 3W RGB. **Red:** 600mW @638nm, **Green:** 700mW @525nm, **Blue:** 1800mW @450nm
Scanner: 25KPPS, max scanning angle is 50 degree
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card software inside the laser. Users can edit some simple programs and store into the laser, then can display the out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control, SD card.
Voltage: 110~240V, 50/60Hz
Power consumption: 180W
Application: Night club, Party, Laser show, etc

LASERS



SP03RGB

FOLLOW US @ /ATIPROTECH



NEW LAUNCH SP05RGB

Laser Power: 5W RGB. **Red:** 1W @638nm, **Green:** 1W @525nm, **Blue:** 3W @450nm
Scanner: 25KPPS,max scanning angle is 50 degree (40KPPS for options)
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card software inside the laser. Users can edit some simple programs and store into the laser, then can display them out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control, SD card.
Voltage: 110~240V,50/60Hz
Power consumption: 180W
Application: Night club, party, laser show,etc.

Laser Power: 20W RGB laser. **Red:** 5W @638n, **Green:**5W @525nm, **Blue:**10W @450nm.
Scanner: 35KPPS,max scanning angle is 60 degree
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card
software inside the laser. Users can edit some simple programs and store into the laser, then can
display them out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto,Sound active, DMX512,Master/Slave, ILDA PC control,SD card.
Voltage: 110~240V,50/60Hz
Power consumption: 200W
Application: Night club,party,laser show,etc.



NEW LAUNCH SP20RGB



SP01GREEN

Laser Power: 1watt green laser, wavelength is 525nm.
Scanner: 20KPPS,max scanning angle is 40 degree
Laser Effect: More than 128 graphics and beam effects built inside. Also the users can use laser control software to edit their own programs and show them by the laser through ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control.
Voltage: 110~240V,50/60Hz
Power consumption: 150W
Application: Night club, party, laser show, etc.

Laser Power: 15W green laser @525nm
Scanner: 35KPPS,max scanning angle is 60 degree
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card software inside the laser. Users can edit some simple programs and store into the laser, then can display them out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control, SD card.
Voltage: 110~240V,50/60Hz
Power consumption: 200W
Application: Night club, party, laser show, etc.



SP05GREEN



NEW LAUNCH SP06GREEN

Laser Power: 5W green laser @525nm
Scanner: 40KPPS,max scanning angle is 30 degree
Laser Effect: Pure diode green laser with more stable performance and longer working life. The machine can work in -20°C- 50°C. Use LCD display technology, SD card functions. All the pattern sizes, sensitivity, color setting, scanner speed and mirror image, etc are set by button. Easy to operate and understand. Lower the hardware failure rates.
Play mode: ILDA PC Control, DMX512, Sound Active, AUTO, Master/Slave
Voltage: 110~250V,50/60Hz
Power consumption: 100W
Application: Night club, party, laser show, etc.

Laser Power: 10W green laser @525nm
Scanner: 35KPPS,max scanning angle is 60 degree
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card software inside the laser. Users can edit some simple programs and store into the laser, then can display them out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control, SD card.
Voltage: 110~240V,50/60Hz
Power consum tion: 180W



SP10GREEN



NEW LAUNCH SP15GREEN

Laser Power: 5W green laser @525nm
Scanner: 40KPPS,max scanning angle is 60 degree
Laser Effect: More than 128 graphics and beam effects built inside. And there is a free SD card software inside the laser. Users can edit some simple programs and store into the laser, then can display them out. Also they can buy professional laser software to edit their own programs, then display them out through the ILDA PC mode.
Play mode: Auto, Sound active, DMX512,Master/Slave, ILDA PC control, SD card.
Voltage: 110~240V,50/60Hz
Power consumption: 180W
Application: Night club, party, laser show, etc.

Laser Power: 40W RGB Laser, **R:** 8W @638nm, **G:** 10W @520nm, **B:** 12W @450nm
Scanner: 35KPPS,max scanning angle is 60 degree
Laser Effect: The SP040RGB-FB4 is next generation laser show projector system with integrated Pangolin FB4 DMX network interface. It is made of full diode solution and full analog laser modulation. This laser also can be controlled directly by the lighting desk over the Artnet.
Play mode: Auto,Quickshow/Beyond,DMX,Artnet

Voltage: 110~240V,50/60Hz
Power consumption: 180W - 250W
Application: Night club, party, laser show, etc.



NEW LAUNCH SP040RGB-FB4

SMOKE MACHINES



SP1200W DMX

Voltage	AC220V 50Hz/ 110V 60Hz
Power	1200W
Tank capacity	2L
Control mode	Remote Control
Warm up	5min
N.W	5.5KG
G.W	6KG
Packing size	53x33x23CM

SMOKE MACHINES



1200W LED

Voltage	AC220V 50Hz/ 110V 60Hz
Power	1200W
Tank capacity	2L
Control mode	Remote control
Warm up	5min
N.W	5.5KG
G.W	6KG
Packing size	53x33x23CM

NEW LAUNCH

SMOKE MACHINES



SP1500 W

Power: 1200W
Voltage: AC 220V 50Hz
Warm-up time: 3.5minutes
Capacity of tank : 1liters
Fluid consumption(100% output): 5000Cuft/min
Control mode: Wired and wireless remote control
Smoke distance: 2-3meters
Weight: 5.8kgs

SMOKE MACHINES



SP1500W DMX

Voltage	AC220V 50Hz/ 110V 60Hz
Power	1500W
Tank capacity	2L
Control mode	Remote control+Wire Control
Warm up	5min
N.W	5.5KG
G.W	6KG
Packing size	53x33x23CM

SMOKE MACHINES



SP1500W LED

Voltage	AC220V 50Hz/ 110V 60Hz
Power	1500W
Tank capacity	2L
Control mode	Remote control
Warm up	5min
N.W	5.5KG
G.W	6KG
Packing size	53x33x23CM

NEW LAUNCH

SMOKE MACHINES



SP2000W

Power: 2000W
Voltage: AC 220V 50Hz
Warm-up time: 3.5minutes
Capacity of tank: 1liters
Fluid consumption(100% output): 5000Cuft/min
Control mode: Wired and wireless remote control
Smoke distance: 2-3meters
Weight: 5.8kgs

FOLLOW US @ /ATIPROTECH

FOG MACHINE



SP-FSB COLUMN

Voltage: AC110/230V 50~60Hz
Power: 2000W
Light Beads: 24 RGB LED
Warm-up Time: 8min
Tank Capacity: 5L
Spray Distance: 10m
Smoke Output: 2000cu.ff/min
Control Mode: DMX512 control, remote-control, manual

FOG MACHINE



SP-HZ2800 HAZE

Voltage: 220V, 60Hz/50Hz
Power: 220V 800W
Heating time: 220V 2 minutes (110V 3 minutes)
Electronic temperature control: 70℃~80℃
Control mode: remote control + 512 control lift
Consumables: Titanium Composite



FOG LIQUID

1bot / 5L	**4bots / 1ctn**
G.W	20.5KG
Packing Size	31x28x38CM

FOG MACHINE



SP-HZ2500 HAZE

Voltage: 220V, 60Hz/50Hz
Power: 2500w
Heating time: 220V 2 minutes (110V 3 minutes)
Electronic temperature control: 70℃~80℃
Control mode: remote control + 512 control lift
Consumables: Titanium Composite

LED FOLLOW



330W

Voltage – AC110V-240V 50HZ/60HZ
Power Consumption– 330W
Light Bulb Specifications– 350W Led Beads
Color– A Color Wheel With 6 Colors + Open
Control Mode– Brightness Adjustable
Heat Dissipation System– High Strength Air Cooling
Aperture Effect– Aperture Size Is Optional
Stroboscopic– 1-7 Second
Stroboscopic Angle– 23 Degrees
Safety Measures– Conform To Various Safety Standards. IP20 Protection Level, Power Line Conforms To CE20/22 Three-Level Standard, High Temperature, Automatic Cut-Off Protection Device
Shell– Aluminum Alloy Wrapping
Size– 71x30x36 Cm

LED FOLLOW



440W

Support Voltage – AC110V-240V 50HZ/60HZ
Power Consumption– 440W
Light Bulb Specifications– 500W Led Beads
Color– A Color Wheel With 6 Colors + Open
Control Mode– Brightness Adjustable
Heat Dissipation System– High Strength Air Cooling
Aperture Effect– Aperture Size Is Optional
Stroboscopic– 1-7 Second
Stroboscopic Angle– 23 Degrees
Safety Measures– Conform To Various Safety Standards. IP20 Protection Level, Power Line Conforms To CE20/22 Three-Level Standard, High Temperature, Automatic Cut-Off Protection Device
Shell– Aluminum Alloy Wrapping

FOLLOW US @ /ATIPROTECH

CONTROLLERS



INDIA'S ONLY DMX WITH DUAL POWER SUPPLY

192 DMX

Voltage AC90-240V 50HZ/60HZ
Channel 192DMX CHANNEL
Scenes 8 programmable SCENES.
Features 8 adjustable potentiometer to adjust the output size.
Built-in MIC head, and voice features.
Automatically trigger state, tap sync button or the speed potentiometer to determine automatically trigger time.
4 LED digital display.
Show the first show changes second place display scenes Third, four display banks, Black out function can be used manually.
Chases programming and chases run function can be used manually output delay function, the fade time potentiometer to adjust the delay time.
Packing size 54x16x10cm
Packing weight 1.55kg

CONTROLLERS



DMX 200

Channel 192, controlled amount of 16 channel 12
- Six Lights Program
- New Programming idea, step can edit and store 184 scenarios
- Edit and run walk each lamb program100
- Can be combined by the memory of any\ built-in voice control lamb Function, black field o/p function
- Light speed and gradient adjustment function

CONTROLLERS



DMX_SPLITTER

Power AC 110v-240V
Frequency 50Hz - 60 Hz
Signal Input Interface Standard DMX512 signal, 3pin/ 5 pin
- Gold plated XLR male and female socket in parallel
- Output signal interface use three-pin gold-plated XLR female socket
- Transformer based isolation per channel

CONTROLLERS



ARTNET

·**Input Protocol:** ARTNET (Ethernet)
·**Output:** 8 x DMX Ports
·**Network Ports:** 2 x RJ45 (LAN1 & LAN2)
·**Display:** LCD Screen
·**Controls:** Menu, Enter, Up, Down Buttons
·**Power Supply:** AC 100–240V, 50/60Hz
·**Mounting:** Standard Rack Mount (1U)

CONTROLLERS



MINI PEARL 1024B

STABLE PROCESSOR

STABLE RAM

MADE WITH HIGH QUALITY JAPANESE BUTTONS

DMX512 channels	1024
Mating number of fixtures	96
Each scanner maximum available control channels	40 main channel +40 trim
Fixture library	R20 pearl light library
Scenes that can be saved	60
Scenes that can run simultaneously	10
Steps in a multi-step scenario	600
Scene time control	fade in,fade out,LTP sliding
Graphics can be stored for each scene	5
Graphics generator	can generate dimmer, P/T, RGB, CMYK, Color, Gobo, Iris, Focus Graphics
Graphics can be run at the same time	10
Master fader	Global, Repeat, Lighting
U disk read	Support FAT32format

CONTROLLERS



MADE WITH HIGH QUALITY JAPANESE BUTTONS

PILOT 2000

- Universal DMX-512 controller able to control upto 40 units.
- Each unit with maximum 36 channels. Total of 512 DMX Channels.
- Able to control dimmer pack with maximum of 192 channels
- 40 programs or chases, m chases, presets each program chase.
- Able to use 4 programs, 4 chases, 4m chases, 4 presets at the same time.

CONTROLLERS



TIGER TOUCH 2

- Titan 11.1, 8 DMX Ports
- 10 pageable playbacks, 10 static playbacks
- Built in UPS
- 4 physical DMX outouts, so upto 16 over Artnet or sACN-8192 channels
- Expansion upto 64 universes
- Dual ethernet port
- External touch screen support
- 10 programmable executor buttons
- Conveniently accessible front loading USB

- Powerful expert titan 10.1/11.1 systems
- Core i5 Dual core processor, Intel 120G SSD, 4G (DDR3) notebook memory.
- 12 DMX output, 6144 channels
- Artnet Support extend to 64 DMX output
- UPS power protector built in
- Page mode play areas
- SACN merger
- Playback program user code
- Midi Show Control
- Touch trackball settings

CONTROLLERS



TT2

FOLLOW US @ /ATIPROTECH


YOGIRO
JAPAN

FERRITE SERIES



YJ12X350

MALAYSIAN CONE

Power Rating	350W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15"/ 7.5 Kg
Magnet Size	190x90x20 Y35
Frequency	50 Hz - 3.5 KHz
Damper	Red Silicon

FERRITE SERIES



YJ12X400

MALAYSIAN CONE

Power Rating	400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" In/ Out
Size / Net Wt.	12"/ 4.8 Kg
Magnet Size	190x90x25 Y35
Frequency	55 Hz - 3.5 Khz
Damper	Red Silicon

FERRITE SERIES



YJ12X500

MALAYSIAN CONE

Power Rating	550W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" In/ Out
Size / Net Wt.	12"
Magnet Size	190x90x25 Y35
Frequency	–
Damper	Red Silicon

NEO SERIES



YJ12N76

Power Rating	500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" CCAW
Size / Net Wt.	12" / 3.8kg
Magnet Size	25x12x12 N40
Frequency	45 Hz - 2.5 KHz

NEO SERIES



YJ12N351

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" In / Out
Size / Net Wt.	12" / 4.8 kg
Magnet Size	80x10 N40
Frequency	50Hz - 3.5Khz

FERRITE SERIES



YJ15X400

MALAYSIAN CONE

Power Rating	400W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size / Net Wt.	15" / 9 Kg
Magnet Size	190x90x20 Y35
Frequency	55 Hz - 3.5 Khz
Damper	Red Silicon

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



YJ15X351

Power Rating	500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" CCAW
Size / Net Wt.	15" / 11 kg
Magnet Size	200x100x25 Y35
Frequency	45 Hz - 3.0 KHz

FERRITE SERIES



YJ15X500

Power Rating	500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" CCAW
Size / Net Wt.	15" / 11 kg
Magnet Size	200x100x25 Y35
Frequency	45 Hz - 3.0 KHz

FERRITE SERIES



YJ15X600

MALAYSIAN CONE	
Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" in/out
Size / Net Wt.	15" / 11.4 kg
Magnet Size	220x110x25 Y35
Frequency	35 Hz - 2.0 KHz
Damper	Red Silicon

FERRITE SERIES



YJ15X451

Power Rating	1200W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	4.5" In/ Out
Size/ Net Wt.	15"/ 12.5 Kgs
Magnet Size	250x140x25 Y35
Frequency	35 Hz- 1.5 Khz

NEO SERIES



YJ15N76

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3" CCAW
Size / Net Wt.	15" / 4kg
Magnet Size	25x12x12 N40
Frequency	35 Hz - 3.5 KHz

NEO SERIES



YJ15N351

Power Rating	800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" In / Out
Size / Net Wt.	15" / 5 kg
Magnet Size	25x12x12 N40
Frequency	40 Hz - 3.5 KHz

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



YJEC15400

MALAYSIAN CONE

Power Rating	400W
Nominal Impedance	8 Ohm
Frame	Aluminium
Voice Coil	3" SV
Size/ Net Wt.	15"/ 9Kg
Magnet Size	190x90x20 Y35
Frequency	50Hz - 3.5 Khz
Damper	Yellow Silicon

15

FERRITE SERIES



YJY15600

MALAYSIAN CONE

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" in/out
Size / Net Wt.	15" / 11.4 kg
Magnet Size	220x110x25 Y35
Frequency	35 Hz - 2.0 KHz
Damper	Yellow Silicon

15

FERRITE SERIES



YJ18TBW100

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	18" / 14 kg
Magnet Size	220x110x30 Y35
Frequency	35 Hz - 2.0 KHz **(Double Magnet)**

18

FERRITE SERIES



YJ18GPA1500

MALAYSIAN CONE

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" SV 4 Layers
Size / Net Wt.	18" / 15 kg
Magnet Size	220x110x20 Y35 Double Magnet
Frequency	35Hz - 1.8Khz
Damper	Red Silicon

18

FERRITE SERIES



YJ18X451

MALAYSIAN CONE

Power Rating	1800W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5" In/ Out
Size / Net Wt.	18" / 20 Kg
Magnet Size	253x140x25 Y35
Frequency	35 Hz - 1.0 KHz
Damper	Red Silicon

18

FERRITE SERIES



YJ18X1500

MALAYSIAN CONE

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5" In/ Out
Size / Net Wt.	18" / 12.5 Kg
Magnet Size	220x110x25 Y35
Frequency	35Hz - 2.5 Khz
Damper	Red Silicon

18

FOLLOW US @ /ATIPROTECH

NEO SERIES



YJ18N1500

Power Rating	1500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4.5″
Size / Net Wt.	
Magnet Size	110X10 mm
Frequency	35 Hz - 1.5 Khz

18

NEO SERIES



YJ18N2000

MALAYSIAN CONE

Power Rating	1999 W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	5″ SV In/Out
Size / Net Wt.	18″ / 10 kg
Magnet Size	120x14 N40
Frequency	35 Hz - 2.5 KHz
Damper	Red Silicon

18

NEO SERIES



YJY1850

MALAYSIAN CONE

Power Rating	2000W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	5″ in/out
Size / Net Wt.	18″ / 22 Kg
Magnet Size	280x140x25 Y35 **(4 Pcs Magnet)**
Frequency	35 Hz - 1.5 Khz
Damper	Red Silicon

18

FERRITE SERIES



YJ1852 PLATINUM HD+

Power Rating	1900+200W
Nominal Impedance	8 Ohm
Frame	GBF
Voice Coil	5″ In/Out
Size/ Net wt.	18″
Magnet Size	280X30 /Y35
Frequency	35 Hz - 2 Khz

18

FERRITE SERIES



YJ21FW600

MALAYSIAN CONE

Power Rating	2500 W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	6" In/ Out Coil
Size / Net Wt.	21"
Magnet Size	330x30 Y35
Frequency	35Hz - 1.5 Khz
Damper	Red Silicon

21

FERRITE SERIES



YJ 2160 HD

Model- YJ 2160 HD
Power Rating- 3000W
Nominal Impedance- 8 Ohms
Frame- Aluminium
Voice Coil- 6″ In/Out 4 Layer
Size- 21″
Magnet Size- 330×30 Y35
Frequency- 35 Hz – 1.5 Khz

21

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



YJ-2152 PLATINUM HD+

Model Name – YJ-2152 PLATINUM HD+
Size – 21 Inch's
Power – 3500 + 200 Watts
Impedance – 8 Ohms
Voice Coil – 6 Inch's (4 Layers)
Frequency Range – 30 Hz – 1.5 Khz
Magnet Size – 330*30 MM

21

FERRITE SERIES



YJY12400

Power Rating	410W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	3” In/ Out
Size/ Net Wt.	12”
Magnet Size	190x20MM (Y35)

12

FERRITE SERIES



YJY12351

Power Rating	500W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	3.5” In/ Out
Size/ Net Wt.	12”
Magnet Size	190x25MM (Y35)

12

NEO SERIES



YJY 12-600 NEO

Size – 12 inch's
Power RMS – 600 W
Voice Coil Size – 3 Inch
Impedance – 8 Ohms
Magnet Size – 25*10*5 MM
Frequency – 35 Hz – 1.0 KHZ

12

FERRITE SERIES



YJY15400

Power Rating	410W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	3” In/ Out
Size/ Net Wt.	15”
Magnet Size	190x20MM (Y35)

15

FERRITE SERIES



YJY15600

Power Rating	650W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	3” In/ Out
Size/ Net Wt.	15”
Magnet Size	190x20MM (Y35)

15

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



YJY151000

Power Rating	2000W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	4” In/ Out
Size/ Net Wt.	15”
Magnet Size	220x110x30MM (Y35)

15

FERRITE SERIES



YJY18451

Power Rating	1700W
Nominal Impedance	8 Ohms
Frame	Aluminium Exl.
Voice Coil	4.5” In/ Out
Size/ Net Wt.	18”
Magnet Size	253x25MM (Y35)

18

FERRITE SERIES



YJY PD-1852 HD

Power Rating	1999W
Nominal Impedance	8 Ohm
Voice Coil	5 Inch's (4 Layers)
Size/ Net wt.	18”
Magnet Size	280X30 /Y35
Frequency	35 Hz - 1.5 Khz

18

FERRITE SERIES



YJY 2195

Power Rating	3000W
Nominal Impedance	8 Ohms
Voice Coil	6” In/ Out
Size/ Net Wt.	21”
Magnet Size	330x30MM (Y35)

21

FERRITE SERIES



YJY2195H-4L

Power Rating	3500W
Nominal Impedance	8 Ohms
Voice Coil	6 Inch's (4 Layers)
Size/ Net Wt.	21”
Magnet Size	330*25 MM (Dual Magnet)
Frequency	40 Hz - 1.5 Khz

21

FERRITE SERIES



ATI ES2 2150

Power Rating	3000W
Nominal Impedance	8 Ohm
Frame	GBF
Voice Coil	6” In/Out
Size/ Net wt.	21’/ 29.5 Kgs
Magnet Size	330mm /Y35
Frequency	40 Hz - 3 Khz

21

FOLLOW US @ /ATIPROTECH

FERRITE SERIES DRIVERS



YJ-450

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 60 watt
Continuous Power Handling 120 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1200-20000 Hz
Voice Coil Diameter 1.75 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 115mm
Cover(or Adaptor) Material Plastic

FERRITE SERIES DRIVERS



YJ-518

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 80 watt
Continuous Power Handling 160 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1000-18000 Hz
Voice Coil Diameter 2 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 134mm
Cover(or Adaptor) Material Plastic

FERRITE SERIES DRIVERS



YJ-750R

Throat 2 Inch
Nominal Impedance 8 Ohm
Nominal Power Handling 120 Watt
Continous Power Handling 240 Watt
Sensitivity(1W/1m) 106+/- 2dB
Frequency Range(-10dB max) 700Hz - 18000Hz
Voice Coil Diameter 3 Inch
Voice Coil Material CCAW
Diaphragm Material Kapton
Magnet Type Strontium Ferrite
Magnet Size 170x20 mm
Cover (or Adaptor) Material Aluminium

- Heavy weight
- 100% thick plates
- Pure sound
- No cost cutting to compromise quality
- Exclusive design

YOGI PRO, a trusted sub-brand of ATI PRO Technologies, is dedicated to delivering reliable audio solutions at affordable prices. Designed for everyday DJs and sound enthusiasts, YOGI PRO products combine essential performance, durability, and value for money — making professional-quality sound accessible without compromising on quality or efficiency.

DID YOU KNOW?

NETWORK PLATES



YJ-425+

Application
2×300 – 500 Watts
15″ Speaker1×40 – 80 Watts HF



YJ-725+

Application
2×600 – 1000 Watts
15″ Speaker1×100 – 150 Watts HF



YJ-925+

Application
1×600 – 800 Watts
15″ Speaker1×100 – 150 Watts HF



YJ-450



YJ-518



YJ-750

PA AMPLIFIER

PA AMPLIFIERS



EXCLUSIVE MODEL
NEW LAUNCH

YJ-301

ECONOMICAL PRICE

Power Rms-300 Watt
Inputs-6 Mic & 2 Aux
Speaker Outputs- 4/8 ohms, 70/100 volts
Frequency Response-50-15000HZ+-dB
Built-in Digital Echo Effect
2Way Tone Control
Horn/Speaker Switch
Dedicated Echo On/O ffSwitch
Protection-AC Circuit Breaker, Output Short Circuit & Over Temperature With Visual Led Indication
Power Supply- AC 220V

PA AMPLIFIERS



EXCLUSIVE MODEL
NEW LAUNCH

YJ-701

ECONOMICAL PRICE

Power RMS – 700 Watts
Speaker Outputs – 2/4 ohms, 70/100 Volts
3 Way Tone Control Horn / Speaker SwitchForce Cooling
Protection: AC Circuit Breaker, Output Short Circuit & Over TemperatureWith Visual LED Indication.
Power Supply: AC 220V 50 Hz

PA AMPLIFIERS



EXCLUSIVE MODEL
NEW LAUNCH

YJ-1202

ECONOMICAL PRICE

Power RMS – 1200 Watts
Speaker Outputs – 2/4 ohms, 70/100 Volts
3 Way Tone ControlHorn / Speaker Switch, Force Cooling
Protection: AC Bi-Metal Circuit Breaker, Short Circuit & Over Temperature With Visual LED Indication.
Power Supply: AC 220V 50 Hz

DUAL CHANNEL AMPLIFIER



EXCLUSIVE MODEL
NEW LAUNCH

YJ-2K2

POWER OUTPUT: 2200W Max.
OUTPUT REGULATION: ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL: 200mV @100KΩ, 1V @10KΩ
FREQUENCY RESPONSE: 50-15,000 Hz +-3d
BSPEAKER OUTPUT: 2,4Ω 70,100V
POWER SUPPLY: AC 220/240 VOLT / 50-60Hz
POWER CONSUMPTION: 220 VA



EXCLUSIVE MODEL
NEW LAUNCH

YJ-3K2

POWER OUTPUT: 3600W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL: 200mV @100KΩ, 1V @10KΩ
FREQUENCY RESPONSE: 50-15,000 Hz +-3dB
SPEAKER OUTPUT: 2,4Ω 70,100V
POWER SUPPLY: AC 220/240 VOLT / 50-60Hz
POWER CONSUMPTION: 220 VA



EXCLUSIVE MODEL
NEW LAUNCH

YJ-4K2

POWER OUTPUT: 4200W Max.
OUTPUT REGULATION : ≤ 2 dB, no load to full load at 1kHz
INPUT CHANNEL: 200mV @100KΩ, 1V @10KΩ
FREQUENCY RESPONSE: 50-15,000 Hz +-3dB
SPEAKER OUTPUT: 4,8,16Ω 70,100V
POWER SUPPLY: 230/240V AC, 50-60Hz 12V DC
POWER CONSUMPTION: 180 VA
COOLING: 4 X AIR FORCED COOLING



EXCLUSIVE MODEL
NEW LAUNCH

YJ-2K2 HD

AC Mains– 240V
Power Consumption– 3000VA
Rated Output- (2 Ohms)– 1100W+1100W
Rated Output- (4 Ohms)– 750W+750W
Rated Output- (8 Ohms)– 475W+475W
Rated Output- (4 bridge Mode)– 2200W
THD– 0.9%
Frequency Response– 20-20000Hz
Input Sensitivity– 1-1.2V Unbalanced
Damping factor– 400:1(8Ohm)
Input Impedance– 10k
S/N Ratio– 90dB
Low Pass Filter– 100Hz
Input Connections– 2male 2 female XLR
Cooling– 2x fixed speed fan
Front Panel Controls– 2x 41 step level Control
Output Connections– 2x 4way Speakon & Terminal
Protection– Temperature, DC Short Circuit



EXCLUSIVE MODEL
NEW LAUNCH

YJ-3K2 HD

AC Mains– 240V
Power Consumption– 4000VA
Rated Output- (2 Ohms)– 1600W+1600W
Rated Output- (4 Ohms)– 1100W+1100W
Rated Output- (8 Ohms)– 750W+750W
Rated Output- (4 bridge Mode)– 3200W
THD– 0.9%
Frequency Response– 20-20000Hz
Input Sensitivity– 1-1.2V Unbalanced
Damping factor– 400:1(8Ohm)
Input Impedance– 10k
S/N Ratio– 90dB
Low Pass Filter– 100Hz
Input Connections– 2male 2 female XLR
Cooling– 2x fixed speed fan
Front Panel Controls– 2x 41 step level Control
Output Connections– 2x 4way Speakon & Terminal
Protection– Temperature, DC Short Circuit



EXCLUSIVE MODEL
NEW LAUNCH

YJ-4K2 HD

AC Mains– 240V
Power Consumption– 5000VA
Rated Output- (2 Ohms)– 2100W+2100W
Rated Output- (4 Ohms)– 1500W+1500W
Rated Output- (8 Ohms)– 950W+950W
Rated Output- (4 bridge Mode)– 4200W
THD– 0.9%
Frequency Response– 20-20000Hz
Input Sensitivity– 1-1.2V Unbalanced
Damping factor– 400:1(8Ohm)
Input Impedance– 10k
S/N Ratio– 90dB
Low Pass Filter– 100Hz
Input Connections– 2male 2 female XLR
Cooling– 2x fixed speed fan
Front Panel Controls– 2x 41 step level Control
Output Connections– 2x 4way Speakon & Terminal
Protection– Temperature, DC Short Circuit

FOLLOW US @ /ATIPROTECH

DUAL CHANNEL AMPLIFIER



EXCLUSIVE MODEL
NEW LAUNCH

YTZA-5000 E

Power Output – 350W + 350W Max, 250W + 250W RMS @ 10% THD
Output Regulation – ≤2 dB, no load to full load at 1kHz
Input Channels – Mono 6 × Mic, 2 × Aux, Stereo L/R, Line L/R
Frequency Response – 50-15,000Hz ±3dB
Signal to Noise Ratio – 60dB
Tone Controls – Bass & Treble
Effect – Echo Effect in Two Inputs
Speaker Outputs – 4Ω, 8Ω, 70V & 100V for each zone
Power Supply – AC: 220-240V 50/60Hz DC: 24V (2×12V Car Battery)

YOGI PRO stands for affordability without compromise. As a sub-brand of ATI PRO Technologies, it provides dependable audio solutions crafted for consistent performance and long-term use. Built for value-conscious users, YOGI PRO delivers strong output, clear sound, and trusted quality at a price that fits every setup.

DID YOU KNOW?

AUDIOFLIX

Engineered In Germany

NEO SERIES

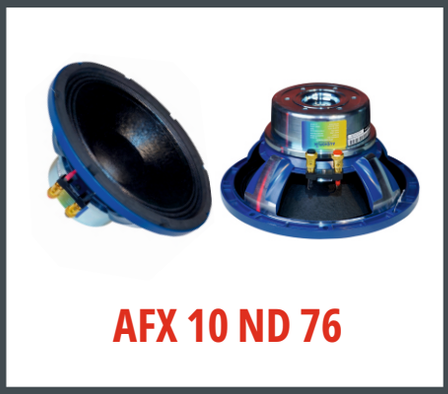

AFX 10 ND 76

ModelAFX 10ND76 (NEO)
Nominal Diameter 10 Inch
Program Power 900 Watts
AES Power Handling 450 Watts
Voice Coil 3 Inch ICCAW
Magnet Type Neodymium (NEO)
Frequency Range 35Hz – 1kHz
Nominal Impedance 8 Ohms

10

FERRITE SERIES



AFX12400

Power Rating	400W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12'/ 6.9 Kgs
Magnet Size	190x90x20/Y35
Frequency	50 Hz - 3.5 Khz

12

FERRITE SERIES



AFX12400 V

Power Rating	400W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12"
Magnet Size	Y35
Frequency	50 Hz - 3.5 Khz

12

FERRITE SERIES



AFX12400 V1

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12"/ 6.9 Kgs
Magnet Size	190x90x20 mm
Frequency	50 Hz - 3.5 Khz

12

NEO SERIES



AFX12400 V2

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12"/ 6.9 Kgs
Magnet Size	190x90x20 mm
Frequency	50 Hz - 3.5 Khz

12

FERRITE SERIES



AFX12400 TURBO

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12"/ 6.9 Kgs
Magnet Size	190x90x20 mm
Frequency	50 Hz - 3.5 Khz

12

FOLLOW US @ /ATIPROTECH

AUDIOFLIX
Engineered In Germany

FERRITE SERIES



AFX12G301

Power Rating	400W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12'/ 6.9 Kgs
Magnet Size	190x90x20/Y35
Frequency	50 Hz - 3.5 Khz

12

NEO SERIES



AFX12600 NEO

Power Rating	600W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	12"/ 5.2 Kgs
Magnet Size	25x10x5mm (5Pcs)
Frequency	35 Hz - 1.0 Khz

12

FERRITE SERIES



AFX15400

Power Rating	400W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	15"/ 6.2 Kgs
Magnet Size	190x90x25/Y35
Frequency	50 Hz - 2.5 Khz

15

FERRITE SERIES



AFX15400 V1

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	15"/ 6.2 Kgs
Magnet Size	190x90x25 mm
Frequency	50 Hz - 2.5 Khz

15

FERRITE SERIES



AFX15400 V2

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	15"/ 6.2 Kgs
Magnet Size	190x90x20 mm
Frequency	50 Hz - 2.5 Khz

15

FERRITE SERIES



AFX15400 TURBO

Power Rating	400-800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	3"
Size/ Net wt.	15"/ 6.2 Kgs
Magnet Size	190x90x20 mm
Frequency	50 Hz - 2.5 Khz

15

FOLLOW US @ /ATIPROTECH

AUDIOFLIX
Engineered In Germany

FERRITE SERIES



AFX15500

Power Rating	500W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	3.5" CCAW
Size / Net Wt.	15" / 11 kg
Magnet Size	200x100x25 Y35
Frequency	40 Hz - 2.5 KHz

15

FERRITE SERIES



AFX15X401

Power Rating	600W
Norminal Impedence	8 Ohm
Frame	Aluminium
Voice Coil	4" In / Out
Size / Net Wt.	15" / 11.4 Kgs
Magnet Size	220x110x25 Y35
Frequency	35Hz - 2.0 Khz

15

FERRITE SERIES



AFX15600

Power Rating	600W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4"
Size/ Net wt.	15"/ 13.3 Kgs
Magnet Size	220x110x25 Y35
Frequency	40 Hz - 2.0 Khz

15

FERRITE SERIES

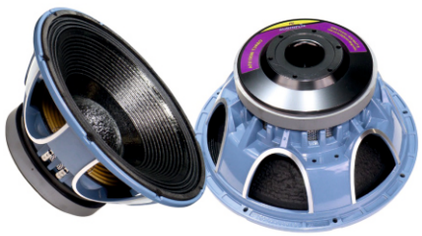

AFX15600 TURBO

Power Rating	600-1200W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4"
Size/ Net wt.	15"/ 10.3 Kgs
Magnet Size	220x110x25 mm
Frequency	40 Hz - 2.0 Khz

15

FERRITE SERIES



AFX15650

Power Rating	650W
Max Power	1300W
Nominal Impedance	8 Ohm
Voice Coil	4" in/out
Frequency	40 Hz - 1.0 Khz
Magnetics	Barium Ceramic

15

FERRITE SERIES



AFX15800

Power Rating	800W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4"
Size/ Net wt.	15'/ 11 Kgs
Magnet Size	220x110x30 Y35
Frequency	45 Hz - 2.5 Khz

15

FOLLOW US @ /ATIPROTECH

AUDIOFLIX
Engineered In Germany

FERRITE SERIES



AFX15451

Power Rating	1200W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4.5"
Size/ Net wt.	15'/ 13.5 Kgs
Magnet Size	250x140x30 Y35
Frequency	40 Hz - 2.0 Khz

15

FERRITE SERIES



AFX18451

Power Rating	1500W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4.5"
Size/ Net wt.	18"/ 14.5 Kgs
Magnet Size	250x140x30 Y35
Frequency	45 Hz - 2.0 Khz

18

FERRITE SERIES



AFX18451 TURBO

Power Rating	1600W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	4.5"
Size/ Net wt.	18"/ 14.5 Kgs
Magnet Size	250x140x30 mm
Frequency	45 Hz - 2 Khz

18

FERRITE SERIES



AFX1850PD

Power Rating	2000W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	5"
Size/ Net wt.	18"/ 16.3 Kgs
Magnet Size	280x140x25 Y35
Frequency	50 Hz - 2 Khz

18

FERRITE SERIES



AFX1850 TURBO

Power Rating	1999W
Nominal Impedance	8 Ohm
Frame	Cast Aluminium
Voice Coil	5"
Size/ Net wt.	18"/ 6.2 Kgs
Magnet Size	280x140x25 mm
Frequency	50 Hz - 2.0 Khz

18

FERRITE SERIES



AFX 18458

Power Rating – 1800 W
Nominal Impedance – 8Ω
Sensitivity – 98 dB
Frequency Range – 35HZ-1KHz
Chassis Type – Aluminum
Magnet Type – Ferrite
Magnet Size – 280X25 mm
Voice coil Diameter – 5 inch In/Out
Number of layers – 2(Inside/Outside)
Cone material – Glass Fiber

18

FOLLOW US @ /ATIPROTECH

AUDIOFLIX HF

FERRITE SERIES DRIVERS



AFX-450

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 60 watt
Continuous Power Handling 120 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1200-20000 Hz
Voice Coil Diameter 1.75 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 115mm
Cover(or Adaptor) Material Plastic

FERRITE SERIES DRIVERS



AFX-518

Throat 1 inch
Nominal Impedance 8 ohm
Nominal Power Handling 80 watt
Continuous Power Handling 160 watt
Sensitivity(1W/1m) 110 ±2dB
Frequency Range(-10dB max) 1000-18000 Hz
Voice Coil Diameter 2 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 134mm
Cover(or Adaptor) Material Plastic

FERRITE SERIES DRIVERS



AFX-750

Throat 2 inch
Nominal Impedance 8 ohm
Nominal Power Handling 110 watt
Continuous Power Handling 220 watt
Sensitivity(1W/1m) 106 ±2dB
Frequency Range(-10dB max) 600-16000 Hz
Voice Coil Diameter 3 inch
Voice Coil Material CCAW
Former Material Kapton
Diaphragm Material Titanium
Magnet Type Strontium Ferrite
Magnet Sizes 170mm
Cover(or Adaptor) Material Aluminium

MID PRESSURE DRIVERS



AFX-4599

Throat – 2 inch
Nominal Impedance – 16 Ohm
Sensitivity (1W/ 1M) – 112+-2dB
Middle Range (AES)- 400 W
High Range (AES) – 160 W
Frequency Range – 300 – 20 KHZ
Frequency Range (-10dB Max) – 700-18 KHZ
Voice Coil Diameter – 4 inch
Voice Coil Material – CCAR
Voice Coil Former – kapton
Diaphragm Material – Titanium
Magnet type – Neo

MID PRESSURE DRIVERS



AFX-D2

Throat Diameter: 1.5 in (38 mm)
Mounting Type: 4XM6 Holes 90° on 82.5 mm
Nominal Impedance: 2X16 Ohm
Power Capacity (AES): 160 W
(2X80 W Above 1000 Hz)
Sensitivity: 2X1W/1m 105dB
Sensitivity: 1W/1m/2.83V 102dB
Frequency Range: 1000-20000 Hz
Voice Coil Diameter: 2X3 Inch (2*76.2 mm)
Magnet Material: Neodymium
Voice Coil Former: Kapton
Diaphragm Material: Polyester
Net Weight: 2.4 Kg

FOLLOW US @ /ATIPROTECH

DIAPHRAGM

DIAPHRAGM



AFX-450

Titanium Dome
Premium Box Packaging
Gold plated Terminals
Heavy Quality Material
High Temperature Copper Wire Winding

DIAPHRAGM



AFX-518

Titanium Dome
Premium Box Packaging
Gold plated Terminals
Heavy Quality Material
High Temperature Copper Wire Winding

DIAPHRAGM



AFX-750

Titanium Dome
Premium Box Packaging
Gold plated Terminals
Heavy Quality Material
High Temperature Copper Wire Winding

NETWORK PLATES

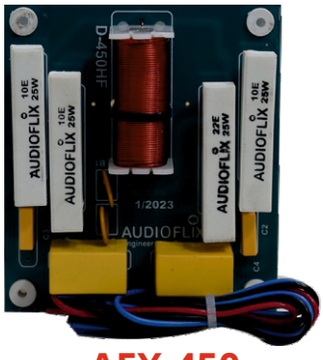

AFX-450

Application
450 HF (60 WATTS)



AFX-750

Application
750 HF (110 WATTS)

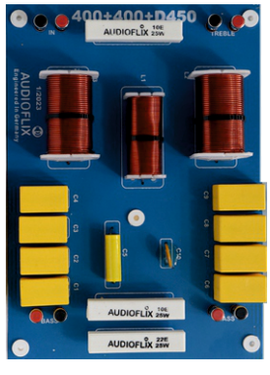

AFX-425

Application
2x300 - 500 Watts 15" Speaker
1x40 - 100 Watts HF

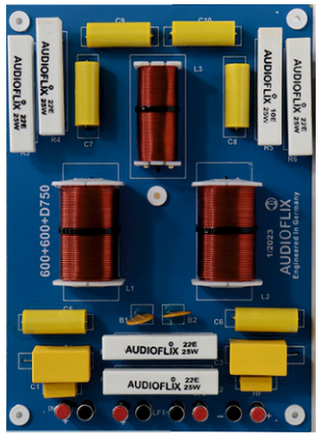

AFX-825

Application
2x600 - 1000 Watts 15" Speaker
1x110 - 150 Watts HF

AMPLIFIER





AFX CA 20+





FX 8000

Model No.	AFX CA 20+	FX 8000
6 Months Warranty		
8Ω stereo power	2x1450W	2x1800W
4Ω stereo power	2x2225W	2x2700W
2Ω stereo power	2x2700W	2x4050W
8Ω Bridge Mono power	4050W	5400W
4Ω Bridge Mono power	5400W	8100W
Signal Noise Ration(dB)	>80dB	>110dB
THD+N (8OHM 1KHZ IN 1/4 OUTPUT)	<0.05%	<0.08%
Damping Factor(8OHM 1K)	>1500	>1500
Slew Rate	>20V/us	>10V/us
Input sensitivity	0.775v/1.0v/1.4v	
Output Circuit	Class H+	Class TD
Frequency Response(+/-0.1db)	20Hz-20kHz +-0.5dB	20Hz-20kHz +-0.5dB
Input connectors(per ch.)	3-pin XLR, electronically balanced	3-pin XLR, electronically balanced
Link connectors(per ch.)	XLR, 3 pin male	XLR, 3 pin male
Input Impedance	20k Ω BALANCED – 10k Ω UNBALABCED	20k Ω BALANCED – 10k Ω UNBALABCED
Output Connectors	NEUTRIK	Speak on Connectors (NEUTRIK)
Amplifier Protection	Protection of short circuit, open circuit, overheat, overload, DC, super sonic frequency etc.	Protection of short circuit, open circuit, overheat, overload, DC, super sonic frequency etc.
Power Requirement		200-240v-50-60Hz
Transport Dimension(CM)	3U:67.5x57x22.5cm	67.8x55x23 cm
Net Weight	40 kgs	36 kgs
Gross Weight	45 kgs	40 kgs

FOLLOW US @ /ATIPROTECH


GLABS
BY ATI PRO TECHNOLOGIES

FERRITE SERIES



12FW76

RMS POWER- 500 WATT
SENSITIVITY- 97dB
VOICE COIL- 3 INCH
FREQUENCY- 50HZ- 3.5KHZ

12

FERRITE SERIES



MB12X351

RMS POWER- 650 WATT
SENSITIVITY- 97dB
VOICE COIL- 3.5 INCH
WEATHER PROTECT CONE

12

NEO SERIES



GLMB12N351 NEO

RMS POWER- 500 WATT
SENSITIVITY- 97dB
VOICE COIL- 3 INCH
FREQUENCY- 50HZ- 3.5KHZ

12

FERRITE SERIES



GL15X351

Rms Power– 550 Watt
Max Power– 1100 Watt
Nominal Impedance– 8 Ohms
Voice Coil– 3.5 Inch In/Out

15

FERRITE SERIES

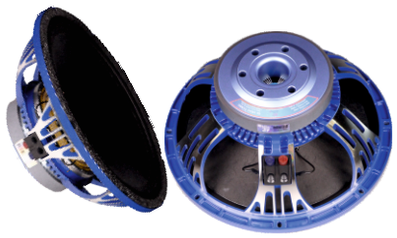

GL15X351 TURBO

Rms Power– 550 Watt
Max Power– 1100 Watt
Nominal Impedance– 8 Ohms
Voice Coil– 3.5 Inch In/Out
Magnet Diameter– 190×90×25 mm

15

FERRITE



GLA15X400

RMS POWER- 400 WATT
SENSITIVITY- 97dB
VOICE COIL- 3 INCH
FREQUENCY- 45HZ- 4KHZ

15

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



GL15X400 TURBO

Power Rating– 410 Watts
Nominal Impedance– 8 Ohm
Power Max– 820 Watts
Sensitivity– 97 dB
Frequency Range– 45-4000 Hz
Magnet Diameter– 190×90×25 mm
Voice Coil Diameter– 76.2/3 mm/inch
Voice Coil Material– CCAW
Number Of Layers– inside/outside

15

FERRITE SERIES



GL15X401

RMS Power– 444 Watts
Max Power– 888 Watts
Nominal Impedance– 8 Ohms
Voice Coil– 3 Inch In/Out

15

FERRITE SERIES



GL15X601

Rms Power– 666 Watt
Max Power– 1332 Watt
Impedance– 8 Ohm
Voice Coil– 4 Inch In/Out
Frequency Range– 36Hz-2.6KHz

15

FERRITE SERIES



GLA15X800

RMS POWER- 800 WATT
SENSITIVITY- 97dB
VOICE COIL- 4 INCH
FREQUENCY- 40HZ- 2.5KHZ

15

FERRITE SERIES



GL15X800 TURBO

Power Rating– 800 Watts
Nominal Impedance– 8 Ohm
Power Max– 1600 Watts
Sensitivity– 97 dB
Frequency Range– 40-2500 Hz
Magnet Diameter– 220×110×25 mm
Voice Coil Diameter– 99.6/4 mm/inch
Voice Coil Material– CCAW
Number Of Layers– inside/outside

15

FERRITE SERIES



GLA15X1000

RMS POWER- 1000 WATT
SENSITIVITY- 97dB
VOICE COIL- 4 INCH
FREQUENCY- 40HZ- 2KHZ

15

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



GL15X1000 TURBO

Power Rating– 1000 Watts
Nominal Impedance– 8 Ohm
Power Max– 1999 Watts
Sensitivity– 97 dB
Frequency Range– 40-2000 Hz
Magnet Diameter– 220×110×30 mm
Voice Coil Diameter– 99.6/4 mm/inch
Voice Coil Material– CCAW
Number Of Layers– inside/outside

15

FERRITE SERIES



GL 15 1000

Power Rating– 1000 Watts
Nominal Diameter– 15 inch
Nominal Impedance– 8 Ohm
Power Max– 2000 Watts
Sensitivity– 97.5 dB
Frequency Range– 32-1.5 KHz
Magnet Diameter– 220×110×30 mm
Voice Coil Diameter– 100/4 mm/inch
Number Of Layers– inside/outside

15

FERRITE SERIES



PD 2.5-K

RMS POWER– 1999+500 WATT
SENSITIVITY– 98 dB
VOICE COIL– 5.5″ In/Out (4 Layers)
IMPEDANCE– 8 Ohms
Magnet Size – 280*170*20 Y35
Dual Magnet
FREQUENCY– 35HZ- 1.5KHZ

18

FERRITE SERIES



PD 3.0-K

RMS POWER– 1999+999 WATT
SENSITIVITY– 98 dB
VOICE COIL– 6″ In/Out (4 Layers)
IMPEDANCE– 8 Ohms
Magnet Size – 280*170*20 Y35
Dual Magnet
FREQUENCY– 40HZ- 1.5KHZ

18

NEO SERIES



GL451 NEO

RMS POWER- 2200 WATT
SENSITIVITY- 95dB
VOICE COIL- 4.5 INCH
FREQUENCY- 41HZ- 1KHZ

18

NEO SERIES



GL451 TURBO

RMS POWER- 2200 WATT
SENSITIVITY- 95 dB
VOICE COIL- 4.5 INCH
FREQUENCY- 41HZ- 1.0KHZ

18

FOLLOW US @ /ATIPROTECH

FERRITE SERIES



GL1851

RMS POWER- 2300 WATT
SENSITIVITY- 99dB
VOICE COIL- 5.2 INCH
FREQUENCY- 41HZ- 2KHZ

18

FERRITE SERIES



GL PD1852 HD

RMS POWER- 1999+300 W
SENSITIVITY- 99dB
VOICE COIL- 5" In/Out
FREQUENCY- 35-1.5 Hz

18

FERRITE SERIES



GL21X3500HD

DJ Speaker 21 Inch 1999+1500 Watt
RMS POWER– 1999+1500 Watts
MAX POWER– 3999+3000 Watts
SENSITIVITY– 97 dB
VOICE COIL– 6 Inch In/Out (4 Layer)
FREQUENCY RANGE– 36Hz-1.5Khz
MAGNET DIAMETER– 330x170x30 mm
VOICE COIL DIAMETER– 150/6 mm/inch
MINIMUM IMPEDANCE– 5.6 Ohm
VOICE COIL MATERIAL– PICCAW
FORMER MATERIAL– GBF
VOICE COIL WINDING HEIGHT– 37/1.46
NUMBER OF LAYERS– 4F Inside/Outside

21

FERRITE SERIES



GL21X4000HD

DJ Speaker 21 Inch 1999+1999 Watt
RMS POWER– 1999+1999 Watts
MAX POWER– 3999+3999 Watts
SENSITIVITY– 98 dB
VOICE COIL– 6 Inch In/Out (4 Layer)
FREQUENCY RANGE– 36Hz-1.5Khz
MAGNET DIAMETER– 330x170x20X2 mm
VOICE COIL DIAMETER– 150/6 mm/inch
MINIMUM IMPEDANCE– 5.6 Ohm
VOICE COIL MATERIAL– PICCAW
FORMER MATERIAL– GBF
VOICE COIL WINDING HEIGHT– 37/1.46
NUMBER OF LAYERS– 4F Inside/Outside

21

NEO SERIES



GL21SW152

RMS POWER- 2500 WATT
SENSITIVITY- 97dB
VOICE COIL- 6 INCH
FREQUENCY- 40HZ- 1KHZ

21

FOLLOW US @ /ATIPROTECH

AMPLIFIERS





GL20000TD

Stereo (Channels)- POWER FOR EACH CHANNELS
8Ω/FTC20HZ-20KHZ@0.1%THD – 2x2500W
4Ω/FTC20HZ-20KHZ@0.1%THD – 2x4500W
2Ω/FTC20HZ-20KHZ@0.1% THD – 2x6500W
Bridged (Single Channel) – POWER
8Ω/FTC20HZ-20KHZ@0.1%THD – 4400W
4Ω/FTC20HZ-20KHZ@0.1% THD – 7500W
S/N (20HZ-20KHZ) 80 – 99dB
THD (@8Ω 1KHZ) – <0.5%
Input Impedance – 20KΩ
Frequency Response – 20HZ-20KHZ
Circuit Type – CLASS TD
Damping Factor – >3000 8Ω
Cooling System – 2 Fans
In/Output Connection – Input: Balance Female XLR
Control – Volume Control for each channel
Stereo/Parallel/Bridge Denote,
Low cut, Crossover for 384 Channels

Indicator light – ON ACTIVE SIG SIGNAL PRO PROTECT CLIP
Protection – Short, Auto Limited, Over load AC/DC protection
Power Supply – 110V (Could be customized),220V (Default)

Z4.20 HUNTER SERIES

Output Power Stereo (RMS) – 4x2100W @ 8ohm
Output Power Stereo (RMS) – 4x3360W @ 4ohm
Output Power Stereo (RMS) – 4 x 5040W 2ohm
Bridge Mode (RMS) – 2x4200W @ 16ohm
Bridge Mode (RMS) – 2x 6930W @ 8ohm
Bridge Mode (RMS) – 2x8820W @ 4ohm
Frequency Response – 10Hz – 20KHz / ±0.35dB
THD+N (20Hz-20KHz – <0.5% @ 8Ω1kHz
S/N Rate (20Hz-20 kHz) – >102dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 45.5dB (0,775V:130V)
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/ 20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets / 2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit,
Operating Voltage – 110V/220V available

FOLLOW US @ /ATIPROTECH

AMPLIFIERS





Z4.15 HUNTER SERIES

Output Power Stereo (RMS) – 4 x 1600W @ 8ohm
Output Power Stereo (RMS) – 4 x 2560W @ 4ohm
Output Power Stereo (RMS) – 4 x 3840W @ 2ohm
Bridge Mode (RMS) – 2 x 3200W @ 16ohm
Bridge Mode (RMS) – 2 x 5280W @ 8ohm
Bridge Mode (RMS) – 2 x 6720W @ 4ohm
Frequency Response – 10Hz – 20KHz / ±0.35dB
THD+N (20Hz-20KHz – <0.5% @ 8Ω1kHz
S/N Rate (20Hz-20 kHz) – >102dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 43.3dB (0.775V:113V)
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/ 20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets / 2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit,
Operating Voltage – 110V/220V available
Power Supply – 110V (Could be customized),220V (Default)

Z2.20 HUNTER SERIES

Output Power Stereo (RMS) – 2 x 2000W @ 8ohm
Output Power Stereo (RMS) – 2 x 3350W @ 4ohm
Output Power Stereo (RMS) – 2 x 4950W @ 2ohm
Bridge Mode (RMS) – 4000W @ 16ohm
Bridge Mode (RMS) – 6600W @ 8ohm
Bridge Mode (RMS) – 8400W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.35dB
THD+N (20Hz-20KHz) – <0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >102dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 45dB (0.775V:127V)
Input Sensitivity – 0.775V,1V,1.4V,2V
Input Impedance – 10K Ω balance/20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets /2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit
Operating Voltage – AC 100V-260V/50Hz-60Hz

FOLLOW US @ /ATIPROTECH

AMPLIFIERS



Z2.25 HUNTER SERIES



Z2.45 HUNTER SERIES



Z4.28 HUNTER SERIES

Model	Z2.25	Z2.45	Z4.28
Output Power Stereo (RMS)	2 x 2600W @ 8ohm	2 x 4500W @ 8ohm	2 x 3000W @ 8ohm
Output Power Stereo (RMS)	2 x 4355W @ 4ohm	2 x 8000W @ 4ohm	2 x 4800W @ 4ohm
Output Power Stereo (RMS)	2 x 6435W @ 2ohm	2 x 11100W @ 2ohm	2 x 7200W @ 2ohm
Bridge Mode (RMS)	5200W @ 16ohm	9000W @ 16ohm	6000W @ 16ohm
Bridge Mode (RMS)	8580W @ 8ohm	16000W @ 8ohm	9900W @ 8ohm
Bridge Mode (RMS)	10920W @ 4ohm	18900W @ 4ohm	12600W @ 4ohm
Frequency Response	10Hz-20KHz/±0.35dB	10Hz-20KHz/±0.35dB	10Hz-20KHz/±0.35dB
THD+N (20Hz-20KHz)	<0.5% @ 801kHz	<0.5% @ 801kHz	<0.5% @ 801kHz
S/N Rate (20Hz-20 kHz)	>102dB	>102dB	>102dB
Crosstalk (1KHz)	>70dB	>70dB	>70dB
Slew Rate	>30v/με	>30v/με	>30v/με
Damping Factor	>5000 (8Ohm) 20Hz to 100Hz	>5000 (8Ohm) 20Hz to 100Hz	>5000 (8Ohm) 20Hz to 100Hz
Voltage Gain	46dB (0.775V:144V)	50dB (0.775V:190V)	47.5dB (0.775V:155V)
Input Sensitivity	0.775V,1V,1.4V	0.775V,1V,1.4V,2V	0.775V,1V,1.4V
Input Impedance	10K Ω balance/20K Ω unbalance		
Input Connectors	XLR Active balanced / pin1 gnd/pin 2+/pin3-		
Output Connectors	2 Neutrik NL4 Sockets /2 input posts		4 Neutrik NL4 Sockets
Protection	short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit		
Operating Voltage	AC 100V-260V/50Hz-60Hz	AC 100V-260V/50Hz-60Hz	AC 100V-260V/50Hz-60Hz
Fuse		F-30A*2	
Power consumption (Idle)		<170W	
Power consumption (Max)		<9500W	
Circuit		Class D	
Dimensions (LxWxD)		500mmx483mm×45mm (1U)	
Net Weight		12.5Kg	
Gross Weight		16.5 Kg	

FOLLOW US @ /ATIPROTECH

AMPLIFIERS



Z4.11 HUNTER SERIES



HT4.11 HUNTER SERIES



HT4.9 HUNTER SERIES

Model	Z4.11 DSP	HT4.11	HT4.9
Output Power Stereo (RMS)	4 x 1200W @ 8ohm	4 x 1200W @ 8ohm	4 x 1000W @ 8ohm
Output Power Stereo (RMS)	4 x 2000W @ 4ohm	4 x 1920W @ 4ohm	4 x 1600W @ 4ohm
Output Power Stereo (RMS)	4 x 3000W @ 2ohm	4 x 2880W @ 2ohm	4 x 7200W @ 2ohm
Bridge Mode (RMS)	2 x 2400W @ 16ohm	2 x 2400W @ 16ohm	2 x 2000W @ 16ohm
Bridge Mode (RMS)	2 x 4000W @ 8ohm	2 x 3960W @ 8ohm	2 x 3300W @ 8ohm
Bridge Mode (RMS)	2 x 6000W @ 4ohm	2 x 5040W @ 4ohm	2 x 4200W @ 4ohm
Frequency Response	10Hz – 20KHz / ±0.35dB	10Hz-20KHz/±0.35dB	10Hz-20KHz/±0.35dB
THD+N (20Hz-20KHz)	<0.5% @ 8Ω1kHz	<0.5% @ 801kHz	<0.5% @ 801kHz
S/N Rate (20Hz-20 kHz)	>102dB	>102dB	>100dB
Crosstalk (1KHz)	>70dB	>70dB	>70dB
Slew Rate	>30v/με	>30v/με	>30v/με
Damping Factor	>3000 (8 Ohm) 20Hz to 100Hz	>3000 (8Ohm) 20Hz to 100Hz	>3000 (8Ohm) 20Hz to 100Hz
Voltage Gain	43.3dB (0.775V:113V)	41.7dB (0.775V:94V)	40.8dB (0.775V:85V)
Input Sensitivity	0.775V,1V,1.4V	0.775V,1V,1.4V,2V	0.775V,1V,1.4V
Input Impedance	10K Ω balance/ 20K Ω unbalance		
Input Connectors	XLR Active balanced pin1 gnd/pin 2+/pin3-		
Output Connectors	2 Neutrik NL4 Sockets / 2 input posts	4 Neutrik NL4 Sockets	4 Neutrik NL4 Sockets
Protection	short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit,		
Operating Voltage	110V/220V available	100V/220V available	100V/220V available
Fuse	F-10A*2		
Power consumption (Idle)	<140W		
Power consumption (Max)	<6100W		
Circuit	Class D		
Dimensions (LxWxD)	483mm×415mm×45mm(1U)		
Net Weight	11Kg		
Gross Weight	15Kg		

FOLLOW US @ /ATIPROTECH

AMPLIFIERS





HT2.7 HUNTER SERIES

Output Power Stereo (RMS) – 2 x 800W @ 8 ohm
Output Power Stereo – 2 x 1280W @ 4ohm
Output Power Stereo – 2 x 1920W @ 2ohm
Bridge Mode (RMS) – 1600W @ 16ohm
Bridge Mode (RMS) – 2640W @ 8ohm
Bridge Mode (RMS) – 3360W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.35dB
THD+N (20Hz-20KHz) – <0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30 ν/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 39.7dB (0.775V:75V)
Input Sensitivity – 0.775V,1V,1.4V,2V
Input Impedance – 10K Ω balance/20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets /2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit,
Operating Voltage – 110V/220V available

HT4.7 HUNTER SERIES

Output Power Stereo(RMS) – 4x800W@8ohm
Output Power Stereo(RMS) – 4x1280W@4ohm
Output Power Stereo(RMS) – 4x1920W@2ohm
Bridge Mode(RMS) – 2x1600W@16ohm
Bridge Mode(RMS) – 2x2640W@8ohm
Bridge Mode(RMS) – 2x3360W@4ohm
Frequency Response – 10Hz-20KHz/±0.35dB
THD+N (20Hz-20KHz) – <0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30ν/με
Damping Factor – >3000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 39.7dB (0.775V:75V)
Input Sensitivity – 0.775V, 1V, 1.4V,2V
Input Impedance – 10K Ω balance/ 20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3
Output Connectors – 4 Neutrik NL4 Sockets
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit
Operating Voltage – 110V/220V available

FOLLOW US @ /ATIPROTECH

AMPLIFIERS





SP4120OH HUNTER SERIES

Output Power Stereo (RMS) – 4 x 1400W @ 8ohm
Output Power Stereo (RMS) – 4 x 2100W @ 4ohm
Bridge Mode (RMS) – 2 x 2800W 16ohm
Bridge Mode (RMS) – 2 x 4200W @ 8ohm
Bridge Mode (RMS) – 2 x 5000W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.2dB
THD+N (20Hz-20KHz) – <0.5% @ 821kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (80hm) 20Hz to 100Hz
Voltage Gain – 42dB (0,775V:98V)
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/20K Ω unbalance
Input Connectors – XLR Active balanced
Input Connectors – pin1 gnd/pin 2+/pin3-
Output Connectors – 4 Neutrik NL4 Sockets
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit
Operating Voltage – 110V/220V available

SP4140OH HUNTER SERIES

Output Power Stereo (RMS) – 4 x 1600W @ 8ohm
Output Power Stereo (RMS) – 4 x 2400W @ 4ohm
Bridge Mode (RMS) – 2 x 3200W 16ohm
Bridge Mode (RMS) – 2 x 4800W 8ohm
Bridge Mode (RMS) – 2 x 6400W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.2dB
THD+N (20Hz-20KHz) – <0.5% @ 821kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (80hm) 20Hz to 100Hz
Voltage Gain – 42.7dB (0,775V:106V)
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/20K Ω unbalance
Input Connectors – XLR Active balanced
Input Connectors – pin1 gnd/pin 2+/pin3-
Output Connectors – 4 Neutrik NL4 Sockets
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit
Operating Voltage – 110V/220V available

FOLLOW US @ /ATIPROTECH

AMPLIFIERS





SP1250H HUNTER SERIES

Output Power Stereo (RMS) – 2 x 1250W @ 8ohm
Output Power Stereo (RMS) – 2 x 1875W @ 4ohm
Output Power Stereo (RMS) – 2 x 2500W @ 2ohm
Bridge Mode (RMS) – 2500W @ 16ohm
Bridge Mode (RMS) – 3750W @ 8ohm
Bridge Mode (RMS) – 5000W @ 4ohm
Frequency Response – 10Hz – 20KHz / ±0.35dB
THD+N (20Hz-20KHz – <0.5% @ 8Ω1kHz
S/N Rate (20Hz-20 kHz) – >102dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 42.5dB (0.775V:100V
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/ 20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets / 2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit
Operating Voltage – 110V/220V available

SP4800H HUNTER SERIES

Output Power Stereo (RMS) – 4 x800W Bohm
Output Power Stereo (RMS) – 4 x 1200W @ 4ohm
Bridge Mode (RMS) – 2 x 1600W @ 16ohm
Bridge Mode (RMS) – 2 x2400W @ 8ohm
Bridge Mode (RMS) – 2 x3200W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.4dB
THD+N (20Hz-20KHz) – €0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >28v/με
Damping Factor – >3000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 40.3dB (0.775V:80.5V)
Input Sensitivity – 0.775 V.1 V.1.4V
Input Impedance – 10K Q balance/20K unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 4 Neutrik NL4 Sockets/4 input posts
Protection – short-circuit, DC overload, overheat,ultrasonic, RF, voltage peak lim it
Operating Voltage – 110V/220V available

FOLLOW US @ /ATIPROTECH

AMPLIFIERS



SP41000H HUNTER SERIES

Output Power Stereo (RMS) – 4 x 1200W @ 8 ohm
Output Power Stereo (RMS) – 4 x 1800W @ 4ohm
Bridge Mode (RMS) – 2 x 2400W @ 16ohm
Bridge Mode (RMS) – 2 x 3600W @ 8 ohm
Bridge Mode (RMS) – 2 x 4500W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.4dB
THD+N (20Hz-20KHz) – €0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >28v/με
Damping Factor – >3000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 42dB (0.775V:98V)
Input Sensitivity – 0.775 V.1 V.1.4V
Input Impedance – 10K Q balance/20K unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 4 Neutrik NL4 Sockets/4 input posts
Protection – short-circuit, DC overload, overheat,ultrasonic, RF, voltage peak lim it



GL25000TD

Stereo (Channels)- POWER FOR EACH CHANNELS
8Ω/FTC20HZ-20KHZ@0.1%THD – 2x2200W
4Ω/FTC20HZ-20KHZ@0.1%THD – 2x3750W
2Ω/FTC20HZ-20KHZ@0.1% THD – 2x4800W
Bridged (Single Channel) – POWER
8Ω/FTC20HZ-20KHZ@0.1%THD – 4400W
4Ω/FTC20HZ-20KHZ@0.1% THD – 7500W
S/N (20HZ-20KHZ) 80 – 99dB
THD (@8Ω 1KHZ) – <0.5%
Input Impedance – 20KΩ
Frequency Response – 20HZ-20KHZ
Circuit Type – CLASS TD
Damping Factor – >3000 8Ω
Cooling System – 2 Fans
In/Output Connection – Input: Balance Female XLR
Control – Volume Control for each channel
Stereo/Parallel/Bridge Denote,
Low cut, Crossover for 384 Channels

Indicator light – ON ACTIVE SIG SIGNAL PRO PROTECT CLIP
Protection – Short, Auto Limited, Over load AC/DC protection
Power Supply – 110V (Could be customized),220V (Default)

FOLLOW US @ /ATIPROTECH

AMPLIFIERS



SP5000H HUNTER SERIES

Output Power Stereo (RMS) – 4 x 1000W @ 8ohm
Output Power Stereo (RMS) – 4 x 1500W @ 4ohm
Bridge Mode (RMS) – 2x2000W @ 16ohm.
Bridge Mode (RMS) – 2 x 3000W @ 8ohm
Bridge Mode (RMS) – 2 x 4000W @ 4ohm
Frequency Response – 10Hz-20KHz/±0.4dB
THD+N (20Hz-20KHz) – €0.5% @ 801kHz
S/N Rate (20Hz-20 kHz) – >100dB
Crosstalk (1KHz) – >70dB
Slew Rate – >28v/με
Damping Factor – >3000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 41.3dB (0.775V:89.5V
Input Sensitivity – 0.775 V.1 V.1.4V
Input Impedance – 10K Q balance/20K unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 4 Neutrik NL4 Sockets/4 input posts
Protection – short-circuit, DC overload, overheat,ultrasonic, RF, voltage peak lim it
Operating Voltage – 110V/220V available



SP1050H HUNTER SERIES

Output Power Stereo (RMS) – 2 x 1050W @ 8ohm
Output Power Stereo (RMS) – 2 x 1575W @ 4ohm
Output Power Stereo (RMS) – 2 x 2100W @ 2ohm
Bridge Mode (RMS) – 2100W @ 16ohm
Bridge Mode (RMS) – 3150W @ 8ohm
Bridge Mode (RMS) – 4200W @ 4ohm
Frequency Response – 10Hz – 20KHz / ±0.35dB
THD+N (20Hz-20KHz – <0.5% @ 8Ω1kHz
S/N Rate (20Hz-20 kHz) – >102dB
Crosstalk (1KHz) – >70dB
Slew Rate – >30v/με
Damping Factor – >5000 (8Ohm) 20Hz to 100Hz
Voltage Gain – 40.5dB (0.775V:82.5V
Input Sensitivity – 0.775V,1V,1.4V
Input Impedance – 10K Ω balance/ 20K Ω unbalance
Input Connectors – XLR Active balanced pin1 gnd/pin 2+/pin3-
Output Connectors – 2 Neutrik NL4 Sockets / 2 input posts
Protection – short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit

FOLLOW US @ /ATIPROTECH

AMPLIFIERS



SP450H HUNTER SERIES



SP650H HUNTER SERIES



SP850H HUNTER SERIES

Model	SP450 H	SP650 H	SP850 H
Output Power Stereo (RMS)	2 x 450W @ 8ohm	2 x 650W @ 8ohm	2 x 850W @ 8ohm
Output Power Stereo (RMS)	2 x 675W @ 4ohm	2 x 975W @ 4ohm	2 x 1275W @ 4ohm
Output Power Stereo (RMS)	2 x 900W @ 2ohm	2 x 1300W @ 2ohm	2 x 1700W @ 2ohm
Bridge Mode (RMS)	900W @ 16ohm	1300W @ 16ohm	1700W @ 16ohm
Bridge Mode (RMS)	1350W @ 8ohm	1950W @ 8ohm	2550W @ 8ohm
Bridge Mode (RMS)	1800W @ 4ohm	2600W @ 4ohm	3400W @ 4ohm
Frequency Response	10Hz-20KHz	10Hz-20KHz	10Hz-20KHz
THD+N (20Hz-20KHz)		<0.5% @ 821kHz	<0.5% @ 821kHz
S/N Rate (20Hz-20 kHz)	>100dB	>100dB	>100dB
Crosstalk (1KHz)		>70dB	>70dB
Slew Rate		>30v/με	>30v/με
Damping Factor	>5000 (8 0hm)	>5000 (8 0hm)	>5000 (8 0hm)
Voltage Gain		39.4dB (0.775V:72.5V)	40.5dB (0.775V:82.5V)
Input Sensitivity	0.775V,1V,1.4V	0.775V,1V,1.4V	0.775V,1V,1.4V
Input Impedance	10K Ω balance/20K Ω unbalance		
Input Connectors	XLR Active balanced / pin1 gnd/pin 2+/pin3-		
Output Connectors	4 Neutrik NL4 Sockets		
Protection	short-circuit, DC, overload, overheat, ultrasonic, RF, voltage peak limit		
Operating Voltage	110V/220V available	110V/220V available	110V/220V available
Fuse	F-10A		
Power consumption (Idle)			
Power consumption (Max)			
Circuit	Class H		
Dimensions (LxWxD)	483mm×350mm×90mm (2U)		
Net Weight	17.5 kg		
Gross Weight	19 kg		

FOLLOW US @ /ATIPROTECH

DIGITAL MIXER



GDM 32

Input – 32 CH (28 MIC + 2 LINE)
Display Screen Size – 10 inch
Resolution Ratio – 1024*600
Touch Control – Capacitance
Main Control CPU – AK3760E
Operating System – Linux
Analog Output – 14 AUX
Frequency Response – 20Hz-20KHz
Electric Fader – 16
Effector – 2 X 16 Types of Effects
WIFI – 150 m
Limitor – 32 channel
Power Supply – AC100v-240v 50/60 Hz



GMBL 32

Model – GMBL 32
Input – 32 CH
Main Control CPU – AK3760E
Start up Speed – 22 s
Operating System – Linux
Analog Output – 14 AUX
Dynamic Range – 108 dB
Frequency Response – 20Hz-20KHz
Effector – 2 X 16 Types of Effects
WIFI – 150 m
Dimensions (Width*Depth*Height) – 400*225*230 mm
Power Supply – AC100v-240v 50/60 Hz

FEEDBACK PROCESSOR



GL-6.0 TR

Signal Sampling : 24-Bit/96kHz
Frequency Response : 50-20kHz
Signal to Noise Ratio : 110 dB
Distortion : <1% @ 1kHz
6 Inputs & 6 Outputs
Supports 5 Levels Of Feedback Suppression Mode Settings
Maximum Audio Input Signal Impedance 700 ohms.

FOLLOW US @ /ATIPROTECH



PRO LIGHTS

BY ATIPRO TECHNOLOGIES



SP950

Power supply: AC 100V 240V 50max 60Hz
Power: 600W
Bulb: 380W
Control mode: voice control, built-in program, master-slave computer, DMX512 signal control
Number of DMX512 channels: 16 beat 17 channels
Color plate: a color plate, which is composed of 14 color plates and blank space.
Pattern plate: a pattern plate with 14 patterns.
Prism: 4 **prisms:** an octagonal prism, a 16 prism, a 24 prism, a six-row prism; multiple prism effects
Lens: multiple sets of high-precision lens combinations, advanced optical design, maximum efficiency use of light source, brighter and fuller beam
Focusing: linear focusing
Heat dissipation system: built-in cooling mute fan forced air cooling, electronic temperature control overheat protection
Fuselage material: high temperature resistant plastic + molded alloy material
Connection mode: 3-core card seat DMX input and output, power input
IP protection level: Ip20
Net weight: 15.05KG



ZOOM 163

Voltage: AC 100–240V, 50/60Hz
Power Consumption: 500W
Output Voltage: 28V
·LED Configuration:
540 × 5050 RGB LEDs (0.25W each)
450 × 3030 Dual-Color LEDs
Control Modes: DMX512, Auto Run, Master-Slave, Sound Activated, RDM
DMX Channels: 12CH / 26CH / 283CH
Pixel Control:
60 RGB Segments
100 Dual-Color Segments
Single Point Control
Dimming: Linear 0–100%
Strobe Frequency: 1–30Hz
Working Temperature: -30°C to 50°C
Connections: DMX Input/Output, Power Input/Output
IP Rating: IP20 (Indoor Use Only)
Dimensions: 430 × 127 × 271 mm
Net Weight: 6 kg





ZOOM 1000

Input Voltage : AC 100V–240V, 50/60Hz
Rated Power : 250 W
Light Source : 18 PCS RGBW 4-in-1 LEDs
Control Modes : DMX512, Sound Active, Auto Mode, Master-Slave
DMX Channels : 4 / 8 Channels
Strobe Speed : 0–20 Flashes per Second (Adjustable)
Protection Rating : IP66 (Dustproof & Waterproof)
Cooling System : Intelligent Fan Cooling System

FOLLOW US @ /ATIPROTECH


ATiPOWER







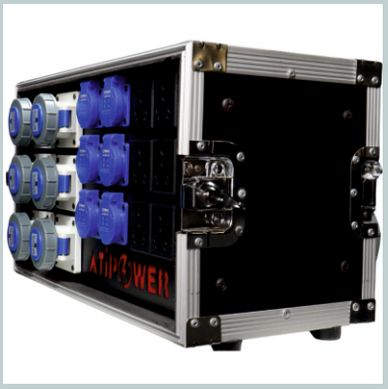

Sr. No.	MODEL	SPECIFICATIONS
1	SPO5R	Single phase board with 16 Amps 2+4 imported socket
2	SPO5P	Single phase board with 16 Amps 4+4 imported socket
3	SPIOR	3-Phase power distribution panel, 32 Amps 10/15 KVA, semi-protection, small flight case, imported plug/socket/meter
4	ATI SP20R	3-Phase power distribution panel, 65 Amps 20/30 KVA, semi-protection, small flight case, imported plug/socket/meter
5	ATI SP45R	3-Phase power distribution panel, 100 Amps 40 KVA, semi-protection, medium flight case, imported plug/socket/meter
6	ATI SP45P	3-Phase power distribution panel, 100 Amps 45 KVA, fully protected with high-quality protection switch, medium flight case, imported plug/socket/meter
7	ATI SP65R	3-Phase power distribution panel, 300 Amps 63 KVA, semi-protection, big flight case, imported plug/socket/meter
8	ATI SP65P	3-Phase power distribution panel, 300 Amps 63 KVA, fully protected with high-quality protection technology, big flight case, imported plug/socket/digital meter
9	ATI SP65PD	3-Phase power distribution panel, 300 Amps 63 KVA, fully protected with high-quality protection technology, jumbo flight case with wheel & drawer, imported plug/socket/digital meter
10	ATI SP125P	3-Phase power distribution panel, 400 Amps 125 KVA, fully protected with high-quality advanced protection technology, jumbo flight case with wheel, German Schuko imported plug/socket, German digital multispan meter
11	ATI SP65P2	3-Phase power distribution panel, 300 Amps 63 KVA, fully protected with high-quality protection technology, big flight case, German plug/socket/digital meter
12	ATI SP125P2	3-Phase power distribution panel, 400 Amps 125 KVA, fully protected with high-quality advanced protection technology, jumbo flight case with wheel, German Schuko Germany plug/socket, German digital multispan meter


ATi
SFX

BUBBLE MACHINE



SF 091

Power Supply– 220-240VAC/ 50-60Hz
Tank Capacity– 1.2L
Heating Element– 1500W
No. Of Colors– 4(Red, Green, Blue, White)
No. Of Led– 48x 3W 3-in-1
Dmx Channels– 8
DMX– Stand-alone Mode
Dmx in/out– 3-pin XLR
Controller– Control Panel With LCD Display/ Remote
Package Dimensions– 45*35*46.5cm
Weight– 12.8KG

BUBBLE MACHINE



SF 090

Power Supply– 220-240VAC/ 50-60Hz
Tank Capacity– 1.2L
Heating Element– 1500W
No. Of Colors– 4(Red, Green, Blue, White)
No. Of Led– 48x 3W 3-in-1
Dmx Channels– 8
DMX– Stand-alone Mode
Dmx in/out– 3-pin XLR
Controller– Control Panel With LCD Display/ Remote
Package Dimensions– 68*45*46.5cm
Weight– 22.6KG

CO2 JET MACHINE



HB 1 LED

ATI SFX CO2 Jet Gun Model – HB 1 LED
Supplies: CO2
Jet Distance: 6-8 Mtr
Control Method: Manual Control
Batteries: 8 pcs AA
Weight: 4.15 KG

CO2 JET MACHINE



HC 1

ATI SFX CO2 Jet Machine Model – HC 1
Voltage: AC 110/220 V 50/60 Hz
Power: 100 W
Supplies: CO2
Jet Distance: 8-10 Mtr
Control Method: DMX 512/ Manual Control
Weight: 6 KG

CO2 JET MACHINE



HC 1CG

ATI SFX Single Head CO2 Jet Machine Model – HC 1CG
Voltage: AC 110/220 V 50/60 Hz
Power: 100 W
Supplies: CO2 Jet
Distance: 8-10 Mtr
Control Method: DMX 512/ Manual Control
Weight: 5 KG

CO2 JET MACHINE



HC 1x2

ATI SFX Single Head CO2 Jet Machine Model – HC 1CG
Voltage: AC 110/220 V 50/60 Hz
Power: 100 W
Supplies: CO2 Jet
Distance: 8-10 Mtr
Control Method: DMX 512/ Manual Control
Weight: 5 KG

FOLLOW US @ /ATIPROTECH

CO2 JET MACHINE



HC 12 LED

ATI SFX 12 LED CO2 Jet Machine
Model – HC 12 LED
Voltage: AC 110/220 V 50/60 Hz
Power: 120 W
Supplies: CO2 Jet
Distance: 8-10 Mtr
Control Method: DMX 512/ Manual Control
Weight: 6 KG

CONFETTI MACHINE



HD-B

ATI SFX LARGE CO2 CONFETTI MACHINE
Model – HD B
Voltage: AC 220 V
Power Source: CO2 or N2
Output Coverage: 8~15 Mtr
Pipe Length: 5 M
Supplies: Bulk Colored Paper
Control: Manually
Weight: 40 KG

CONFETTI MACHINE



HD-5DMX

ATI SFX DMX LARGE CO2 CONFETTI MACHINE
Model – HD 5DMX
Voltage: AC 220 V
Power: 150 W
Power Source: CO2 or N2
Output Coverage: 8~15 Mtr
Pipe Length: 5 M
Supplies: Bulk Colored Paper
Control: DMX 512
Weight: 43 KG

CONFETTI MACHINE



HD 3 LED

ATI SFX LED CONFETTI GUN
Model – HD 3 LED
Supplies: CO2/Confetti
Jet Distance: 6-8 Mtr
Control Method: Manual Control
Weight: 6.3 Kg

CONFETTI MACHINE



HD 3

ATI SFX CONFETTI GUN
Model – HD 3
Control: Hand-Held Manual Operation
Spray Distance (confetti): 10-12 Meters
Spray Distance (CO2) : 6-8 Meters
Supplies: CO2/Confetti
Weight: 4.5 KG

FLAME MACHINE



HK-2

ATI SFX Single Head Flame Machine
Model – HK 2
Voltage: AC 220/240 V 50 Hz/60 Hz
Power: 150 W
Supplies: Spray Oil
Jet Distance: 1.5-3 Mtr
Control Method: DMX 512
Weight: 5 KG

FOLLOW US @ /ATIPROTECH

FLAME MACHINE



HK-3

ATI SFX Triple Head Flame Machine
Model – HK 3
Voltage: AC220/240 V 50/60 Hz
Power: 300 W
Supplies: Spray Oil
Jet Distance: 2-3 Mtr
Control Method: DMX 512
Weight: 7 KG

FOG MACHINE



SF-A002

ATI SFX 48 LED Vertical Fog Machine
Model- SF-A002
Rated Voltage– AC220-240V 50/60Hz
Power– 2000 Watt
Heat-up Time– 4 Minutes
Fuse– F10A
Control Signal– DMX Signal, Manual
Channel– 4 Channel
Dimensions– 435x310x210 mm
Weight– 7.9KG

FOG MACHINE



WATER LOW FOR MACHINE 1500 W

Fog Output– 8000 Cu.ft Per Minute
Warm-up Time– First time 5 Minutes
Fuse– 15A/250V
Power Consumption– 3000W
Power Supply– 220V/110V
Packing Size– 87*64*50cm
Weight– 30 Kgs
Warming Time– 8 min
Tank Capacity– 10L
Control Mode– DMX/Manual/Timer
Water Consumption– 10min/L
DMX Channel– 2Ch

FOG MACHINE



WATER LOW FOR MACHINE 2400 W

Fog Output– 8000 Cu.ft Per Minute
Warm-up Time– First time 5 Minutes
Fuse– 15A/250V
Power Consumption– 6000W
Power Supply– 220V/110V
Packing Size– 62*64*89cm
Weight– 35 Kgs
Warming Time– 8 min
Tank Capacity– 10L
Control Mode– DMX/Manual/Timer
Water Consumption– 10min/L
DMX Channel– 2Ch

FOG MACHINE



HG-1

ATI SFX DRY ICE Machine Model – HG 1
Power: 220V 3500 W / 110V 3000 W
Voltage: 110/220 V 50/60 Hz
Control: Manual
Supplies: Columnar Dry Ice
Preheating Time: 15 Mins
Electronic Temperature Control: 70°C ~ 80°C
Water Consumption: 8 L
Maximum Continues Output Time: 2-3 Mins
Cover Area: About 150 sq ft
Weight: 7.8 Kg

FOLLOW US @ /ATIPROTECH

SPARK MACHINE



SF-01

ATI SFX 1200 W Spark Machine
Model – SF 01
Power Supply: 220-240V 50/60 Hz
Power: 1200 W
Fountain Height: 4-10 Mtr
Tank Capacity: 200 G
Max. Continuous Duration: 20 S (100% Output)
Control Modes: Wireless Controller, DMX, Manual
DMX Channels: 2 Channels
Dimension (W*H*D): 200*270*200 mm
Weight: 5 Kg

SPARK MACHINE



SF-02

ATI SFX 700 W Spark Machine
Model – SF 02
Power Supply: AC220-240V, 50/60 Hz
Power: 500 W
Power Consumption: 700 W
Fuse: 3 A
Spark Emission Height: 2-5 Mtr
Tank Capacity: 70 G
Max Time Of Continuous Emission: 20 Sec (At 100% Capacity)
Operation Modes: Manual, DMX, Wireless Remote Control
DMX Channels: 2
Dimension (W*H*D): 20*27*20 CM
Weight: 5 Kg

SPARK MACHINE



SF-03

ATI SFX 700 W Upside Down Spark Machine
Model – SF 03
Power Supply: 220-240V 50/60 Hz
Power: 700 W
Fountain Height: 2-5 Mtr
Tank Capacity: 200 G
Max. Continuous Duration: 20 S (100% Output)
Control Modes: Wireless Controller, DMX, Manual
DMX Channels: 2 Channels
Dimension (W*H*D): 200*270*200 mm
Weight: 5 Kg

SFX by ATI PRO Technologies is dedicated to dynamic stage effect solutions, offering products like smoke machines, bubble machines, and special effect systems. Designed for impactful visuals and smooth performance, SFX products deliver reliability, durability, and easy operation. Perfect for DJs, events, and stage setups, SFX enhances every performance with immersive atmospheric effects.

DID YOU KNOW?

KRYSTAL TONE

AN INDIAN BRAND

BY ATIPRO TECHNOLOGIES

FERRITE SERIES



KT 12-100

Model Name- KT 12-100
Power Rating- 100 watts
Nominal Diameter- 12 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 1.5 inch
Frame- Iron
Magnet Size- 134*20 Y35

12

FERRITE SERIES



KT 12-200

Model Name- KT 12-200
Power Rating- 200 watts
Nominal Diameter- 12 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 2 inch
Frame- Iron
Magnet Size- 155*20 Y35

12

FERRITE SERIES



KT 12-300

Model Name- KT 12-300
Power Rating- 300 watts
Nominal Diameter- 12 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 3 inch
Frame- Aluminium
Magnet Size- 180*20 Y35

12

FERRITE SERIES



KT 12-400

Model Name- KT 12-400
Power Rating- 400 watts
Nominal Diameter- 12 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 3 inch
Frame– Aluminum
Magnet Size- 190*20 Y35

12

FERRITE SERIES



KT 12-400 B

Model Name- KT 12-400 B
Power Rating- 400 watts
Nominal Diameter- 12 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 3 inch In/Out
Frame- Aluminum
Magnet Size- 190*20 Y35

12

FERRITE SERIES



KT 15-400

Model Name- KT 15-400
Power Rating- 400 watts
Nominal Diameter- 15 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 3 inch
Magnet Size- 190*20 Y35

15

FOLLOW US @ /ATIPROTECH

KRYSTAL TONE

FERRITE SERIES



KT 15-800

Model Name- KT 15-800
Power Rating- 800 watts
Nominal Diameter- 15 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 4 inch
Magnet Size- 220*25 Y35

15

FERRITE SERIES



KT 15-1000

Model Name- KT 15-1000
Power Rating- 1000 watts
Nominal Diameter- 15 inches
Nominal Impedance- 8 ohms
Voice Coil Diameter- 4 inch
Magnet Size- 220*25 Y35

15

KRYSTAL TONE, a sub-brand of ATI PRO Technologies, proudly offers Made in India audio solutions designed for reliability and everyday performance. Focused on affordability, it delivers quality sound, durable build, and efficient output at competitive prices. KRYSTAL TONE is ideal for users seeking dependable audio products without compromising on value or performance.

DID YOU KNOW?

MAKING HISTORY IN DJ INDUSTRY



A proud moment as our CEO, Gaurav Jain Sir was surprised by our devoted dealers with a Govt.-approved Postal Stamp

Honoring Our Award-Winning Guests DJ Shashi, DJ Pankaj, Jai Bhole, Power Music at Indian DJ Expo & MJ Sound Meerut











NAVRATNA AWARD



THIS PRESTIGIOUS NAVRATNA AWARD HONORS ATI PRO DEALERS WHO HAVE DEMONSTRATED OUTSTANDING WORK AND COMMITMENT ACROSS THE NATION."

YODHA AWARD

ATI PRO TECHNOLOGIES



SOCIAL MEDIA AWARD

ATI PRO TECHNOLOGIES



DEALERS CERTIFICATE



























DEALERS CERTIFICATE



























FOLLOW US @ /ATIPROTECH

DEALERS CERTIFICATE



























DEALER NETWORK

ATIPro understands that Indian retail industry has become increasingly demanding and hence brands are looking for partners that delivers to all vertical of the trade. To be successful in India companies have no option but to build a distribution network bottom up.

Our Company takes pride in having built a Pan India Distribution Network, in spite of India being such a diversified market place.

Our Dealers Network : Andhra Pradesh, Assam, Bihar, Chhattisgarh, Goa, Gujarat, Haryana, Himachal Pradesh, Jharkhand, Karnataka, Madhya Pradesh, Maharashtra, Punjab, Rajasthan, Tamil Nadu, Telangana, Uttar Pradesh, Uttarakhand.

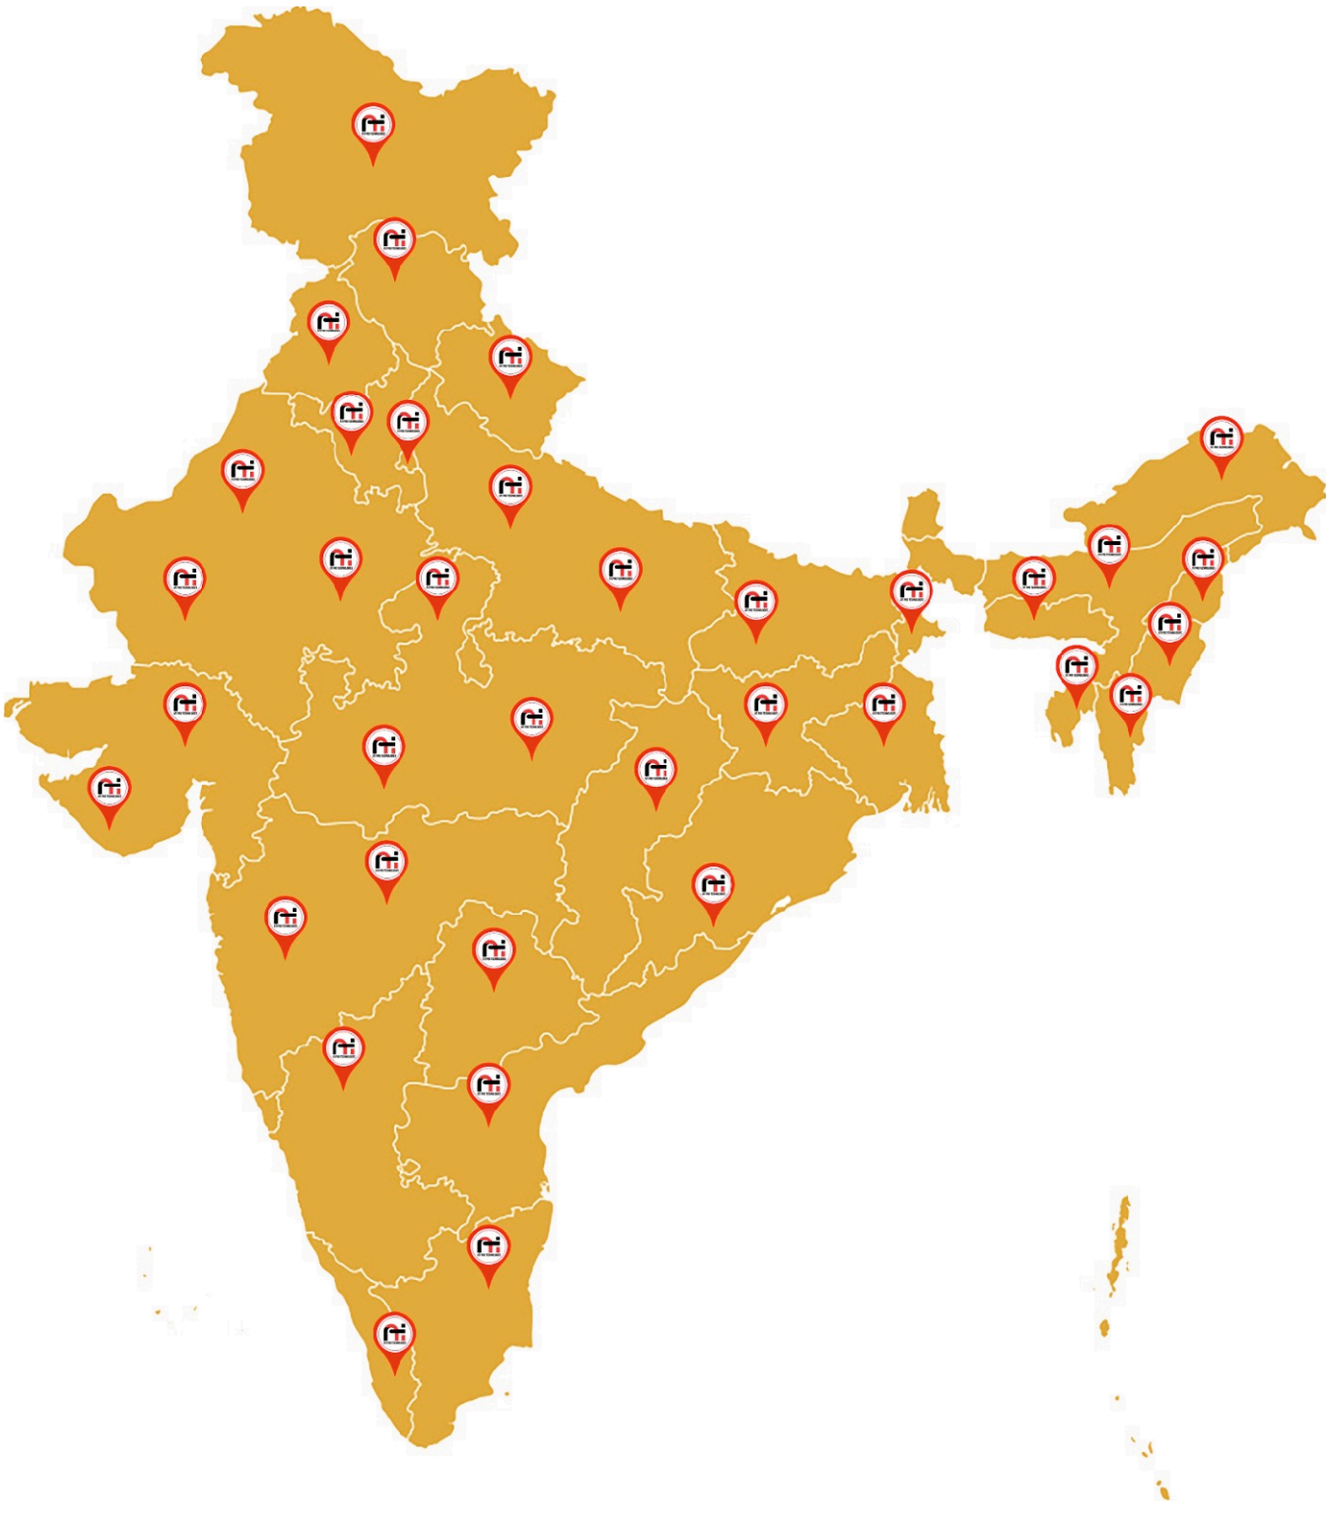

NOTES

MODEL	DESCRIPTION	QTY.	PRICE	TOTAL

NOTES

MODEL	DESCRIPTION	QTY.	PRICE	TOTAL

PRO AUDIO & INSTALLATION

PRO LIGHTING & STAGE SOLUTION

At ATI Pro Technologies, our experienced team of designers places a high value on technical excellence, product reliability, and consistent electro-acoustical functionality. With over 50 years of inspired and deliberate engineering, we have earned nationwide acclaim, particularly from the Indian sound rental community. Our unwavering commitment to performance and quality control sets us apart.

Specializing in lighting and audio products, ATI Pro Technologies conducts most of its engineering and development work in Italy. Our dedication to quality has established us as the premier choice for state-of-the-art high-end transducers.

In addition to our expertise in professional audio, we excel in pro lighting solutions, ensuring comprehensive support for our clients' diverse needs. We never compromise on product or sound quality, remaining steadfast in our pursuit of perfection. ATI Pro Technologies is renowned for its commitment to excellence, allowing us to maintain our leading position in the audio and lighting industry.

WARNING!

Beware of fake products! There are sub-standard amplifiers, microphones, H.F drivers, speakers, diaphragms, and voice coils, etc being falsely sold as genuine ATI Pro Technologies products.

BE VERY CAREFUL

- Obtain your requirements only from authorized ATI Pro Technologies dealers and distributors.
- Always insist on seeing the Authorized Dealer Certificate and ATI Pro Technologies trademark.
- The manufacture and sale of counterfeit products are illegal and punishable by law.

/ATIPROTECH

Dealer